

Daul USB MIDI Host Box (DUH-10) upgrade instructions

About

Through this document, users can upgrade the new version DUH-10 box by themselves. When DOREMiDi has new firmware, it will be announced on the official website. Follow the official latest news: <https://www.doremidi.cn/h-pd-64.html>

Upgrade system requirements: Windows 7 or newer version of Windows system or Mac OS.

Windows: [DOREMiDi Upgrade tool for Windows.zip](#)

MacOS: [DOREMiDi Upgrade tool for MacOS.dmg](#)


(Note: If the link cannot be downloaded, please go to the official website to download the software. www.doremidi.cn)

Step 1: Enter the upgrade mode


- Press and hold the hidden button with the sharp object.
- Then, supply power to DUH-10 through DC IN, and then release the button, the indicator of the USB HOST port will light up.
- Connect the USB HOST to the computer.



Step 2: Open "DOREMiDi Upgrade Tool", select USB, select the COM port to DUH-10, and click "Connect".

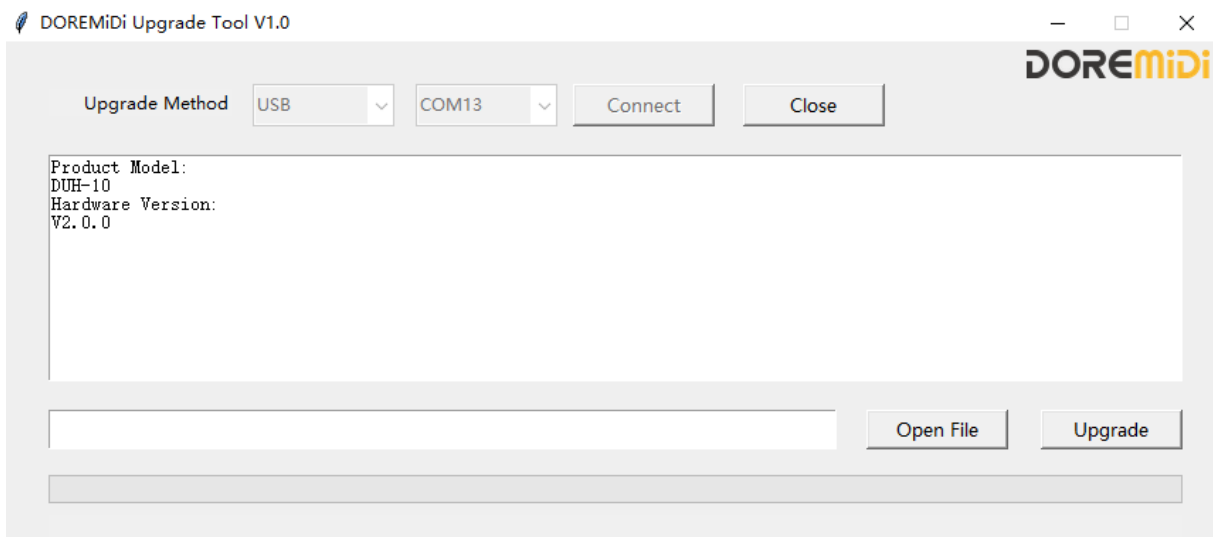

Step 3: Click "Open File", select the upgraded firmware DUH-10_Vxxx, click "Upgrade", and wait for the upgrade to be completed "Upgrade completed!".

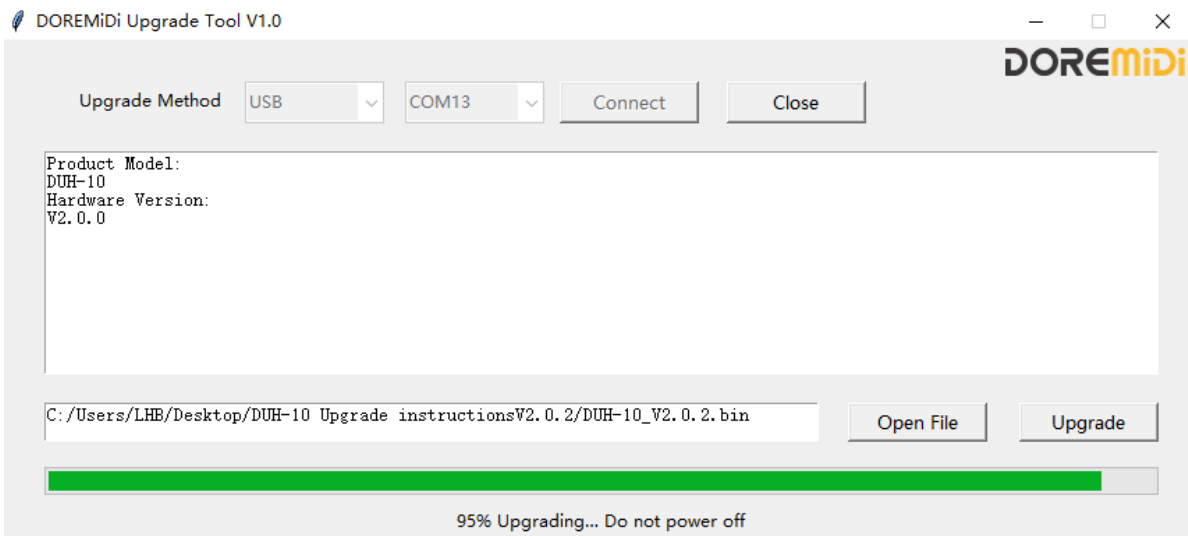

Q&A

Q: How to determine the COM interface?

A: After selecting the COM interface, please try to click "Connect". If it is not a DOREMiDi device, "time out" will be displayed.

Q: After DUH-10 enters the upgrade mode, the computer USB cannot recognize the device.

A: This may be because the computer lacks a driver, please try to install the " Virtual COM Port Driver ". Link: <https://www.doremidi.cn/h-pd-64.html>