

About

Through this document, users can upgrade the MPC-20 box by themselves. When DOREMiDi has a new firmware, it will be announced on the official website. Follow the official latest news:

<https://www.doremidi.cn/h-pd-71.html>

Upgrade system requirements: Windows 7 or newer version of Windows system or Mac OS.

Windows: [DOREMiDi Upgrade tool for Windows.zip](#)


MacOS: [DOREMiDi Upgrade tool for MacOS.dmg](#)

(Note: If the link cannot be downloaded, please go to the official website to download the software. www.doremidi.cn)


Step 1: Enter the upgrade mode : Press and hold the hidden button of MPC-20, and then connect the USB-C of MPC-20 to the computer. The indicator light of MPC-20 will flash, indicating that it has entered the firmware upgrade mode.



Step 2: Open "DOREMiDi Upgrade Tool", select USB, select the COM port to MPC-20, and click "Connect".

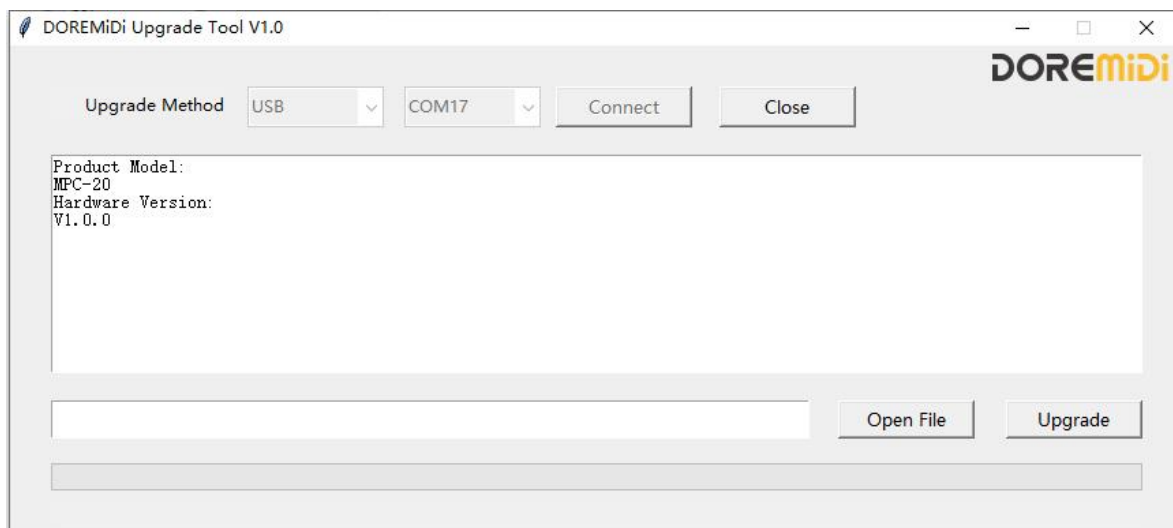

Step 3: Click "Open File", select the upgraded firmware MPC-20_Vxxx, click "Upgrade", and wait for the upgrade to be completed "Upgrade completed!".

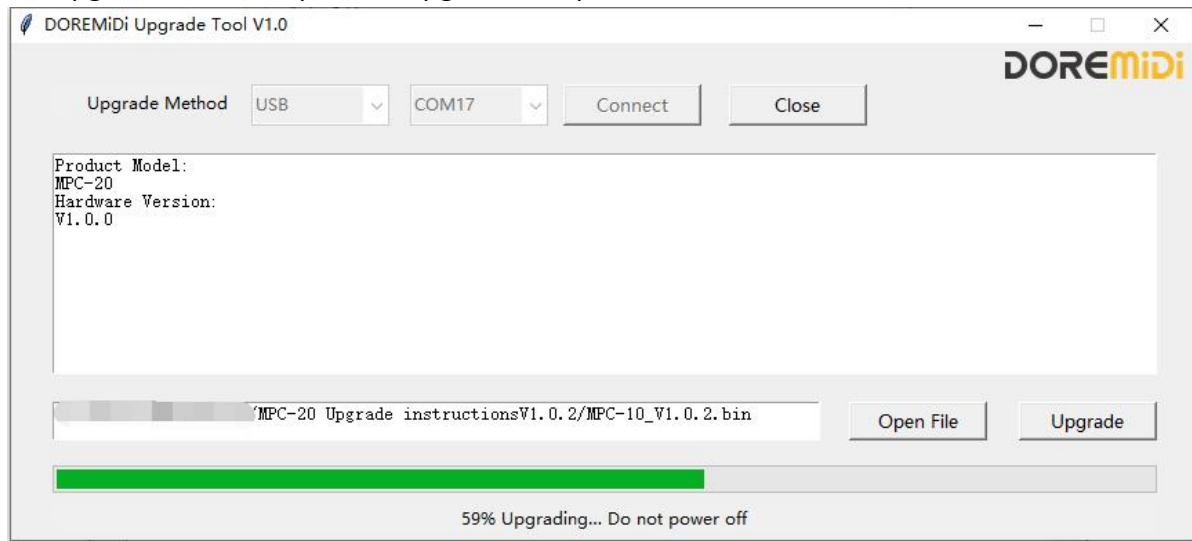

Q&A

Q: How to determine the COM interface?

A: After selecting the COM interface, please try to click "Connect". If it is not a DOREMiDi device, "time out" will be displayed.

Q: After MPC-20 enters the upgrade mode, the computer USB cannot recognize the device.

A: This may be because the computer lacks a driver, please try to install the "Firmware Upgrade Driver". Link: <https://www.doremidi.cn/h-pd-71.html>