

**H85C Series**

- Forend and bolt stainless steel.  
Function of the bathroom  
Fixed follower is installed in the cylinder hole.

**Features**





- According to EN 12209
- For wooden or steel doors
- Suitable for external fire or smoke protection doors
- Prepared for profile cylinders
- With key action
- Deadbolt 1-turns



PZ = Profile cylinder  
(DIN 18252)




**F**

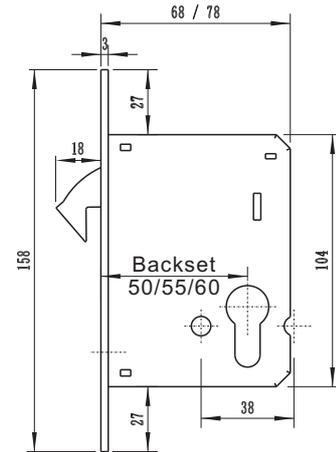


**Type**

- H50SD
- H55SD
- H60SD

**FH03+50SD+HT65K01 Configuration**

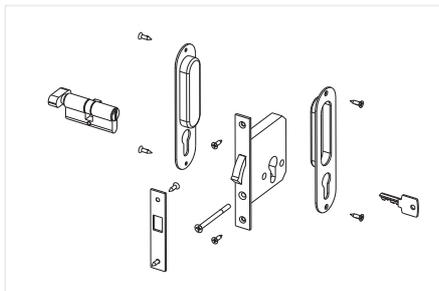

**Function of the bathroom**

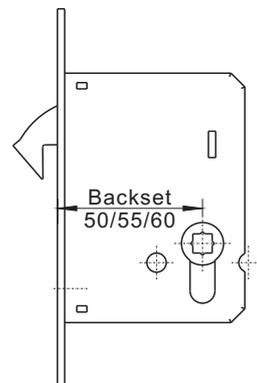

Follower 8X8  
Follower 7X7

**Type**

- H50SD-B
- H55SD-B
- H60SD-B

**Technical Data**

Follower 8X8mm (7X7mm) Stainless steel  
Backset 50mm 60mm

**Forend**

Type round head, square head  
Thickness 3mm  
Width 16, 20, 22mm

**Forend finish**

Stainless steel SSS PSS PVD

**Accessories**

Striking plate-Stainless steel  
Pocket  
Lock and strike plate fixing screws

