


Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan, ≥ 50000 hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;


Size

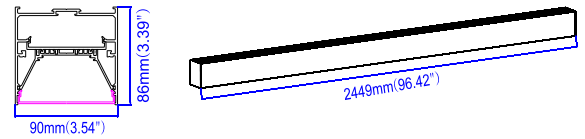


Parameter

Size	2449mm(8.03ft)X90mm(0.3ft)X86mm(0.28ft)
Beam angle	98°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	≥ 0.9
Input power	90W (11.3W/ft)
CCT	3000K/4000K/6000K (3500K 、 5000K)
CRI	80+/90+
Lumen	9425~10000lm(1177~1250lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Surface installation
Package size	2570mm(8.43ft)X145mm(0.48ft)X135mm(0.44ft)
Gross Weight	8.85Kg

Standard color


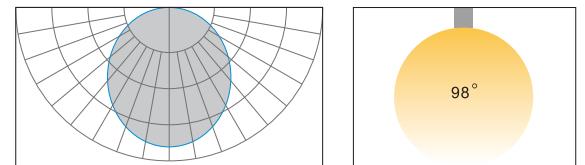


PDM

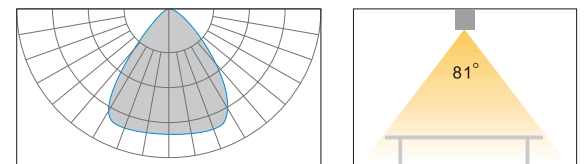

UGR<19

Test report

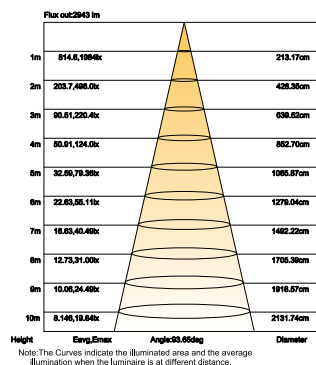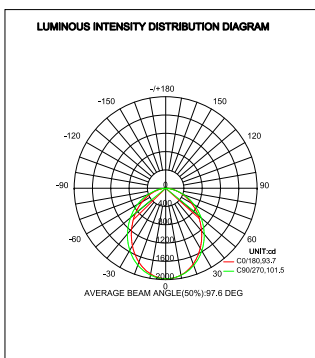


Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance $\pm 10\%$;

Optional accessories

Installation accessories



• Pendant



L-PTB



L-PT



L-PTB-NPF



L-PTB-PF



• Ceiling mounted



L-SM

L-PTB: pendant wires with canopy


L-PT :pendant wires without canopy

L-PTB-NPF: pendant wire + canopy without cable hole

L-PTB-PF: pendant wire + canopy with cable hole

L-SM: screw for ceiling mounted

Disassembly tool

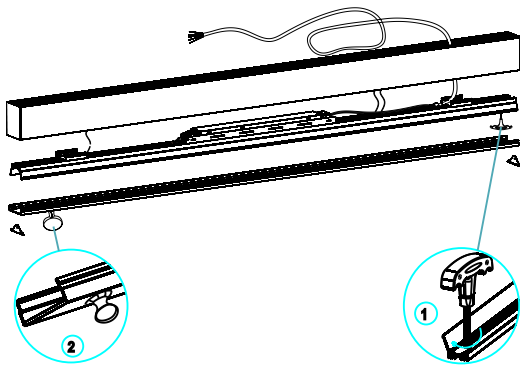

L-DA-D



L-DA-A

• Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker