

## Technical Data Sheet

# Specification

U530A2V86Z1



### BYTECH

Bytech Electronics CO., Ltd is the first company in China to launch the real inorganic package UV LED devices and core components for application based on CMH technology.

CMH technology platform is a kind of package technology which adopts ceramic, metal, hard glass as package materials. CMH technology platform originates independent intellectual property owned by Bytech Electronics CO., LTD, which is suitable for vacuum encapsulation, especially suitable for ensuring reliability of deep UV products.

DESIGN	CHECK	APPROVE
2022.07.20	2022.07.20	2022.07.20
FANG	FANG	REN



**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES



### Features

- Dimension 3.0mm×3.2mm×0.6mm
- Suitable for all SMT process
- It can be over reflow
- Lead-free products

### Applications

- Mosquito lamp
- UVLED light bulbs
- Manicure lamp
- Currency detector
- UV glue curing lamp
- The scorpion lamp
- Other UV lamps

### Package Dimensions(Unit: mm)

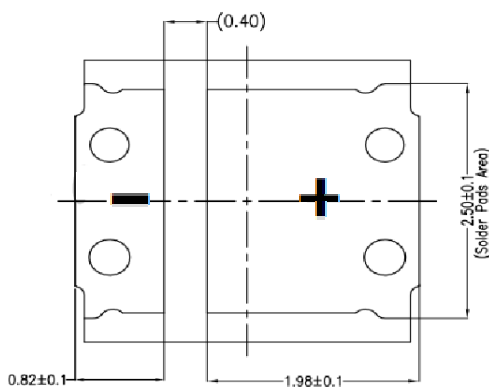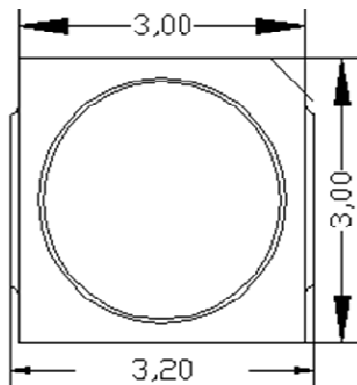

**Tolerance : ± 0.2mm**


### Product ID:

**U530A2V86Z1**

### Where,

- U: Packaging technology, silicone dispensing
- 5: radiation angle, 120° ;
- 30: package size, 3.0mm\*3.0mm;
- A2: peak wavelength, 380-390nm;
- V86: LED chip code, vertical chip;
- Z1: Zener chip code.

### Circuit:

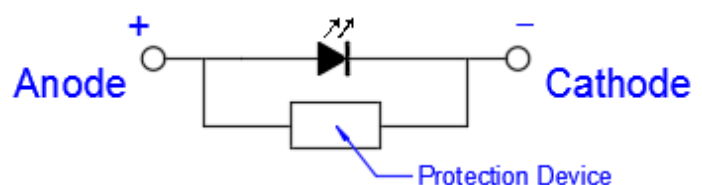

### Characteristics of UV LED

#### 1. Electrical / Optical Characteristics (Ta=25°C , RH=40%)

Parameter	Symbol	Units	U530A2V86Z1 (IF=60mA)
Peak Wavelength [1]	$\lambda_p$	nm	380-390
Radiation Flux [2]	$\Phi_e$ [3]	mW	60-120
Forward Voltage [4]	VF	V	3.0-3.8
Spectrum Half Width	$\Delta\lambda$	nm	10-13
View Angle	$2\theta_{1/2}$	deg	120

#### Notes:

[1].Peak wavelength measurement tolerance:±3nm

[2].Radiant flux measurement tolerance:±10%

[3]. $\Phi_e$  is the total radiant Flux as measured with an integrated sphere

[4].Forward voltage measurement tolerance:±3%


[5]. $R_{th}$  is the thermal resistance between chip junction to PCB board bottom

#### 2. Absolute Maximum Ratings (Ta=25°C,RH=40%)


Parameter	Symbol	Units	U530A2V86Z1
Maximum Rating Forward Current	$I_{Fmax}$	mA	200
Maximum Rating Junction Temperature	$T_{jmax}$	°C	115
Operating Temperature Range	$T_{opr}$	°C	-40 ~ +85
Storage Temperature Range	$T_{stg}$	°C	-20 ~ +65

## Characteristics Diagrams


### 1. Relative Spectrum Power Distribution

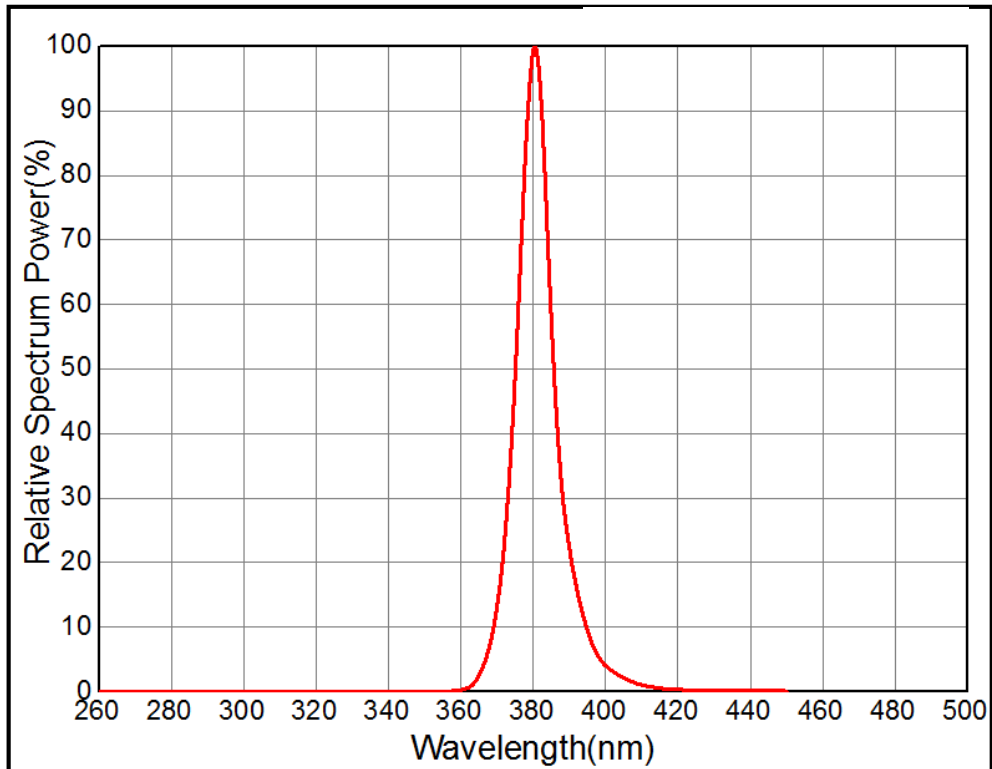


### 2. Forward Voltage vs Forward Current

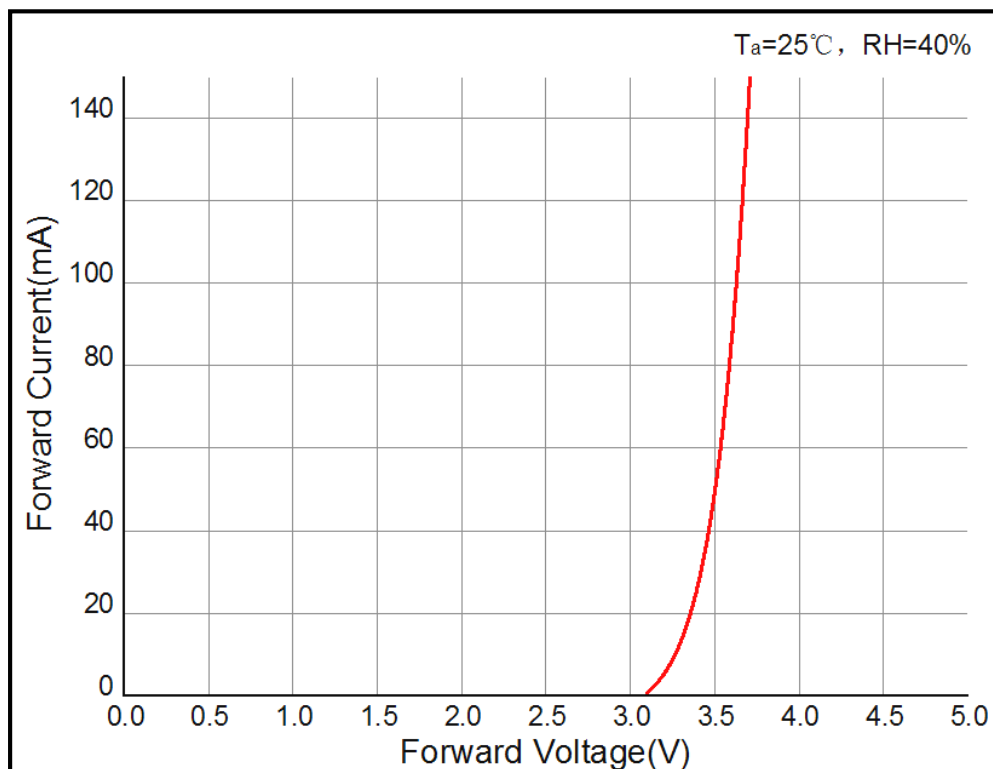


### 3. Relative Radiation Flux vs Forward Current

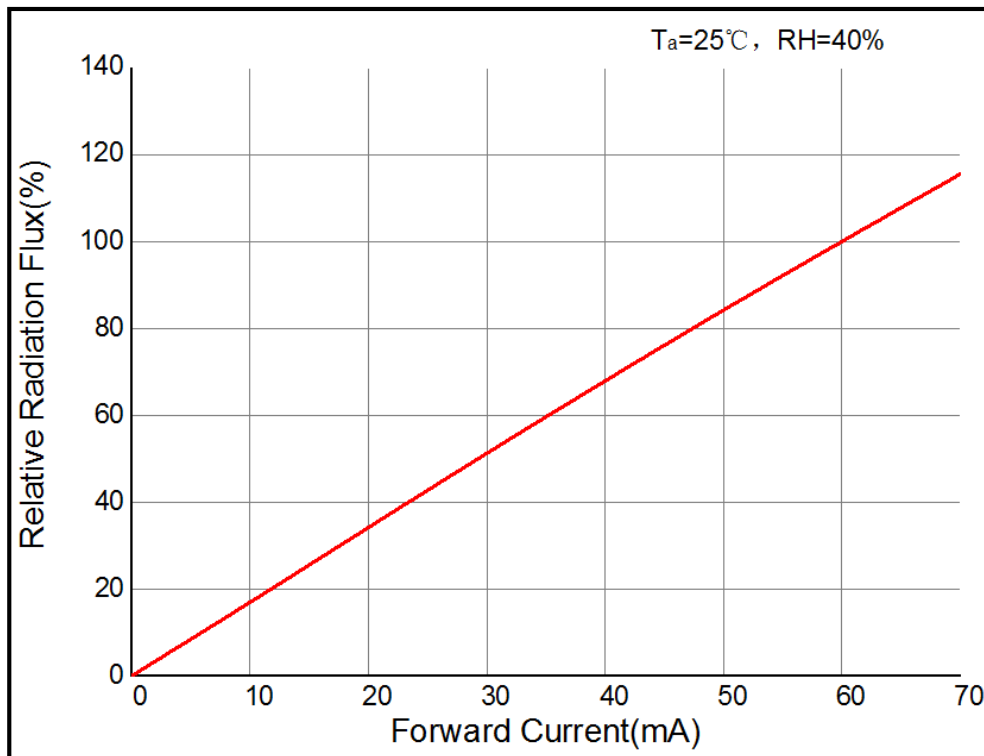


### 4. Peak Wavelength vs Forward Current

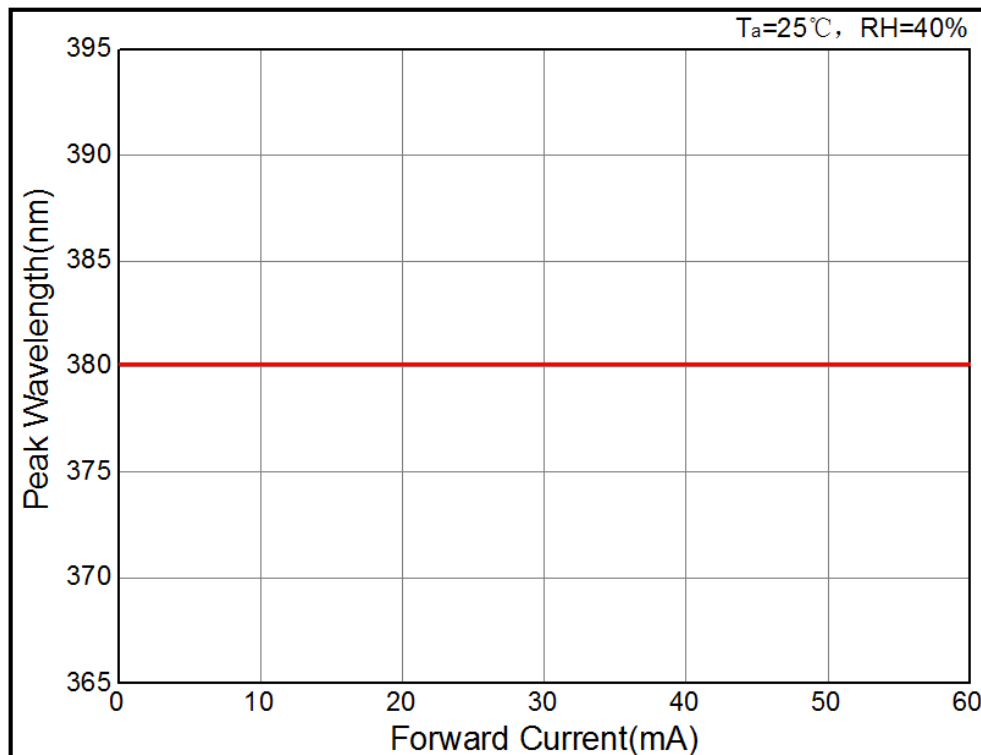


### 5. Spectrum Half-Wave Width vs Forward Current

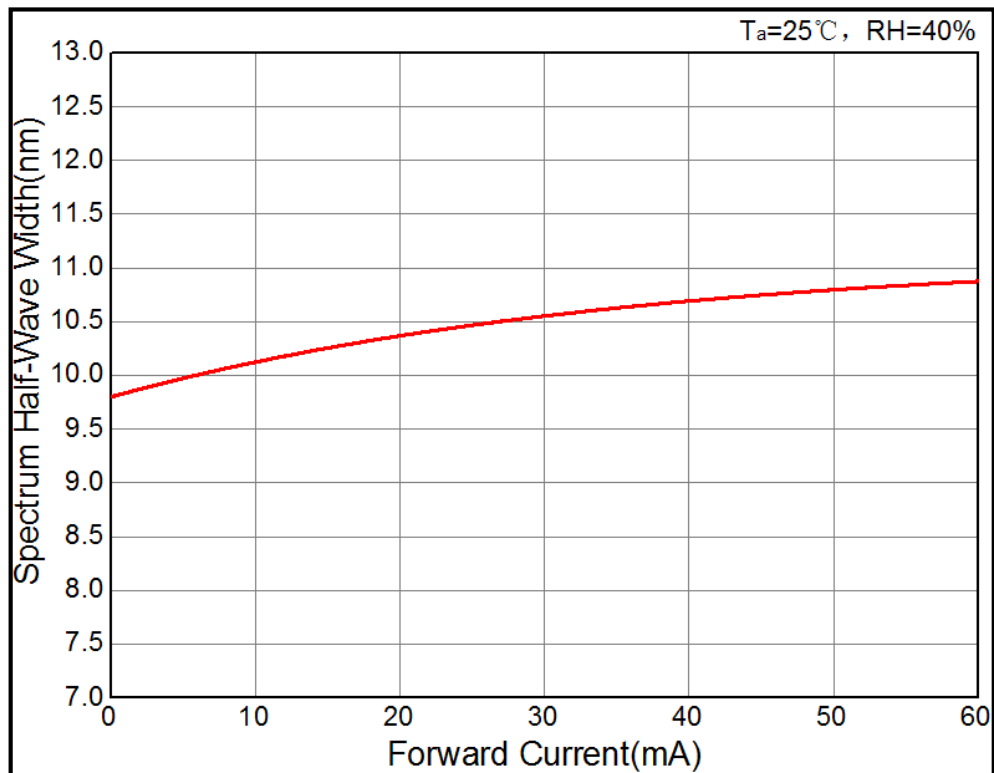


### 6. Spatial Distribution Graph

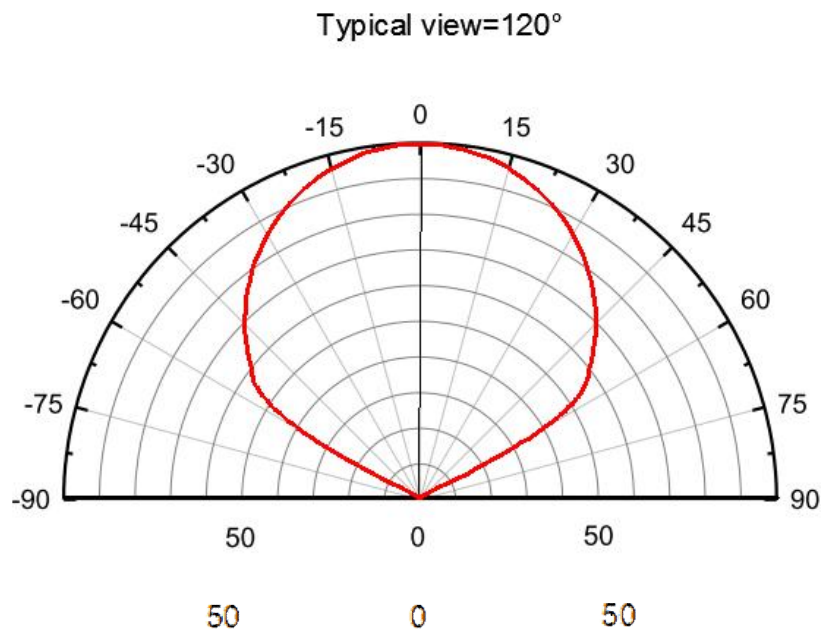

## Product Application Information

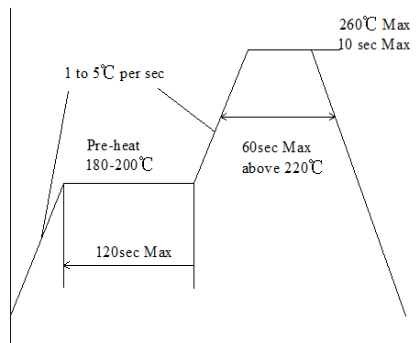

**Recommended Reflow Soldering Condition**  
(Lead-free solder)

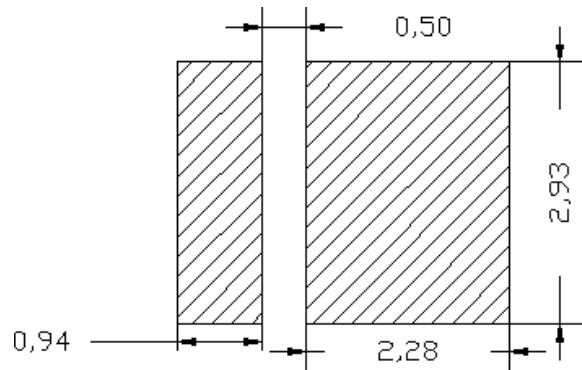

**Recommended Soldering pad Layout**  
(Unit: mm)

### Notes:

- \*This LED is designed to be reflow soldered on to a PCB. If dip soldered or hand soldered, Bytech cannot guarantee its reliability.
- \*Reflow soldering must not be performed more than twice.
- \*Avoid rapid cooling. Ramp down the temperature gradually from the peak temperature.
- \*Nitrogen reflow soldering is recommended. Air flow soldering conditions can cause optical degradation, caused by heat and/or atmosphere.
- \*Since the silicone used in the encapsulating resin is soft, do not press on the encapsulant resin. pressure can cause nicks, chip-outs, encapsulant delamination and deformation, and wire breaks, decreasing reliability.
- \*Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- \*The Die Heat Sink should be soldered to customer PCB. If it is difficult or impossible, use high heat-dissipating adhesive.
- \*When soldering, do not apply stress to the LED while the LED is hot.
- \*When using a pick and place machine, choose an appropriate nozzle for this product.
- \*When flux is used, it should be a halogen free flux. Ensure that the manufacturing process is not designed in a manner Where the flux will come in contact with the LEDs.
- \*Make sure that there are no issues with the type and amount of solder that is being used.

## CAUTIONS

### 1. Handling Precautions

- Do not handle the LEDs with bare hands as it will contaminate the LEDs surface and may affect the optical characteristics.
- When handling the product with tweezers, be careful not to apply excessive force to the resin. Otherwise, The resin can be cut, chipped, delaminate or deformed, causing wire-bond breaks and catastrophic failures.
- Dropping the product may cause damage.

### 2. Electrostatic Discharge (ESD)

- The product are sensitive to static electricity or surge voltage. ESD can damage a die and its reliability. When handling the products, the following measure against electrostatic discharge are strongly recommended:

Eliminating wrist strap, ESD footwear, clothes, and floors

Grounded workstation equipment and tools

ESD table/shelf mat made of conductive materials

- Ensure that tools, jigs and machines that are being used are properly grounded and that proper grounding techniques are used in work areas. For devices/equipment that mount the LEDs, protection against surge voltages should also be used.

- The customer is advised to check if the LEDs are damage by ESD

When performing the characteristics inspection of the LEDs in the application.

Damage can be detected with a forward voltage measurement at low current( $\leq 1$ mA).

### 3. Eye Safety

- Please proceed with caution when handling any UVLEDs driven at low or high current. Since UV light can be harmful to eyes, do Not look directly into the UV light, even through an optical instrument.
- UV protective glasses are required to use in order to avoid damage by UV light in case of viewing UV light directly.





## History of Revision

[illegible]