


## Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan,  $\geq 50000$  hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;

## Size

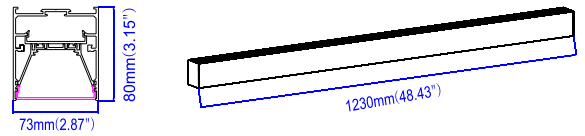




## Parameter

Size	1230mm(4.04ft)X73mm(0.24ft)X80mm(0.26ft)
Beam angle	96°(PDM)
Working voltage	100~277VAC /50~60Hz
PF	$\geq 0.9$
Input power	34W ( 8.5W/ft )
CCT	3000K/4000K/6000K ( 3500K 、 5000K)
CRI	80+/90+
Lumen	3345~3465lm(836~866lm/ft)
Energy efficiency	A+
Dimming range	1~100%
Operating temperature	-20°C~+45°C
Storage temperature	-40°C~+60°C
Humidity	40~75% RH
IP grade	IP40
Installation way	Surface installation
Package size	1280mm(4.20ft)X130mm(0.43ft)X126mm(0.41ft)
Gross Weight	4.48Kg


## Standard color



## Test report

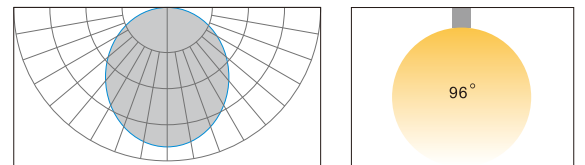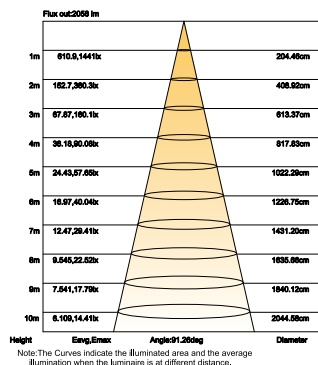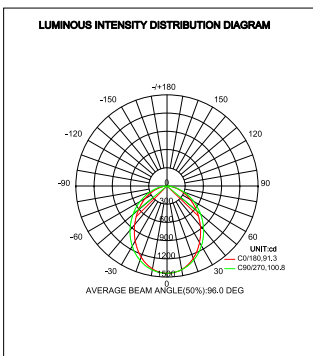

PDM

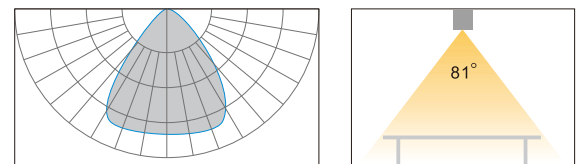


UGR < 19

## Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance  $\pm 10\%$ ;

## Optional accessories

### Installation accessories



• Pendant



L-PTB




L-PT




L-PTB-NPF




L-PTB-PF



• Ceiling mounted



L-SM



• Wall mounted



L457-WM

L-PTB: pendant wires with canopy

L-PT :pendant wires without canopy


L-PTB-NPF: pendant wire + canopy without cable hole

L-PTB-PF: pendant wire + canopy with cable hole

L-SM: screw for ceiling mounted

L457-WM: wall mounted clip

### Disassembly tool

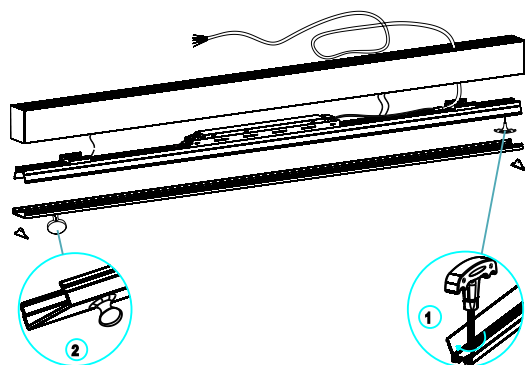

L-DA-D



L-DA-A

• Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker