


Features

- Double-color silicone extrusion+flexible FPC+highlight LED
- **Super long connection, same brightness from front to the tail.**
- Anti UV
- Flexible
- Mild and even light output
- High waterproof grade
- **Cuttable + Non-soldering terminal + silicone plug**
- Hollow inside, protect LEDs well
- Warranty time \geq 3 years

Dimension

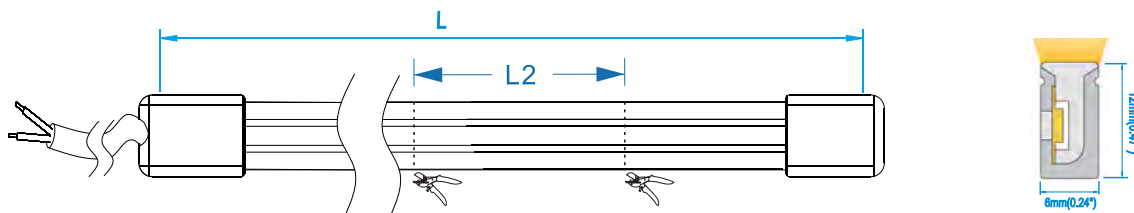

Parameter

Light transmittance	37%
Beam angle	115°
Anti-UV grade	UVA-340
Material	Silicone
IP grade	Ip67
Weight/meter	162g
Operating Temperature	-20°C~+45°C
Storage temperature	-20°C~+60°C




BV standard product

Help to set up an energy conservation, flexible and multifunctional lighting effect, the product is with features of good heat radiation, anti-yellowing, strong weather resistance and easy installation.




Parameter

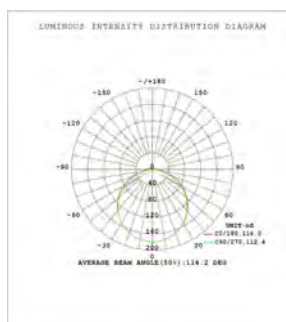


Topic	Monochrome			
	2700K	3000K	4000K	6000K
CCT/Brightness	279lm/m (85lm/ft)	299lm/m (91lm/ft)	305lm/m (93lm/ft)	301lm/m (92lm/ft)
CRI	80+/90+			
Current	0.3A/m (0.09A/ft)			
Input voltage	24Vdc			
Cut length	L2=50mm/unit (0.164ft/unit)			
Length / reel	L=20M(65.6ft)			
Power	7.2W/m (2.2W/ft)			

Bending Diagram

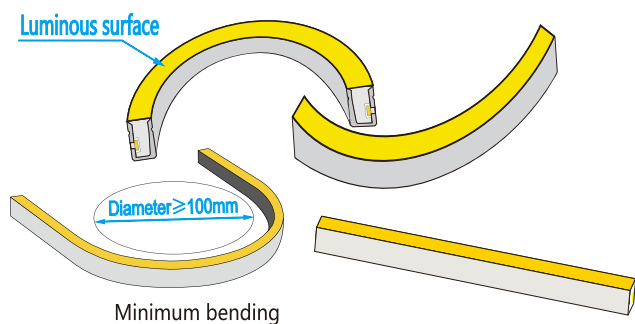

Correct bending direction and bending radius

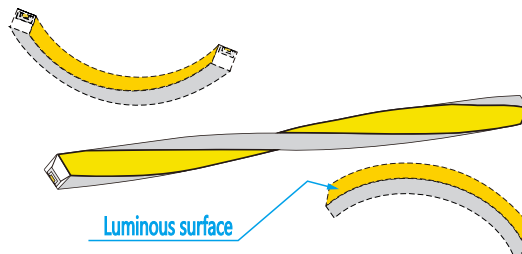

Do not twist it or bending reversely

Optional accessories



- Silicone end cap for straight through cable




- Silicone end cap for side through cable



- Silicone end cap for back through cable




- Silicone tail end cap

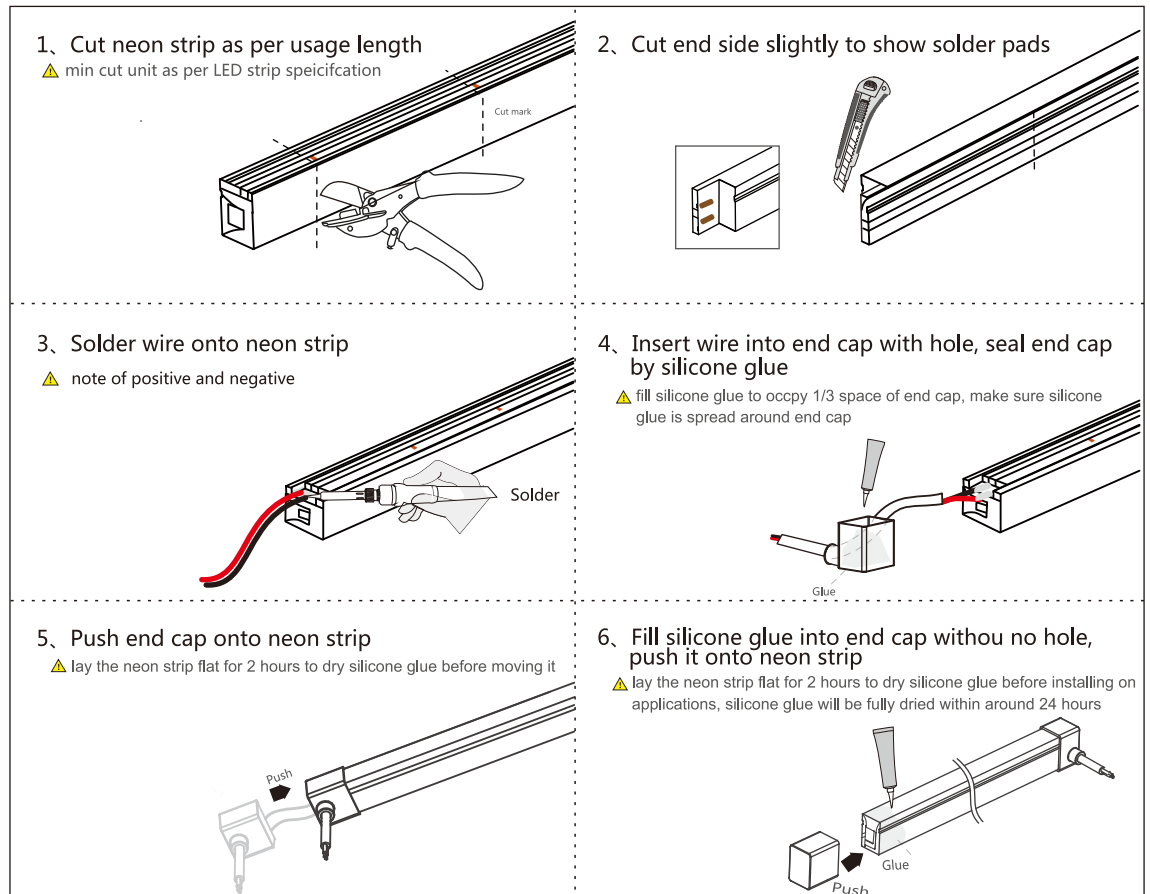


Installation accessories



- Installation with clip



- Installation with alu profile

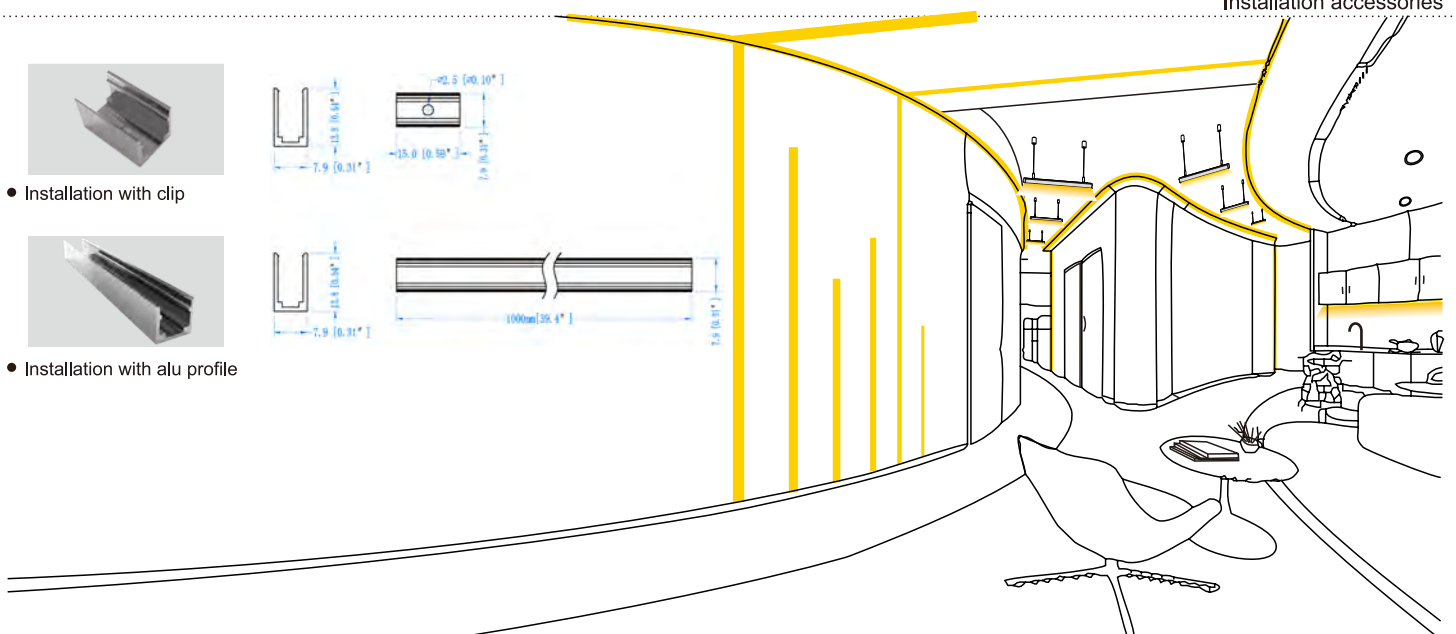


Optional accessories


Tool



- Special cutter


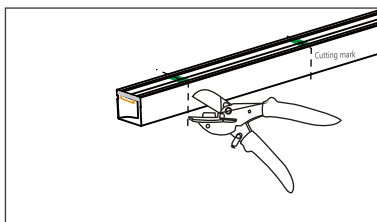


correct cutting way

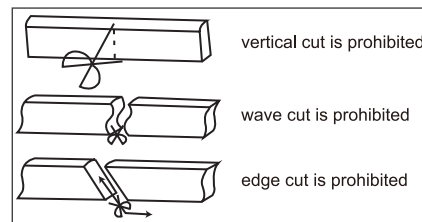

wrong cutting way



Package

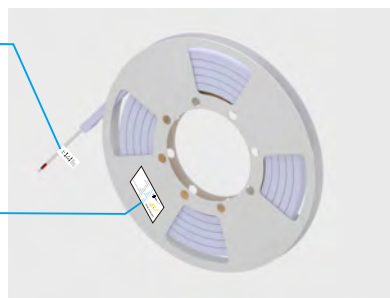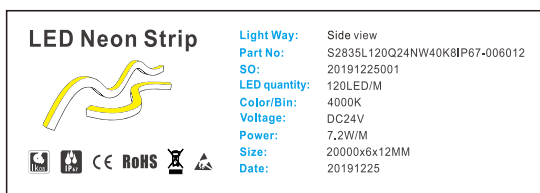

5M=381mm × 29mm

20M=381mm × 88mm

- Reel

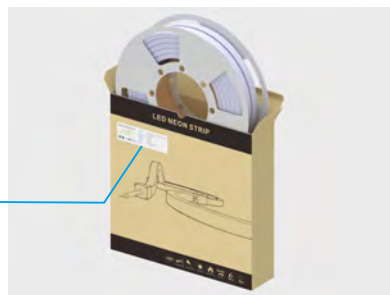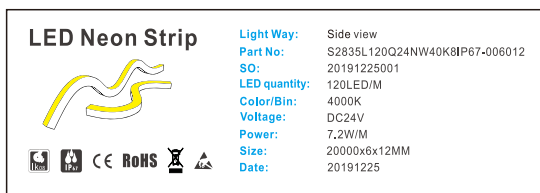

5M=29mm × 3 reels

20M=88mm × 1 reel

- Inner box



3 boxes



410*410*260mm

- Packing