


Features


- Dual-color silicone extrusion+flexible FPC+highlight LED
- UV resistance
- Flexible
- Mild and even light output
- High waterproof grade
- **Cuttable + Non-soldering terminal**
- Hollow inside, protect LEDs well
- Warranty time ≥ 3 years
- **Not be restricted by cutting unit, could cut it at any length without dark zone**
- Emitting 360°, widely use for artistic lighting space to bring more vivid designs

Dimension

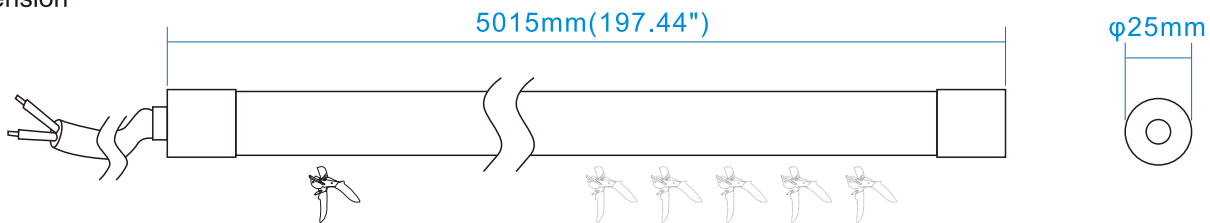


Parameter

Light transmittance	73%
Beam angle	360°
Anti-UV grade	UVA-340
Material	Silicone
IP grade	Silicone end cap IP67 / Metal end cap IP20
Weight/meter	530g
Operating Temperature	-20℃~+45℃
Storage temperature	-20℃~+60℃
Min Cut	Casual cutting / free cutting





BV casual cut neon light

Release from restriction of cutting unit, can cut it at anywhere to keep even lighting output, helps users to satisfy their origin design desires but do not compromise to restriction of cutting lengths.

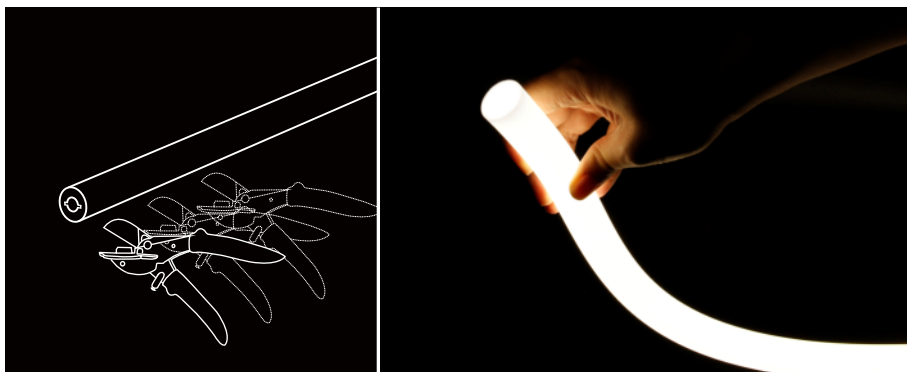


Parameter




Topic	Monochrome			
	2700K	3000K	4000K	6000K
CCT/Brightness	1695lm/m (516lm/ft)	1824lm/m (555lm/ft)	1920lm/m (585lm/ft)	1872lm/m (570lm/ft)
CRI	80+/90+			
Current	0.8A/m (0.244A/ft)			
Input voltage	24Vdc			
Length / reel	L=5M(16.4ft)			
Power	19.2W/m (5.85W/ft)			

Note: lumen data were from CRI>80, lumen output of CRI>90 is lower around 15%, lumen output of CRI>95 is lower around 25%.

Bending Diagram

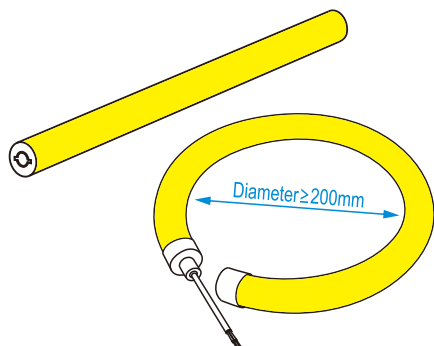


Correct bending direction and bending radius

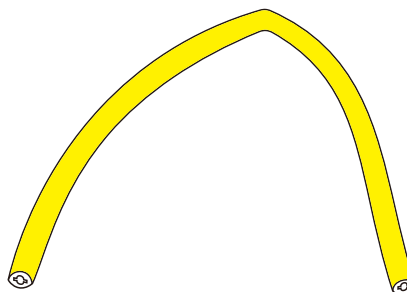


Do not twist it or bending reversely

Installation accessories


Horizontal ceiling mounted

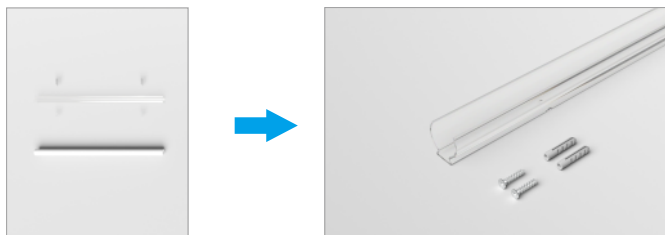


Pendant by pendant wires

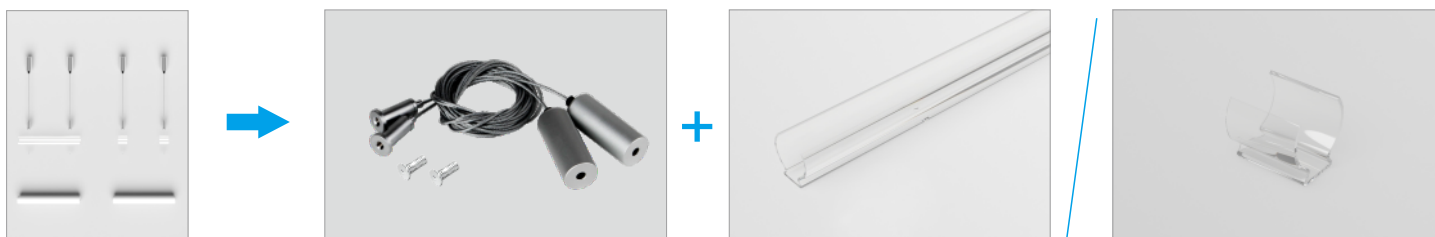

Horizontal pendant by pendant pole

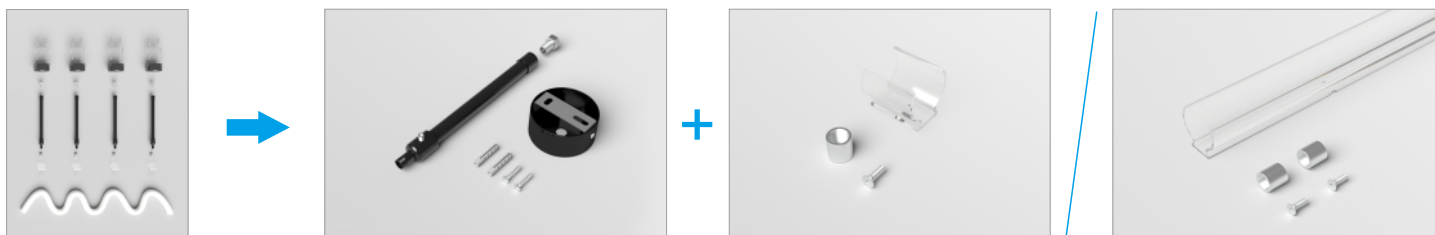


Vertical pendant by pendant pole

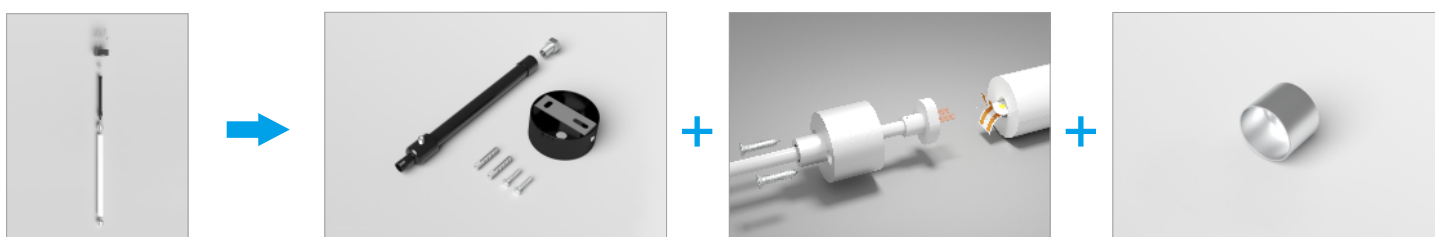


Vertical ceiling mounted




Driver box + pendant pole

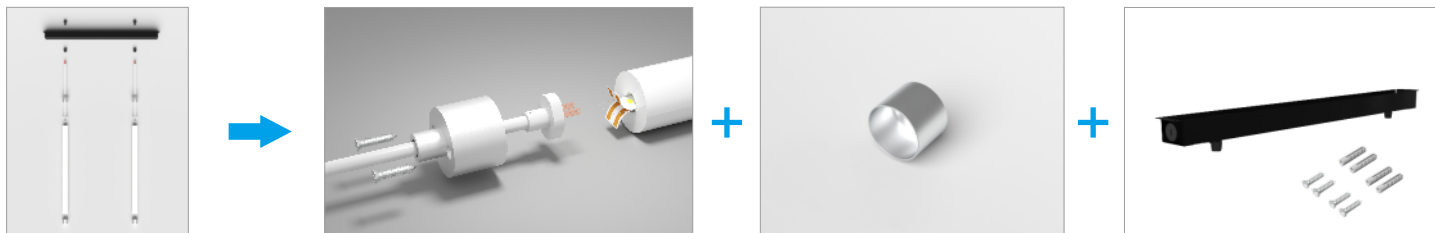

O shape pendant

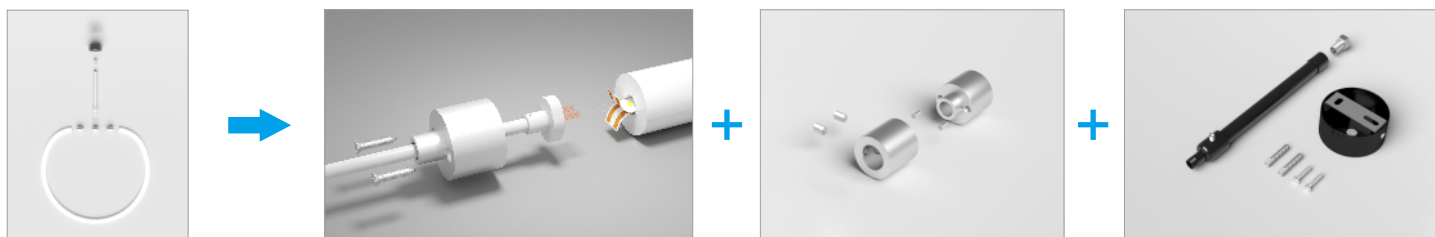

U shape ceiling mounted

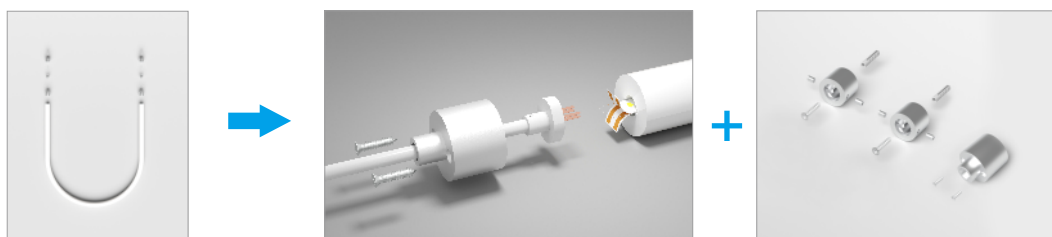


Optional accessories

Tool



- Special scissors

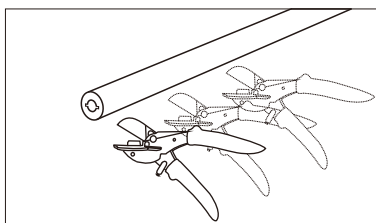

- Correct cutting way


Package



LED Neon Strip

Light Way: 360°
Part No: S2835L120Q24NW40K8IP67-NW-D25D
SO: 20210426001
LED quantity: 240LED/M
Color/Bin: 4000K
Voltage: DC24V
Power: 19.2W/M
Size: 5000x25x25MM
Date: 20210426

CE RoHS

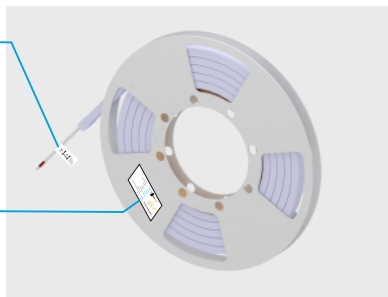


5Mx2pcs=381mm x 88mm

• Reel

LED Neon Strip

Light Way: 360°
Part No: S2835L120Q24NW40K8IP67-NW-D25D
SO: 20210426001
LED quantity: 240LED/M
Color/Bin: 4000K
Voltage: DC24V
Power: 19.2W/M
Size: 5000x25x25MM
Date: 20210426

CE RoHS

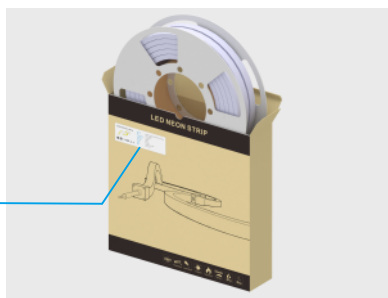

5Mx2pcs=88mm x 1 reels

• Inner box



3 boxes



• Packing