


Features


- Double-color silicone extrusion+flexible FPC+highlight LED
- High light transmittance
- Anti UV
- Flexible
- Mild and even light output
- High waterproof grade
- Cuttable
- Hollow inside, protect LEDs well
- Working time $\geq 50000\text{H}$

Waterproof

IP67
Silicone extrusion,
empty inside
Wet location
short time under water



Dimension

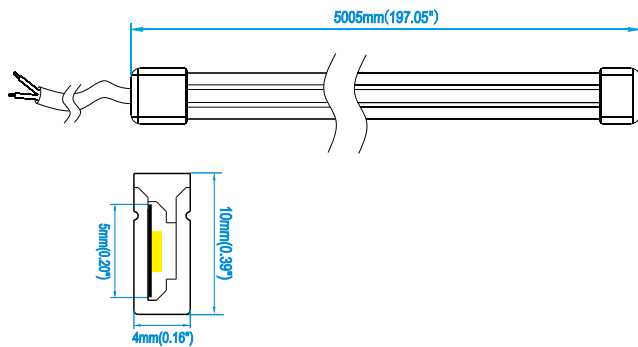



BV standard product

Help to set up an energy conservation, flexible and multifunctional lighting effect the products with features of good heat radiation, anti-yellowing, strong weather resistance and easy installation.


Parameter

Light transmittance	29%
Beam angle	115°
Anti-UV grade	UVA-340
Material	Silicone
Weight/meter	156 g
IP grade	Ip67
Operating Temperature	-20°C ~ +45°C
Storage temperature	0°C ~ +60°C
LED strip options	S2216L120-5mm S3528L120-5mm
Parameter	Refer to specification of LED strip


Test report

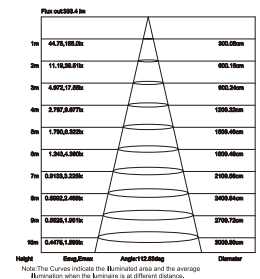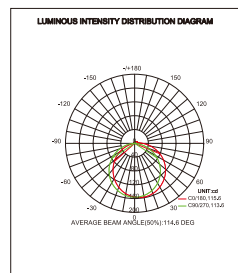

Installation

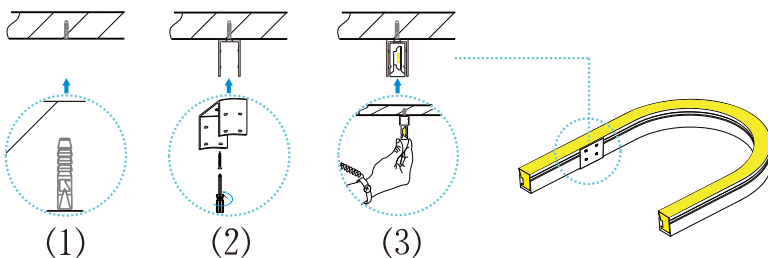

Bending neon strip correctly, fix clip on the surface of application, 2pcs/m, and fix one more clip on turning place
Bending angle $\geq 20\text{mm}$

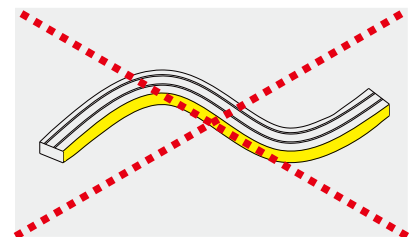

Wrong bending