


Features


- Double-color silicone extrusion+flexible FPC+highlight LED
- High light transmittance
- Anti UV
- Flexible
- Mild and even light output
- High waterproof grade
- Cuttable
- Hollow inside, protect LEDs well
- Working time $\geq 50000\text{H}$

Waterproof

IP67
Silicone extrusion,
empty inside
Wet location
short time under water



Dimension

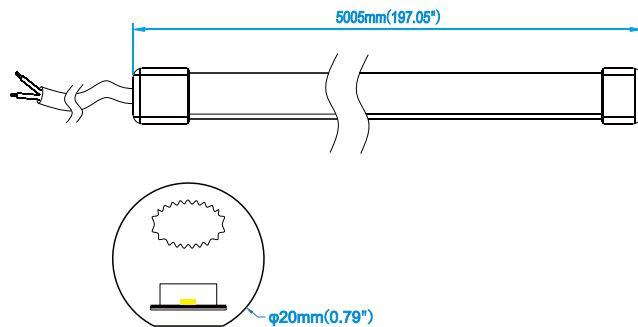



BV standard product

Help to set up an energy conservation, flexible and multifunctional lighting effect the products with features of good heat radiation, anti-yellowing, strong weather resistance and easy installation.


Parameter

Light transmittance	73%
Beam angle	270°
Anti-UV grade	UVA-340
Material	Silicone
Weight/meter	285 g
IP grade	Ip67
Operating Temperature	-20°C ~ +45°C
Storage temperature	0°C ~ +60°C
LED strip options	S2835L112-10mm S2835L160-10mm S2835L140-10mm
Parameter	Refer to specification of LED strip

Test report

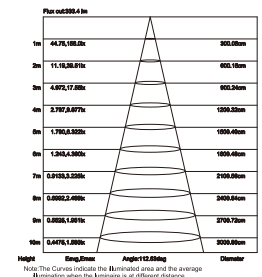

Installation

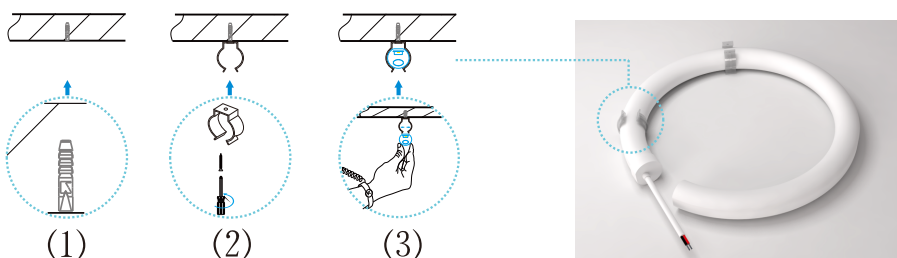

Bending neon strip correctly, fix clip on the surface of application, 2pcs/m, and fix one more clip on turning place
Bending angle $\geq 100\text{mm}$