


Features

- Aluminum 6063, good heat radiation with long lifespan;
- Support 0~10V, PWM and Resistor dimming solution;
- High lighting efficiency, save energy;
- Long lifespan, ≥ 50000 hours;
- Light source adopts LM-80 certified LED;
- Adopt UL Class P certified power supply;

Parameter

| | |
|-----------------------|-----------------------------------------------------------------------------------------------------------|
| Size | 1230mm(4.04ft)X55mm(0.18ft)X80mm(0.26ft) |
| Beam angle | 96°(PDM) |
| Working voltage | 100~277VAC /50~60Hz |
| PF | ≥ 0.9 |
| Input power | total : 44W(11W/ft) up : 18W(4.5W/ft) down : 27W(6.7W/ft) |
| CCT | 3000K/4000K/6000K (3500K , 5000K) |
| CRI | 80+/90+ |
| Lumen | total : 4200~4455lm(1050~1113lm/ft) up : 1680~1780lm(420~445lm/ft) down : 2520~2675lm(630~668lm/ft) |
| Energy efficiency | A+ |
| Dimming range | 1~100% |
| Operating temperature | -20°C~+45°C |
| Storage temperature | -40°C~+60°C |
| Humidity | 40~75% RH |
| IP grade | IP40 |
| Installation way | Pendant, wall mounted |
| Package size | 1280mm(4.20ft)X115mm(0.38ft)X92mm(0.3ft) |
| Gross Weight | 3.99Kg |




Size

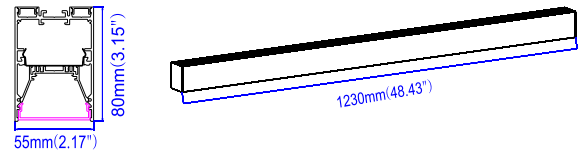



Standard color




Test report

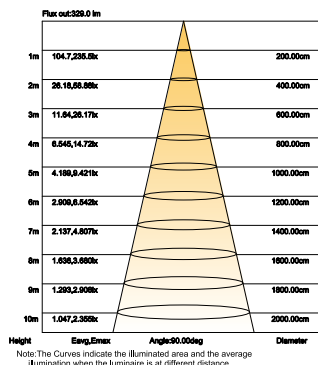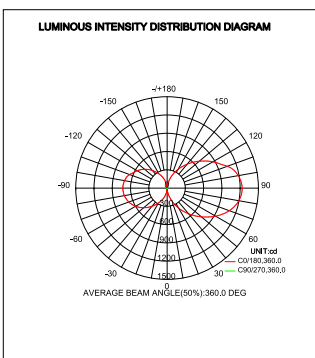

PDM



UGR<19




Remark:

- Output data is from test result of 4ft PDM linear light fixture;
- Tolerance $\pm 10\%$;

Optional accessories

Installation accessories



- Pendant



L-PTB-S



L-PT-S



L-PTB-NPF-S



L-PTB-PF-S



- Wall mounted



L5580D-WM

L-PTB-S: pendant wires with canopy


L-PT-S :pendant wires without canopy

L-PTB-NPF-S: pendant wire + canopy without cable hole

L-PTB-PF-S: pendant wire + canopy with cable hole

L5580D-WM: wall mounted clip

Disassembly tool

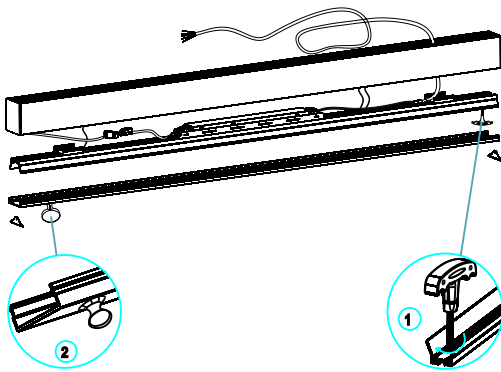

L-DA-D



L-DA-A

- Tool

L-DA-D: disassembly tool

L-DA-A: Rubber sucker