



IEC 1500V  
UL 1500V



UL94-V0



-40°C~90°C




IP 68

## H6 U Series Crystal Harness



H6 3U

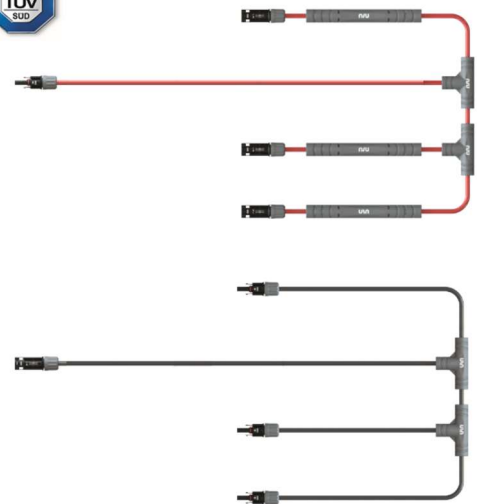

### Options

- Available in 2 or 3 strings configurations
- 4mm<sup>2</sup>~16mm<sup>2</sup>/ 12AWG~6AWG Available
- All Certified PV Connectors and Cables Available
- Standard Fuse Size up to 50A
- Resistance welded joints
- UV Resistant

### Product Overview

NIU Power H6 U Branch Harness use high quality materials that guarantee long-term reliability. H6 Branch Harness have IP68 water-proof rating and can be used in a wide operating temperature range from -40 °C to 90 °C. NIU Power H6 U Series Branch Harness reduces the specialized labor required in your installation, making the integration of solar panels a breeze. With harnesses custom manufactured for your specific site, both labor and material costs are significantly reduced. The simplified design and robust construction also increases reliability, making the Interconnect System a perfect solution for any project.

### Technical Data

Rated Voltage	IEC 1500V \ UL1500V
Junction Rated Current	20A(12AWG) \ 45A (10AGW) \ 65A(8AWG) \ 70A(6AWG)
Max Input Rated Current Protection(A6 Max)	Max 32A
Max Input Rated Current Protection(A6 B Max)	Max 50A
Ambient temperature	-40°C up to +90°C
Contact Resistance	≤0.05mΩ
Pollution Degree	Class II
Protection Degree	Class II
Fire Resistance	UL94-V0
Rated Impulse Voltage	16KV
Locking System	NEC Locking Type

### Order Data

Part No.	Cable Spec	Fuse	Connector
H6 2U-a	Input: 2x4mm <sup>2</sup> : Output: 1x10mm <sup>2</sup>	2x Max 50A	Option: solar connectors Option: Input and Output Cables
H6 2U-b	Input: 2x6mm <sup>2</sup> : Output: 1x16mm <sup>2</sup>		
H6 3U-a	Input: 3x4mm <sup>2</sup> : Output: 1x16mm <sup>2</sup>	3x Max 32A	

Remark: Plastic over-mold material is suitable for outdoor use with respect to exposure to UV light, water exposure and immersion in accordance with UL 746A,746B and746C.Harness design and specification subject to change or modification without notice.

