

A6 Max Series Inline Fuse

光伏保险丝连接器: A6 Max 系列



DC 1500V



Max 32A



1~3ms



UL94-V0



IP 68



UV Resistance




Product Overview 产品概述:

A6 Max Fuse connectors use high quality weather resistance materials that guarantee long-term reliability. It could be installed on site. A6 Max Fuse connectors could match 4 mm² to 10mm² cables, it could be widely used in different applications. The lower contact resistance and higher current transfer capability ensure high product efficiency. A6 Max Fuse Connectors have IP68 water-proof rating and can be used in a wide operating temperature range.

A6 Max 系列光伏保险丝连接器采用高品质绝缘耐候材料, 可保障产品在户外长期安全使用。在安装现场可实现快速安装。产品可适配 4 平方到 16 平方线缆, 具有更广的应用范围。较小的接触电阻和更大电流传输能力保障了产品长期使用的可靠性。产品符合 IP68 额定标准。



Temperature Detating Curve 温度降额曲线

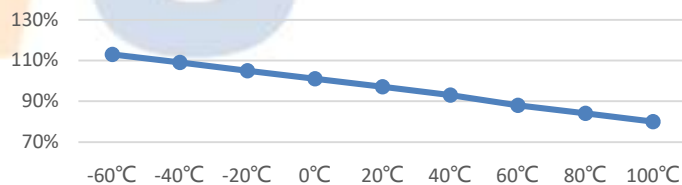

Technical Data 技术参数:

Rated Voltage 额定电压	IEC1500V/UL1500V
Rated Current 额定电流	1~32A
Rated Breaking Capacity 额定分断电流	30KA@1500V
Time Constant 时间常数	1-3ms
Pollution Degree 污染等级	Class II
Protection Degree 保护等级	Class II
Fire Resistance 阻燃等级	UL94-V0
Rated Impulse Voltage 额定浪涌电压	16KV
Locking System 锁扣	NEC Locking Type


* Customized options available, for more information, please contact us: marketing@niu-power.com




A6 Max Series Inline Fuse

光伏保险丝连接器: A6 Max 系列


FM

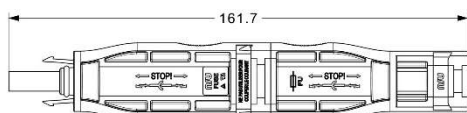


CM

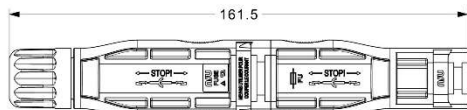

CF

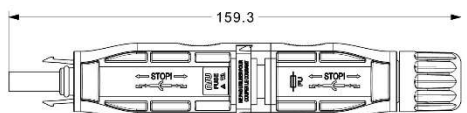

CC

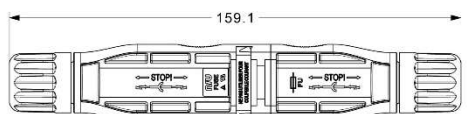

DC 1500V



Max 32A



1~3ms



UL94-V0




IP 68



UV Resistance



Temperature Detating Curve 温度降额曲线

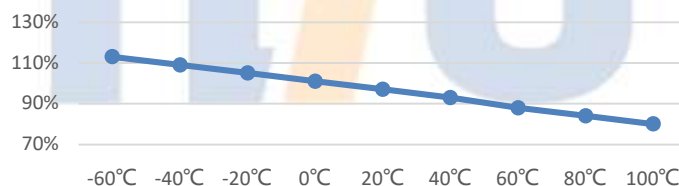

Order Data 规格信息:

A6-C	Structure	Voltage	FUSE Current	Cable OD	Variations
Solar DC Fuse Connector	<input type="checkbox"/> FM: Female Plus Male	<input type="checkbox"/> IEC1500V	<input type="checkbox"/> 01: 1A	<input type="checkbox"/> 01: 2.5mm ²	<input type="checkbox"/> _____
	<input type="checkbox"/> CM: Cable Pus Male	<input type="checkbox"/> UL1500V	<input type="checkbox"/> 02: 2A	<input type="checkbox"/> 02: 4mm ²	
	<input type="checkbox"/> CF: Cable Pus Female	<input type="checkbox"/> _____	<input type="checkbox"/> XX: XX A	<input type="checkbox"/> 03: 6mm ²	
	<input type="checkbox"/> CC: Cable Pus Cable			<input type="checkbox"/> 04: 10mm ²	
				<input type="checkbox"/> _____	

* Customized options available, for more information, please contact us: marketing@niu-power.com

Package Info 包装信息:

Carton Dimension (cm)	Pack list	QTY
59cm X 39cm X 18cm	A6 Max CC	100 pcs
Remark: 100 pcs in one carton package		

