No	Description	Note	Date	Rev
1	First release	Charles	2021.11.25	A1





E8-M(B)





E8-M(O/R)

E8 MALE CONNECTOR

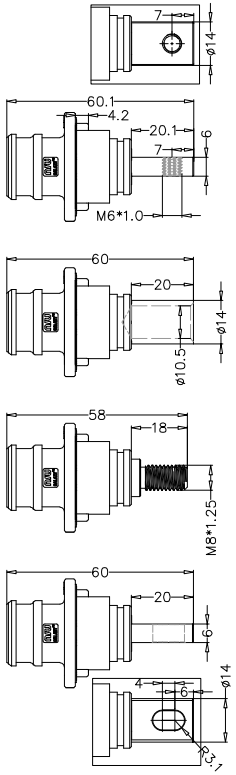

E8-M(B/O/R)-M6-(0/1/2)

E8-M(B/O/R)-35/50/70-(0/1/2)

E8-M(B/O/R)-T-(0/1/2)



E8-M(B/O/R)-B-(0/1/2)





E8 FEMALE 90° SHAPE CONNECTOR





E8 FEMALE 180° SHAPE CONNECTOR

E8-M(B/O/R)-(B/T/M6/35/50/70)-(0/1/2)

- B:BLACK
- O:ORANGE
- R:Red
- B:Busbar
- T:Threaded
- M6:M6x1.0
- 35:35mm²crimp
- 50:50mm²crimp
- 70:70mm²crimp
- 0: Blank No Keyway
- 1: 30 °
- 2: 45 °

E8-F(I / L)-(B/O/R)-(35/50/70)-(0/1/2)

- I:180° SHAPE
- L:90° SHAPE
- B:BLACK
- O:ORANGE
- R:Red
- 35:35mm²crimp
- 50:50mm²crimp
- 70:70mm²crimp
- 0: Blank No Keyway
- 1: 30 °
- 2: 45 °

NOTE:

1.Specification subject to change without notice.
2.Tolerance ± 1mm
3.Proper Installation and fixation are required to prevent stress due to cable bending or hanging which will cause quality and electrical hazard Issue.
4.Operation temperature:-40℃～+125℃
5.Get more information for www.niu-power.com or marketing@niu-power.com

NIU POWER CORPORATION
TECHNICAL CENTER APPROVED
TECHNICAL SUPPORT
MARKETING@NIU-POWER.COM
WWW.NIU-POWER.COM

NIU POWER

DRAWN: CHARLES	PART NO. N10408
CHECKED BINGO	TITLE: E8 Series
APPROVED YB	

SHEET	UNIT	SCALE	SIZE	REV
1/1	mm	*	A4	A1