

M810 Active/Passive Monitor



Application

Live performance stage monitoring Speech reinforcement.Reinforcement of vocal and aco-ustic music.High-performance satellite speaker for use with subwoofers.

The M810 is a world-class professional stage monitor. A 90° x 60° horn provides smooth, even coverage whether the performer is standing right on the speaker or moving upstage. Bi-amp or full-range passive operation may be selected when ordering.


The M810 can also do double duty as a utility speaker. For use on a tripod or over a subwoofer.

Key Features

World-Class stage monitor. Compact and low-profile for minimal obstruction of audience sight-lines.

90° x 60° nominal coverage. Full-range passive operation or Bi-amped(Request when order). 35mm pole socket for applications requiring tripod mounting. 1.4"(diaphragm) magnet compression driver.


Dimensions

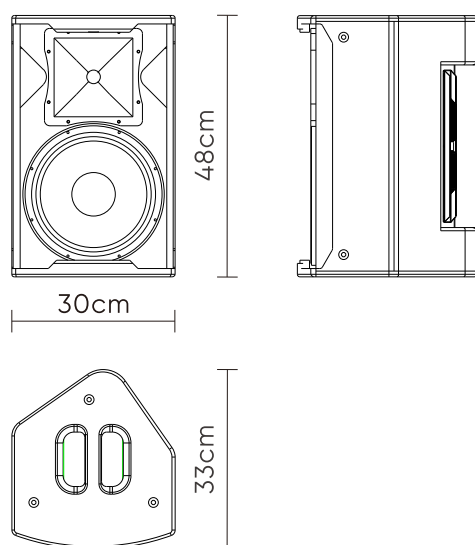

Specifications

Model	M810
Driver (inch)	LF:1x10" HF:1x1.4"
DC-Impedance	9.6 Ohm
Freq.Response (Hz/-6dB)	60-22k
Power Consumption (W)	250
Peak Voltage (Vp)	100
Peak Current (Ap)	10
Peak Power (W)	1000
Sensitivity (dB/m.w)	98
Maximum SPL (dB)	127
Coverage (H°xV°)	90x60
Dimensions (cm)	30x48x33
N.W.(kg)	14

Freq·Response

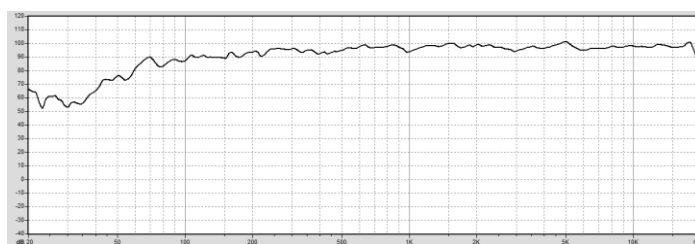

M812 Active/Passive Monitor



Application

Live performance stage monitoring Speech reinforcement.Reinforcement of vocal and acoustic music High-performance satellite speaker for use with subwoofers.

The M812 is a world-class professional stage monitor. A 90° x 60° horn provides smooth, even coverage whether the performer is standing right on the speaker or moving upstage. Bi-amp or full-range passive operation may be selected when ordering.


The M812 can also do double duty as a utility speaker. For use on a tripod or over a subwoofer.

Key Features

World-Class stage monitor.Compact and low-profile for minimal obstruction of audience sight-lines.

90° x 60° nominal coverage.Full-range passive operation or Bi-amped(Request when order). 35mm pole socket for applications requiring tripod mounting.1.8" (diaphragm) magnet compression driver.


Dimensions

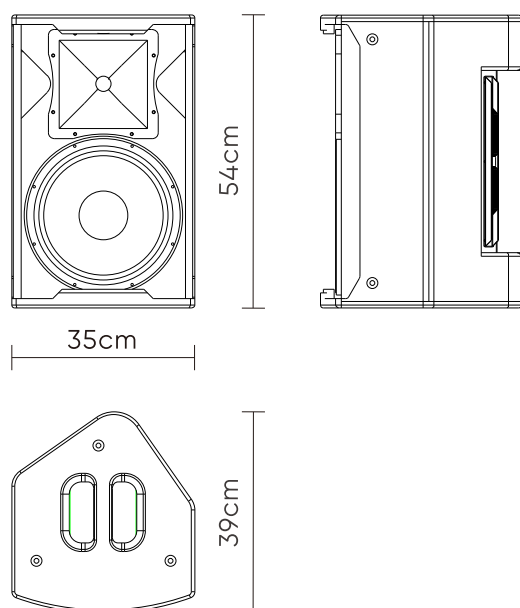

Specifications

Model	M812
Driver (inch)	LF:1x12" HF:1x1.8"
DC-Impedance	6.4 Ohm
Freq.Response (Hz/-6dB)	55-20k
Power Consumption (W)	300
Peak Voltage (Vp)	100
Peak Current (Ap)	15
Peak Power (W)	1200
Sensitivity (dB/m.w)	99
Maximum SPL (dB)	129
Coverage (H°xV°)	90x60
Dimensions (cm)	35x54x39
N.W.(kg)	18

Freq·Response

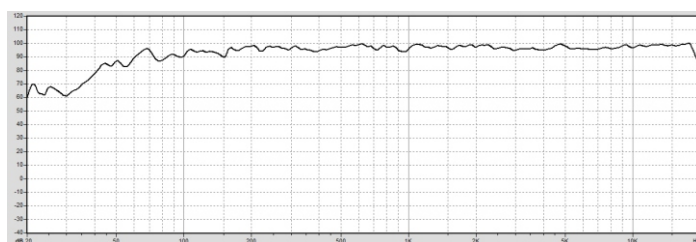

M815 Active/Passive Monitor



Application

Live performance stage monitoring Speech reinforcement.Reinforcement of vocal and aco-ustic music High-performance satellite speaker for use with subwoofers.

The M815 is a world-class professional stage monitor.A 90° x 60° horn provides smooth, even coverage whether the performer is standing right on the speaker or moving upstage.Bi-amp or full-range passive operation may be selected when ordering.


The M815 can also do double duty as a utility speaker. For use on a tripod or over a subwoofer.

Key Features

World-Class stage monitor.Compact and low-profile for minimal obstruction of audience sight-lines.

90° x 60° nominal coverage.Full-range passive operation or Bi-amped(Request when order). 35mm pole socket for applications requiring tripod mounting.1.8" (diaphragm) magnet compression driver.

Dimensions

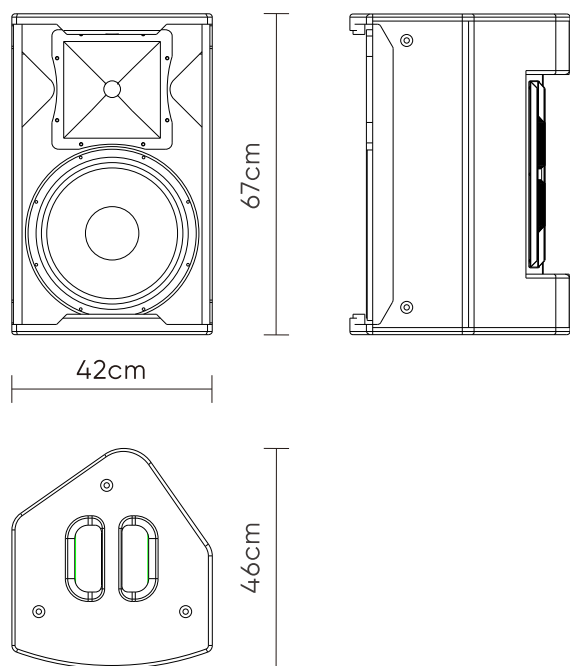

Specifications

Model	M815
Driver (inch)	LF:1x15" HF:1x1.8"
DC-Impedance	4.8 Ohm
Freq.Response (Hz/-6dB)	50-20k
Power Consumption (W)	400
Peak Voltage (Vp)	100
Peak Current (Ap)	20
Peak Power (W)	1600
Sensitivity (dB/m.w)	100
Maximum SPL (dB)	132
Coverage (H°xV°)	90x60
Dimensions (cm)	42x67x46
N.W.(kg)	25

Freq·Response

