

# ATENIC

## TOBILED

### 2024



No.5 building, Qingwan industrial zone, Sanzao Town, Jinwan District, Zhuhai City, Guangdong province, China, 519040

Contact No.: 0086-756-6805251/6805252/6805253/6805254/  
6805465/6805310;

Email: info@tobiled.com www.tobiled.com Fax: 0086-756-6805559

TOBILED CO., LIMITED ALL rights reserved.  
Designs and specifications may change without prior notice.



## LED PROFILE

珠海拓比光科技有限公司，自2008年成立以来，始终专注于LED照明灯具的设计与制造。拥有自主研发实力和现代化厂房，占地逾6000平方米，现有员工约90-100人。公司创始人来自德国，坚持德国工匠精神，确保产品按照德国标准设计与生产，实现品质与技术的国际领先水平。

公司已通过ISO认证9001:2015、UL、ETL和CETL等多项国际认证，所有产品均符合欧盟RoHS环保标准，品质可靠。公司的产品销售遍布全球各地，深受用户和市场认可。

我们秉承品质、服务、专业与创新的核心价值观，致力于开发高品质、高性能的LED照明灯具，满足客户需求。公司高度关注环保及员工职业安全健康，定期向政府报告污水排放状况，组织安全生产培训，确保达标。

珠海拓比光科技有限公司将以科技创新为驱动，持续提升产品品质和市场竞争力，为客户提供个性化的ODM与OEM服务，致力成为LED照明灯具行业的优秀企业。


**TOBILED** TOBILED was founded in 2008 and located in Zhuhai City, with a factory area of more than 6,000m<sup>2</sup> and 90-100 employees. It is a company specializing in the design and manufacture of LED lighting fixtures. The company owner is German, all products are produced with the EU RoHS directive standards. We have obtained certification of S09001:2015, UL, ETL and CETL. Our products sell to all over the world. Environmental protection, occupational safety and health are our main focus and responsibility. TOBILED reports sewage discharge to government every year and arranges safety production training to ensure our employees safety and health, also reduces our discharge to non-toxic, non-pollution to the environment as social liability.



GO-2000 GONIOPHOTOMETER



HAAS-1200 Accurate spectroradiometer

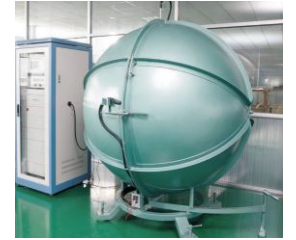


**LED strip**  
灯带




Flexible LED Strip 8

**IP64 LED Profile**  
防水型材



WP08AL1 12




WP06AL1 13

**Asymmetric LED Profile**  
偏光型材




TP03A 70° 38




AP4501 39


**LED Profile 8-30mm width**  
8-30mm 型材




AP4105 14




AP4101 15




AP3401 16




AP4106 17




AP3413 18




AP3412 19




AP4103 20




AP3410 21




AP4104 22




AP3411 23




AP3402 24




AP3403 25



AP0101 26




AP11 27




AP21 28


**LED Profile with beam angle**  
小角度型材




AP4102 40



AP0705 41



AP0702 42




AP0701 43




AP0703 44

**Wardrobe LED Profile**  
衣杆灯型材




CP02(AP3701) 45




CP03(AP3702) 46



AP27 47




AP2701 48




AP13 49


**Recessed LED Profile**  
嵌入式型材




AP0202 30



AP32 31




AP3404 32




AP12 33

**Skirting Board LED Profile**  
踢脚线型材




DP13 50




DP03(AP3603) 51

**Step light LED Profile**  
台阶灯型材




DP01(AP4301) 52


**Corner LED Profile**  
45度角型材




AP0302 34



AP0303 35




DP14 36




AP1303 37


**Plaster construction LED Profile**  
预埋式型材




DP06(AP3301) 53




DP07(AP3304) 54



DP10(AP3305) 55




DP08(AP1201) 56




DP11(AP3601) 57


LED Profile with 35-100 mm width  
35-100mm 型材




OP3503 58




OP3504 59




OP3502 60




OP3506 61




OP04 (AP2402) 62




OP03 (AP2401) 63




OP07 (AP1901) 64



OP08 (AP1902) 65




OP01 (AP3801) 66




OP02 (AP3802) 67


PC Cover  
PC灯罩




PC11-7 16




PC14-10 45



PC12-11 53




AP3413-13-5 18




AP4105-8 14




PC32-9 15




PC03-15 46




AP4103-18 20




PC04-24 35




PC33-35 61




AP4104-27 22



AP3412-14 19




PC18-50 65




PC20-35 59




PC07-13 47




PC19-D50 64



PC09-D16 48




PC15-D60 66




PC16-D100 67


PMMA Cover  
PMMA灯罩




PA21-16 23




PA01-9 15




PA02-15 26




PA04-24 28




PA10-43 63




PAB06-9 40




PAB05-15 42




PAB02-15 42



PA05-20F 21



PAB04-16 39










PA09-18 55







**Features:**

1. 3step LED, CRI>82, CRI>90, 95 are available on request. We are using 20Z copper for our PCB.
2. Standard length: 5m/Reel
3. With 3M double tape on the bottom
4. Working Temperature: 0-40°C
5. IP Rate Available: IP20, IP65/67/68
6. Operating Voltage: DC 12V/24. 48V is available on request.
7. Warranty: 5years for IP20, 3years for IP65/ IP67/IP68
8. To avoid LED dots, we suggest to use LED strip which minimum 120pcs LED per meter.
9. LED strip which is  $\geq 15W/M$  we suggest to use with cooling plate.

Part No	Color	LED (SMD)	Cutting Length	Pcb Width	Length	LED Q'ty	Max. Power	Lm/NM
	CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	6mm	1000mm	120leds/m 600leds/5m	20W/m 100W/5m	105-110lm/W
	CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	8mm	1000mm	120leds/m 600leds/5m	20W/m 100W/5m	105-110lm/W
	CW/NW/WW	3step 2835LED	24V(50mm,7pcs)	8mm	1000mm	140leds/m 700leds/5m	20W/m 100W/5m	130lm/W
	CW/NW/WW	3step 3528LED	12V(12.5mm,3pcs)	8mm	1000mm	240leds/m 1200leds/5m	17W/m 85W/5m	105-110lm/W
	CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	10mm	1000mm	120leds/m 600leds/5m	25W/m 125W/5m	105-110lm/W

Part No	Color	LED (SMD)	Cutting Length	Pcb Width	Length	LED Q'ty	Max. Power	Lm/NM
	CW/NW/WW	3step 2835LED	24V(25mm,6pcs)	12mm	1000mm	240leds/m 1200leds/5m	50W/m 250W/5m	105-110lm/W
	CW/NW/WW	3step 2835LED	24V(50mm,12pcs)	15mm	1000mm	240leds/m 1200leds/5m	50W/m 250W/5m	105-110lm/W
	CW/NW/WW	3step 2835LED	24V(50mm,14pcs)	16mm	1000mm	280leds/m 1400leds/5m	50W/m 250W/5m	125-130lm/W
	CW/NW/WW	3step 3014LED	24V(50mm,6pcs)	3mm	1000mm	120leds/m 600leds/5m	10W/m 50W/5m	\
	CW/WW tunable white	3step 3014LED	24V(50mm,12pcs)	8mm	1000mm	240leds/m 1200leds/5m	10W/m 50W/5m	90-105lm/W
	CW/NW/WW	3step 2016LED	24V(20mm,6pcs)	7mm	1000mm	300leds/m 1500leds/5m	40W/m 200W/5m	105-110 lm/W
	CW/NW/WW	3step 2016LED	24V(20mm,6pcs)	8mm	1000mm	300leds/m 1500leds/5m	40W/m 200W/5m	105-110lm/W



Part No	Color	LED (SMD)	Cutting Length	Pcb Width	Length	LED Q'ty	Max. Power	Lm/NM
	RGBWW	5060RGB 2835LED	24V(166.67mm,18pcs)	12mm	1000mm	108leds/m 540leds/5m	20W/m 100W/5m	\
	RGB	5060LED	24V(71.4mm,6pcs)	10mm	1000mm	84leds/m 420leds/5m	20W/m 100W/5m	\
	RGB	5060LED	24V(50MM,6PCS)	10mm	1000mm	120leds/m 600leds/5m	25W/m 125W/5m	\
	RGB + W (CW/NW/WW)	5060LED	24V(50mm,6pcs)	12mm	1000mm	120led/m 600led/5m	30W/m 150W/5m	\
	RGB+CW+WW	5060LED	24V(62.5mm,6pcs)	12mm	1000mm	96leds/m 480leds/5m	40W/m 200W/5m	\
<b>DMX Control LED strip DMX 控制灯条 (有流水, 追逐效果)</b>								
	DMX RGBW	5060LED	24V(83.33mm,7pcs)	12mm	1000mm	84leds/m 420leds/5m	20W/m 100W/5m	\
	DMX RGB	5060LED	24V(71.4mm,6pcs)	10mm	1000mm	84leds/m 420leds/5m	20W/m 100W/5m	\
	DMX CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	10mm	1000mm	120leds/m 600leds/5m	28W/m 140W/5m	90-95lm/W

**LED Strip--Waterproof Version \* Maximum length: 10meter**





Waterproof A (IP54):  
Full silicone tube



Waterproof B (IP68):  
Half PU tube + PU gel filling



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.060.0001 (1m)	铝槽外壳 Aluminum profile		1.16.060.0008 (1M)	亚克力型材 PMMA profile	
1.05.060.0002 (2m)			1.16.060.0007 (2M)		
1.05.060.0003 (3m)			1.16.060.0003 (3.02M)		

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.025.0002 (1M)	铝槽外壳 Aluminum profile		1.16.025.0070 (1M)	亚克力型材 PMMA profile	
1.05.025.0003 (2M)			1.16.025.0070 (3.02M)		
1.05.025.0001 (3M)					
1.01.07.0058  1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip				

Dimensions: W5\*H15.4\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 5W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP64  
 Working Temperature:-40°C~+45  
 Net weight:117g/meter

尺寸: W5\*H15.4\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:5W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线


线长: 200mm  
 防水等级: IP64  
 工作温度:-40°C~+45  
 净重: 117g/meter




Dimensions: W13\*H16.3\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle: 170°  
 Wiring come out: from the end  
 from bottom





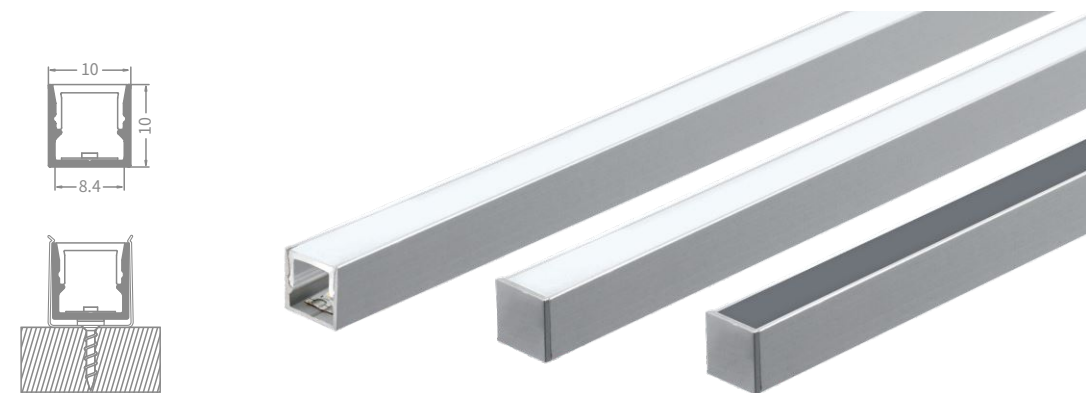

Cable length: 200mm  
 IP rating: IP64  
 Working Temperature:-40°C~+45  
 Net weight:270g/meter

尺寸: W13\*H16.3\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 170°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP64  
 工作温度:-40°C~+45  
 净重:270g/meter



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.041.0018 (3.02m)	铝槽外壳 Aluminum profile		1.04.02.41.0006 (3.02m)	AP4105-8 PC 灯罩 PC milky cover	
1.02.04.41.0007	塑胶堵头 Plastic end cap				

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.041.0001 (1m) 1.05.041.0002 (2m)	铝槽外壳 Aluminum profile		1.02.04.41.0003 (with hole silver) 1.02.04.41.0004 (w/o hole silver)	塑胶堵头 Plastic end cap	
1.04.03.41.0003 (1m) 1.04.03.41.0004 (2m) 1.04.03.41.0002 (3m)	PA01-9 亚克力磨砂灯罩 PMMA frosted cover		1.04.02.41.0003 (1m) 1.04.02.41.0002 (2m) 1.04.02.41.0001 (3.02m)	PC32-9 PC 灯罩 PC milky cover	
1.04.03.41.0018 (2m)	PA01-9B 亚克力黑色灯罩 Black PMMA cover		1.01.07.0064 1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

Dimensions: W8\*H6\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 180pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 59g/meter

尺寸: W8\*H6\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 180pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:59g/meter

Dimensions: W10\*H10\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 100g/meter

尺寸: W10\*H10\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:100g/meter



AP3401 Mini LED Profile




编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0001 (1m) 1.05.034.0002 (2m)	铝槽外壳 Aluminum profile		1.02.04.34.0004 (with hole silver) 1.02.04.34.0003 (w/o hole silver)	塑胶堵头 Plastic end cap	
1.04.02.34.0001 (1m) 1.04.02.34.0002 (2m) 1.04.02.34.0005 (3m)	PC11-7 PC 灯罩 PC milky cover		1.01.07.0036  1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

Dimensions: W9\*H15.7\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 163g/meter

尺寸: W9\*H15.7\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:163g/meter

AP4106-NEW Mini LED Profile

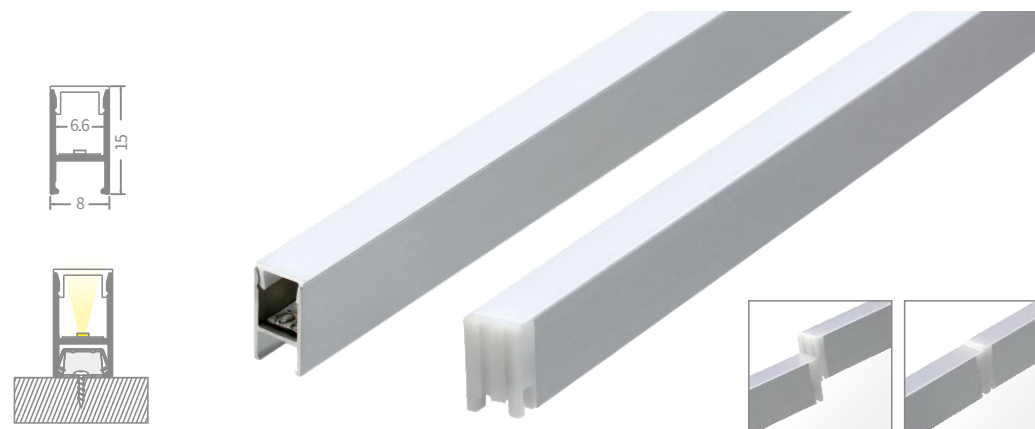


编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.041.0020 (3.02m)	铝槽外壳 Aluminum profile		1.01.07.0089  1.01.05.0233 (M2.6*12mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.02.41.0006 (3.02m)	AP4105-8 PC 灯罩 PC cover		1.02.04.41.0008	塑胶堵头 Plastic end cap	

Dimensions: W8\*H15\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 93g/meter

尺寸: W8\*H15\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:93g/meter

AP3413-NEW LED Profile

AP3412-NEW LED Profile

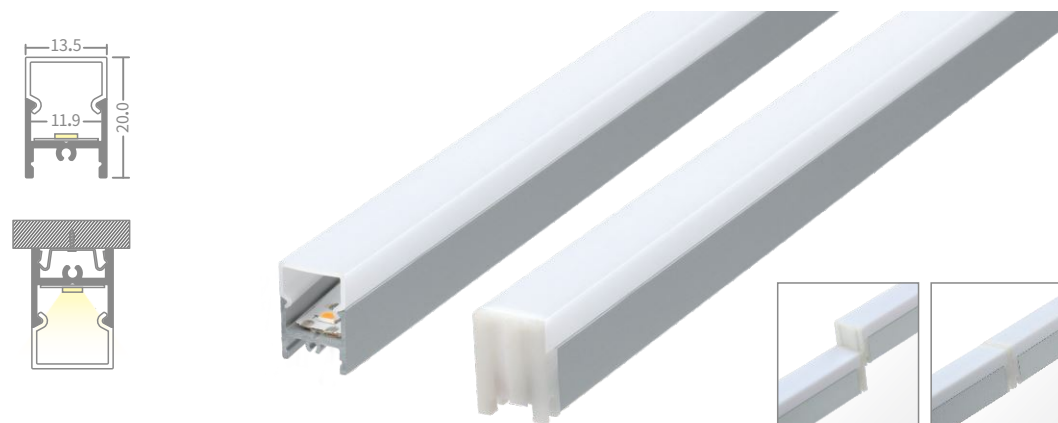

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0092 (1M) 1.05.034.0093 (2M) 1.05.034.0094 (3M)	铝槽外壳 Aluminum profile		1.01.07.0085  1.01.05.0233 (M2.6*12mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.02.500.0008 (1M) 1.04.02.500.0009 (2M) 1.04.02.500.0010 (3M)	AP3413-13.5 PC 灯罩 PC milky cover		1.02.04.34.0046	塑胶堵头 Plastic end cap	

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0089 (1M) 1.05.034.0090 (2M) 1.05.034.0091 (3M)	铝槽外壳 Aluminum profile		1.01.07.0085  1.01.05.0233 (M2*8mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.02.34.0033 (1M) 1.04.02.34.0034 (2M) 1.04.02.34.0035 (3M)	AP3412-14 PC 灯罩 PC milky cover		1.02.04.34.0048	塑胶堵头 Plastic end cap	

Dimensions: W13.5\*H20\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 177g/meter

尺寸: W13.5\*H20\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:177g/meter


Dimensions: W13.5\*H20\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 135°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 162g/meter

尺寸: W13.5\*H20\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 135°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:162g/meter

AP4103-NEW LED Profile

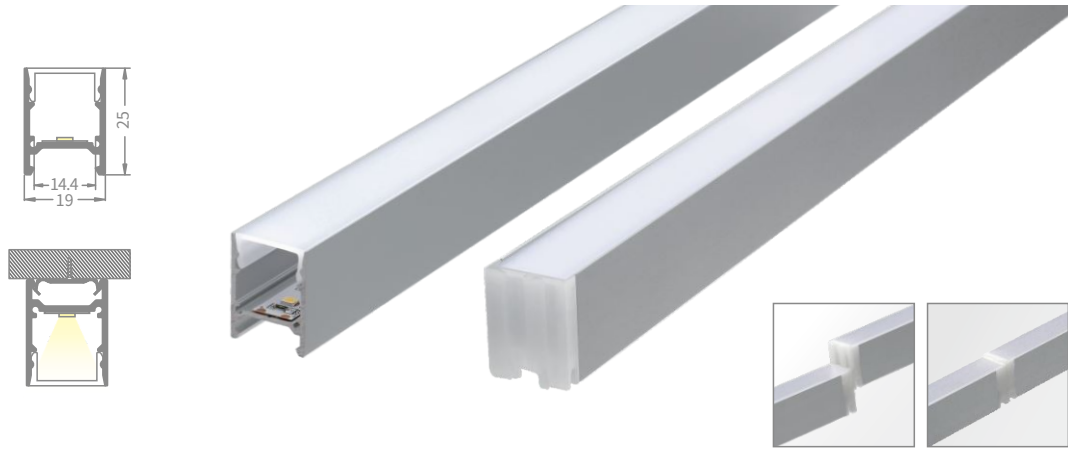

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.041.0017 (3.02m)	铝槽外壳 Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.02.41.0004 (3.02m)	AP4103-18 PC 灯罩 PC milky cover		1.02.04.41.0009	塑胶堵头 Plastic end cap	

Dimensions: W19\*H25\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 15W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 293g/meter

尺寸: W19\*H25\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:15W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:293g/meter

AP3410-NEW LED Profile





NOT FOR AUSTRALIA  
 AND NEW ZEALAND MARKET!

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0083 (1M) 1.05.034.0084 (2M) 1.05.034.0085 (3M)	Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.50.0001 (1M) 1.04.03.50.0002 (2M) 1.04.03.50.0003 (3M)	PA05-20F PMMA 灯罩 PMMA frosted surface		1.02.04.34.0047 1.01.05.0218 (M3*3mm)	塑胶堵头 Plastic end cap	

Dimensions: W19.5\*H25\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 15W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle: 135°  
 Wiring come out: from the end  
 from bottom  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 266g/meter

尺寸: W19.5\*H25\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:15W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度: 135°  
 出线方式: 尾部出线  
 底部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:266g/meter

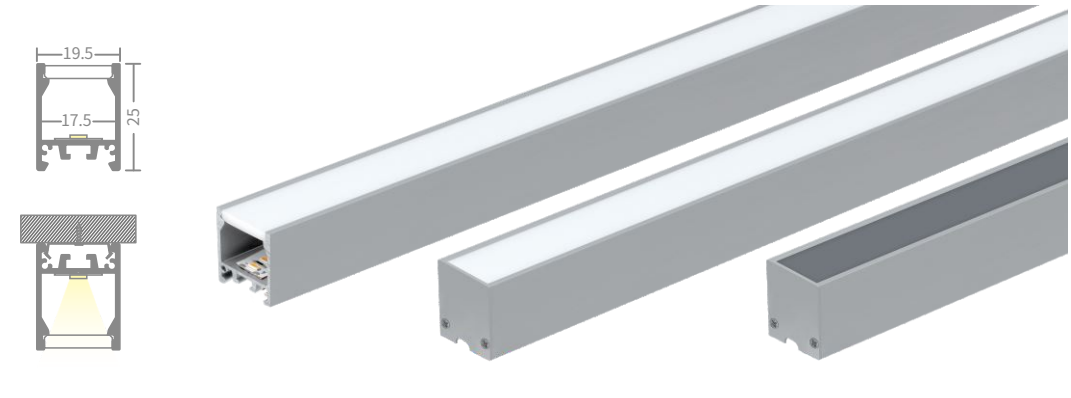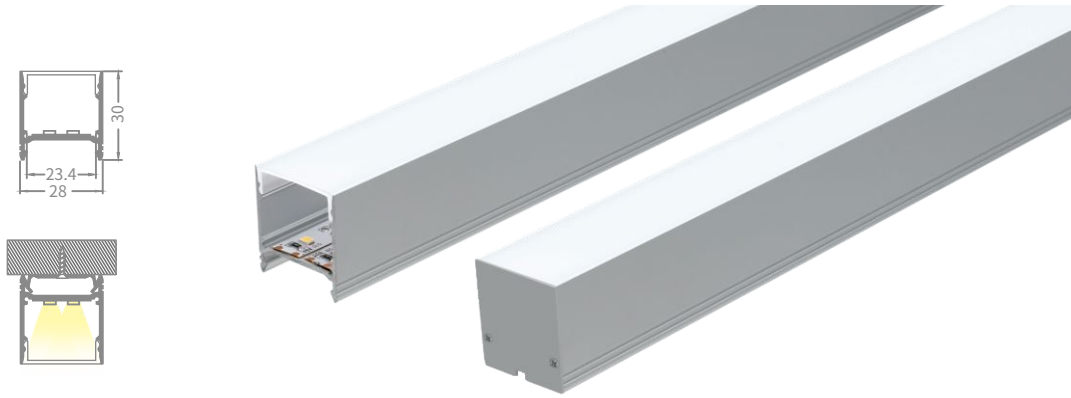

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.041.0019 (3.02m)	铝槽外壳 Aluminum profile		1.01.07.0088 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.02.41.0007 (2.5m) 1.04.02.41.0005 (3.02m)	AP4104-27 PC 灯罩 PC milky cover		1.01.04.41.0002 1.01.05.0258 (M2*8mm)	铝堵头 Aluminum end cap Self-tapping screws	





编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0086 (1M) 1.05.034.0087 (2M) 1.05.034.0088 (3M)	铝槽外壳 Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.34.0002 (1m) 1.04.03.34.0003 (2m)	PA21-16 亚克力磨砂灯罩 PMMA frosted cover		1.01.04.34.0031 1.01.05.0162 (M2*8mm)	铝堵头 Aluminum end cap Self-tapping screws	
1.04.03.34.0019 (2m)	PA21-16B 黑色亚克力磨砂灯罩 Black PMMA cover				

Dimensions: W28\*H30\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 25W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight: 384g/meter

尺寸: W28\*H30\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:25W/meter  
 灯珠数量: 240pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:384g/meter

Dimensions: W19.5\*H25\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net weight:348g/meter

尺寸: W19.5\*H25\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率:20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:348g/meter



NOT FOR AUSTRALIA  
AND NEW ZEALAND MARKET!

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0039 (1m) 1.05.034.0040 (2m)	铝槽外壳 Aluminum profile		1.02.04.34.0011 (with hole silver) 1.02.04.34.0014 (w/o hole silver) 1.01.05.0310 (M1.8*8mm)	塑胶堵头 Plastic end cap	
1.04.02.34.0014 (1m) 1.04.02.34.0015 (2m)	PC12-11 PC灯罩 PC milky cover		1.01.07.0066  1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0038 (1m) 1.05.034.0034 (2m) 1.05.034.0074 (3m)	铝槽外壳 Aluminum profile		1.02.04.34.0022 (with hole/silver) 1.02.04.34.0021 (w/o hole/silver) 1.01.05.0310 (M1.8*8mm)	塑胶堵头 Plastic end cap	
1.04.03.34.0002 (1m) 1.04.03.34.0003 (2m)	PA21-16 亚克力磨砂灯罩 PMMA frosted cover		1.01.04.34.0021 (with hole/silver) 1.01.04.34.0022 (w/o hole/silver) 1.01.05.0310 (M1.8*8mm)	铝堵头 Aluminum end cap	
1.04.03.34.0019 (2m)	PA21-16B 黑色亚克力磨砂灯罩 Black PMMA cover		1.01.07.0062  1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

Dimensions: W14.5\*H15.7\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 15W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net weight: 250g/meter

尺寸: W14.5\*H15.7\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率:15W/meter  
灯珠数量: 120pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度:-40°C~+45  
净重:250g/meter

Dimensions: W19.5\*H15.7\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 20W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net weight: 264g/meter

尺寸: W19.5\*H15.7\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率:20W/meter  
灯珠数量: 120pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度:-40°C~+45  
净重:264g/meter



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.001.0016 (1m) 1.05.001.0017 (2m) 1.05.001.0018 (3m)	铝槽外壳 Aluminum profile		1.01.07.0001  1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 亚克力磨砂灯罩 PMMA frosted cover		1.01.07.0008  1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.01.0048 (2m)	PA02-15B 亚克力黑色灯罩 Black PMMA cover		1.02.07.0010  1.01.05.0001 (M3*16mm)	连接卡扣 Extension connector	
1.02.04.01.0003 (with hole) 1.02.04.01.0004 (w/o hole)	塑胶堵头 Plastic end cap		1.02.08.0005  1.01.05.0001 (M3*16mm)	90°连接卡扣 90° Extension connector	

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.011.0001 (1m) 1.05.011.0002 (2m) 1.05.011.0003 (3m)	铝槽外壳 Aluminum profile		1.01.07.0001  1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 亚克力磨砂灯罩 PMMA frosted cover		1.01.07.0008  1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.01.0048 (2m)	PA02-15B 亚克力黑色灯罩 Black PMMA cover		1.02.07.0010 (PC)  1.01.05.0001 (M3*16mm)	连接卡扣 Extension connector	
1.02.04.11.0006 (with hole/PC) 1.02.04.11.0005 (w/o hole/PC)	塑胶堵头 Plastic end cap		1.02.04.11.0003 (with hole/PC) 1.02.04.11.0004 (w/o hole/PC)	塑胶堵头 Plastic end cap	

Dimensions: W17.5\*H8\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 15W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:153g/meter

尺寸: W17.5\*H8\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 15W/meter  
灯珠数量: 120pcs LED/m  
颜色 :1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度:-40°C~+45  
净重:153g/meter



Dimensions: W17.5\*H13\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 20W/meter  
LED qty: 120pcs LED/m  
Color Temperature: 1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:215g/meter

尺寸: W17.5\*H13\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 20W/meter  
灯珠数量: 120pcs LED/m  
颜色: 1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度:-40°C~+45  
净重:215g/meter

## AP21 LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.021.0011 (1m) 1.05.021.0012 (2m)	铝槽外壳 Aluminum profile		1.01.04.21.0001 (with hole) 1.01.04.21.0002 (w/o hole) 1.01.05.0162 (M2*8mm)	铝堵头 Aluminum end cap	
1.04.03.12.0003 (1m) 1.04.03.12.0004 (2m)	PA04-24 亚克力磨砂灯罩 PMMA frosted cover		1.01.07.0032 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.12.0025 (2m)	PA04-24B 亚克力黑色灯罩 black PMMA cover				

Dimensions: W26.6\*H15\*L1000mm  
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 25W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI: ra ≥ 80, ra ≥ 90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature: -40°C~+45  
 Net Weight: 287g/meter

尺寸: W26.6\*H15\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 25W/meter  
 灯珠数量: 240pcs LED/m  
 颜色: 1800K-6500K  
 显色: ra ≥ 80, ra ≥ 90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45  
 净重: 287g/meter



## AP0202 Recessed LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.002.0001 (1m) 1.05.002.0002 (2m) 1.05.002.0003 (3m)	铝槽外壳 Aluminum profile		1.01.07.0008 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 亚克力磨砂灯罩 PMMA frosted surface		1.02.04.02.0004 (with hole) 1.02.04.02.0003 (w/o hole)	塑胶堵头 Plastic end cap	
1.04.03.01.0048 (2m)	PA02-15B 亚克力黑色灯罩 Black PMMA cover				

Dimensions: W24.6\*H8.3\*L1000mm  
Customized length is available on request  
Input voltage: 24V DC  
Power: 15W/meter  
LED qty: 120pcs LED/m  
Color Temperature: 1800K-6500K  
CRI:  $r_a \geq 80$ ,  $r_a \geq 90$   
Beamangle: 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature: -40°C~+45  
Net Weight: 210g/meter

尺寸: W24.6\*H8.3\*L1000mm  
可根据客户要求定制不同长度  
输出电压: 24V DC  
功率: 15W/meter  
灯珠数量: 120pcs LED/m  
颜色: 1800K-6500K  
显色:  $r_a \geq 80$ ,  $r_a \geq 90$   
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重: 210g/meter

## AP32 Recessed LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.032.0008 (1m) 1.05.032.0009 (2m)	铝槽外壳 Aluminum profile		1.02.04.32.0001 (with hole silver) 1.02.04.32.0002 (w/o hole silver) 1.01.05.0314 (M1.7*8mm)	塑胶堵头 Plastic end cap	
1.04.02.34.0014 (1m) 1.04.02.34.0015 (2m) 1.04.02.34.0016 (3m)	PC12-11 PC灯罩 PC Surface		1.01.07.0066 1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
			2.02.AP32.001	金属弹簧卡扣 Metal fixing holder	



Dimensions: W21.6\*H15.2\*L1000mm  
Customized length is available on request  
Input voltage: 24V DC  
Power: 15W/meter  
LED qty: 120pcs LED/m  
Color Temperature: 1800K-6500K  
CRI:  $r_a \geq 80$ ,  $r_a \geq 90$   
Beamangle: 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature: -40°C~+45  
Net Weight: 266g/meter

尺寸: W21.6\*H15.2\*L1000mm  
可根据客户要求定制不同长度  
输出电压: 24V DC  
功率: 15W/meter  
灯珠数量: 120pcs LED/m  
颜色: 1800K-6500K  
显色:  $r_a \geq 80$ ,  $r_a \geq 90$   
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重: 266g/meter



## AP3404 Recessed LED Profile



NOT FOR AUSTRALIA  
AND NEW ZEALAND MARKET!

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.034.0047 (1m) 1.05.034.0048 (2m)	铝槽外壳 Aluminum profile		1.02.04.34.0037 (with hole/silver) 1.02.04.34.0038 (w/o hole/silver) 1.01.05.0310 (M1.8*8mm)	塑胶堵头 Plastic end cap	
1.04.03.34.0002 (1m) 1.04.03.34.0003 (2m)	PA21-16 亚克力磨砂灯罩 PMMA frosted surface		2.02.AP3404.001	金属弹簧卡扣 Metal fixing holder	
1.04.03.34.0019 (2m)	PA21-16B 亚克力黑色灯罩 Black PMMA cover		1.01.07.0031 1.01.05.0030 (M3*16mm)	不锈钢卡扣 stainless steel mounting clip	

Dimensions: W30\*H15.7\*L1000mm  
Customized length is available on request  
Input voltage: 24V DC  
Power: 20W/meter  
LED qty: 120pcs LED/m  
Color Temperature: 1800K-6500K  
CRI: ra ≥ 80, ra ≥ 90  
Beamangle: 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature: -40°C~+45  
Net Weight: 346g/meter

尺寸: W30\*H15.7\*L1000mm  
可根据客户要求定制不同长度  
输出电压: 24V DC  
功率: 20W/meter  
灯珠数量: 120pcs LED/m  
颜色: 1800K-6500K  
显色: ra ≥ 80, ra ≥ 90  
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重: 346g/meter

## AP12 Recessed LED Profile







编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.012.0009 (1m) 1.05.012.0010 (2m)	铝槽外壳 Aluminum profile		1.01.04.12.0002 (with hole) 1.01.04.12.0001 (w/o hole) 1.01.05.0162 (M2*8mm)	铝堵头 Aluminum end cap	
1.04.03.12.0003 (1m) 1.04.03.12.0004 (2m)	PA04-24 亚克力磨砂灯罩 PMMA frosted surface		1.01.07.0032 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.12.0025 (2m)	PA04-24B 亚克力黑色灯罩 Black PMMA cover				

Dimensions: W33\*H15\*L1000mm  
Customized length is available on request  
Input voltage: 24V DC  
Power: 25W/meter  
LED qty: 240pcs LED/m  
Color Temperature: 1800K-6500K  
CRI: ra ≥ 80, ra ≥ 90  
Beamangle: 110°  
Wiring come out: from the end  
from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature: -40°C~+45  
Weight: 312g/meter

尺寸: W33\*H15\*L1000mm  
可根据客户要求定制不同长度  
输出电压: 24V DC  
功率: 25W/meter  
灯珠数量: 240pcs LED/m  
颜色: 1800K-6500K  
显色: ra ≥ 80, ra ≥ 90  
发光角度: 110°  
出线方式: 尾部出线  
底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重: 312g/meter



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.003.0001 (1m) 1.05.003.0002 (2m) 1.05.003.0003 (3m)	铝槽外壳 Aluminum profile		1.02.04.03.0004 (with hole) 1.02.04.03.0005 (w/o hole)	塑胶堵头 Plastic end cap	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 亚克力磨砂灯罩 PMMA frosted surface		1.01.07.0002 1.01.05.0030 (M3*16mm)	不锈钢卡扣 stainless steel mounting clip	
1.04.03.01.0048 (2m)	PA02-15B 亚克力黑色灯罩 Black PMMA cover				


Dimensions: W26.7\*H18.3\*L1000mm  
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI: ra ≥ 80, ra ≥ 90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature: -40°C~+45  
 Net Weight: 315g/meter

Dimensions: W26.7\*H18.3\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色: 1800K-6500K  
 显色: ra ≥ 80, ra ≥ 90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45  
 净重: 315g/meter

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.003.0030 (1m) 1.05.003.0031 (2m)	铝槽外壳 Aluminum profile		1.02.04.03.0021 (with hole silver) 1.02.04.03.0022 (w/o hole silver)	塑胶堵头 Plastic end cap	
1.04.02.12.0001 (1m) 1.04.02.12.0002 (2m)	PC04-24 PC灯罩 PC milky surface		1.01.07.0028 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Metal mounting clip	

Dimensions: W46\*H18\*L1000mm  
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 30W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature: 2400-6500K  
 CRI: ra ≥ 80, ra ≥ 90  
 Beamangle: 110°  
 Wiring come out: from the end  
 from bottom  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature: -40°C~+45  
 Net Weight: 382g/meter

尺寸: W46\*H18\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 30W/meter  
 灯珠数量: 240pcs LED/m  
 颜色: 2400-6500K  
 显色: ra ≥ 80, ra ≥ 90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45  
 净重: 382g/meter



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.052.0007 (3m)	铝槽外壳 Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.01.0014 (1m) 1.04.03.01.0015 (2m) 1.04.03.01.0018 (3m)	PA02-15 亚克力灯罩 PMMA cover		1.01.04.62.0001 (left) 1.01.04.62.0002 (right) 1.01.05.0314 (M1.7*8mm)	铝槽堵头 Aluminum end cap	

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.013.0031 (1m) 1.05.013.0030 (2m) 1.05.013.0028 (3m)	铝散热片 aluminum plate		1.16.013.0028 (2M) 1.16.013.0016 (3M)	AP1303-12 PC 型材 PC milky profile	
1.02.04.13.0031 (with hole) 1.02.04.13.0032 (w/o hole)	塑胶堵头 Plastic end cap		1.01.07.0057 1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

Dimensions: W22\*H32.85\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:290g/meter

尺寸: W22\*H32.85\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色: 1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:290g/meter

Dimensions: W16.8\*H12.7\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:86g/meter

尺寸: W16.8\*H12.7\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:86g/meter



发光角度 Beam Angle:Asymmetric70°



发光角度 Beam Angle:Asymmetric85°

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.500.0082 (3.02m)	铝槽外壳 Aluminum profile		1.04.03.98.0022 (3.02m)	TP03 亚克力偏光灯罩 Asymmetric PMMA cover	
1.02.04.99.0044	塑胶堵头 Plastic end cap		1.01.07.0107 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.045.0007 (1m) 1.05.045.0006 (2m) 1.05.045.0005 (3.02m)	铝外壳 Aluminum profile		1.04.03.45.0002 (1m) 1.04.03.45.0004 (2m) 1.04.03.45.0005 (3m)	PAB04-16 亚克力偏光灯罩 PMMA Acymmetric cover	
1.01.04.45.0001 (with hole) 1.01.04.45.0002 (w/o hole) 1.01.05.0314 (M1.7*8mm)	铝堵头 Aluminum end cap		1.01.07.0059 1.01.05.0030 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	



Picture For Asymmetric Track Linear

Dimensions: W13.5\*H8.6\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 140pcs LED/m  
 Color Temperature: 1800K-6500K  
 显色 CRI:ra ≥80 , ra ≥90  
 Beamangle : Asymmetric 70°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45

尺寸: W13.5\*H8.6\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 140pcs LED/m  
 颜色: 1800K-6500K  
 显色 :ra ≥80 , ra ≥90  
 发光角度: 偏光 70°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度 : -40°C~+45

Dimensions: W16\*H11.8\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 15W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : Asymmetric 85°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:209g/meter

尺寸: W16\*H11.8\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 15W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色 :ra ≥80 , ra ≥90  
 发光角度: 偏光85°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度 : -40°C~+45  
 净重:209g/meter

AP4102-NEW LED Profile



发光角度 Beam Angle: 40°

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.041.0001 (1m) 1.05.041.0002 (2m)	铝槽外壳 Aluminum profile		1.02.04.41.0010 (with hole) 1.02.04.41.0011 (w/o hole)	塑胶堵头 Plastic end cap	
1.05.041.0015 (1m) 1.05.041.0016 (2m)	铝散热片 Aluminum plate		1.02.04.41.0012	塑胶堵头 Plastic end cap	
1.04.03.41.0017 (1M) 1.04.03.41.0016 (2M) 1.04.03.41.0015 (3M)	PAB06-9 亚克力灯罩 PMMA cover		1.01.07.0064  1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

Dimensions: W10\*H14.5\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 beamangle : 40°  
 wiring come out: from the end  
 from bottom  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:188g/meter

尺寸: W10\*H14.5\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 40°  
 出线方式: 尾部出线  
 底部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:188g/meter

AP0705-NEW LED Profile



发光角度 Beam Angle:45°



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.007.0021 (3.02m)	铝槽外壳 Aluminum profile		1.01.07.0085 1.01.05.0233 (M2.6*12mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.03.07.0009 (1m)	PA02-15 亚克力灯罩 PMMA cover		1.02.04.07.0001 1.01.05.0218 (M3*3mm)	塑胶堵头 Plastic end cap	

Dimensions: W15.5\*H23\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 15W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 45°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45

尺寸: W15.5\*H23\*L1000mm  
 (可根据客户要求定制不同长度)  
 输出电压:24V DC  
 功率: 15W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 45°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45




发光角度 Beam Angle: 55°

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.007.0001 (1m) 1.05.007.0002 (2m)	铝槽外壳 Aluminum profile		1.01.04.07.0014 (with hole) 1.01.04.07.0013 (w/o hole) 1.01.05.0232 (M2.7*10mm)	铝堵头 Aluminum end cap	
1.04.03.07.0012 (1m) 1.04.03.07.0011 (2m)	PAB05-15 亚克力灯罩 PMMA cover		2.02.HS.001	不锈钢180度可调节支架 adjustable stainless steel holder can be turned around 180°	

Dimensions: W19\*H23.5\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle : 55°  
 Wiring come out: from the end  
 from bottom  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:399g/meter

尺寸: W19\*H23.5\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度:55°  
 出线方式: 尾部出线  
 底部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:399g/meter



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.007.0001 (1m) 1.05.007.0002 (2m) 1.05.007.0004 (3m)	铝槽外壳 Aluminum profile		1.01.04.07.0001 (with hole) 1.01.04.07.0002 (w/o hole) 1.01.05.0232 (M2.7*10mm)	铝堵头 Aluminum end cap	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-1 亚克力灯罩 PMMA cover		2.02.HS.001	不锈钢180度可调节支架 adjustable stainless steel holder can be turned around 180°	

尺寸 Dimensions: W19\*H20\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
 from bottom  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:372g/meter

尺寸: W19\*H20\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800 K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度:110°  
 出线方式: 尾部出线  
 底部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:372g/meter



发光角度 Beam Angle: 100°

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.007.0016 (1m) 1.05.007.0018 (2m)	铝槽外壳 Aluminum profile		1.01.04.07.0025 (with hole) 1.01.04.07.0026 (w/o hole) 1.01.05.0232 (M2.7*10mm)	铝堵头 Aluminum end cap	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 亚克力灯罩 PMMA cover				

Dimensions: W19\*H23.7\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 100°  
 Wiring come out: from the end  
 from bottom  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:450g/meter

尺寸: W19\*H23.7\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度:100°  
 出线方式: 尾部出线  
 底部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:450g/meter



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.037.0010 (1m) 1.05.037.0011 (2m) 1.05.037.0012 (3m)	铝槽外壳 Aluminum profile		1.01.06.0035  1.01.05.0164 (M4*15mm)	衣撑架 fixing holder	
1.04.02.37.0028 (1m) 1.04.02.37.0026 (2m)	PC14-10 PC灯罩 PC milky cover		1.01.06.0037  1.01.05.0164 (M4*15mm)	衣通座 Fixing clip	
			1.05.037.0035 (1m) 1.05.037.0036 (2m) 1.05.037.0037 (3m)	铝散热器 Aluminum Plate	
			1.02.04.37.0003 (with hole silver) 1.02.04.37.0004 (w/o hole silver)	塑胶堵头 Plastic end cap	



Dimensions: W14.5\*H28\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from the end  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:331g/meter

尺寸: W14.5\*H28\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度:110°  
 出线方式: 尾部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:331g/meter

CP03 (AP3702) Wardrobe Alu LED Profile



it can be turn round 180 degree

美国市场已有独家代理  
NOT FOR USA MARKET !

编码Part No.	描述Description	图片Picture	编码Part No.	描述Description	图片Picture
1.05.037.0072 (1m) 1.05.037.0073 (2m) 1.05.037.0074 (3m)	铝槽外壳 Aluminum profile		1.01.04.37.0011 (with hole) 1.01.04.37.0012 (w/o hole) 1.01.05.0156 (M2.6*10mm)	铝堵头 Aluminum end cap	
1.04.02.37.0043 (1m)	PC03-15 PC 灯罩 PC milky cover		1.01.06.0046 (A) 1.01.06.0047 (B)	衣通座 fixing holder	
1.01.08.0070 1.01.05.0164 (M4*15mm)	衣撑架 fixing holder		1.01.05.0037 (M3*10mm) 1.01.05.0164 (M4*15mm)		

Dimensions: Ø30\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 20W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from the end

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:903g/meter

尺寸: Ø30\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 20W/meter  
灯珠数量: 120pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度:110°  
出线方式: 尾部出线

线长: 200mm  
防水等级: IP20  
工作温度:-40°C~+45  
净重:903g/meter

AP27 Tube LED Profile



美国市场已有独家代理  
NOT FOR USA MARKET !

编码Part No.	描述Description	图片Picture	编码Part No.	描述Description	图片Picture
1.05.027.0001 (1m) 1.05.027.0002 (2m)	铝槽外壳 Aluminum profile		1.01.04.23.0001 (with hole) 1.01.04.23.0002 (w/o hole) 1.01.05.0183 (M2*8mm)	铝堵头 Aluminum end cap	
1.04.02.27.0001 (1m) 1.04.02.27.0002 (2m)	PC07-13 PC 灯罩 PC milky cover		1.01.07.0013 1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

Dimensions: Ø15.8\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 15W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 120°  
Wiring come out: from the end

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:58.9g/meter

尺寸: Ø15.8\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 15W/meter  
灯珠数量: 120pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度:120°  
出线方式: 尾部出线

线长: 200mm  
防水等级: IP20  
工作温度:-40°C~+45  
净重: 58.9g/meter





编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.027.0010 (1m) 1.05.027.0017 (2m)	铝散热器 Aluminum plate		1.02.04.27.0001 (with hole) 1.02.04.27.0002 (w/o hole)	塑胶堵头 Plastic end cap	
1.04.02.27.0011 (1m)	PC09-D16 PC灯罩 PC milky cover		1.01.07.0013 1.01.05.0001 (M3*16mm)	不锈钢卡扣 Stainless steel mounting clip	

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.16.013.0001 (1M) 1.16.013.0002 (2M) 1.16.013.0003 (3M)	AP13-12F 亚克力磨砂型材 PMMA frosted profile		1.02.04.13.0001 (with hole) 1.02.04.13.0002 (w/o hole)	塑胶堵头 Plastic end cap	
1.16.013.0004 (1M) 1.16.013.0005 (2M) 1.16.013.0006 (3M)	AP13-12M 亚克力奶白型材 PMMA milky profile		1.02.07.0029 1.01.05.0229 (M3*16mm)	塑胶卡扣 plastic mounting clip	


Dimensions: Ø15.8\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 150°  
 Wiring come out: from the end  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:93g/meter

尺寸: Ø15.8\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度:150°  
 出线方式: 尾部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45  
 净重:93g/meter

Dimensions: W12\*H12\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 160°  
 Wiring come out: from the end  
  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45

尺寸: W12\*H12\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色 :1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度:160°  
 出线方式: 尾部出线  
  
 线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45

## DP13 Skirting Board Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.052.0008 (1m) 1.05.052.0009 (2m) 1.05.052.0005 (3.02m)	黑色喷粉铝槽外壳 Aluminum profile, black powder coating finish		1.01.07.0065  1.01.05.0164 (M4*15mm)	不锈钢卡扣 Stainless steel mounting clip	
1.05.052.0010 (1m) 1.05.052.0011 (2m) 1.05.052.0004 (3.02m)	白色喷粉铝槽外壳 Aluminum profile, white powder coating finish		1.04.02.41.0003 (1m) 1.04.02.41.0002 (2m) 1.04.02.41.0001 (3.02m)	PC32-9 PC 灯罩 PC milky cover	
1.05.052.0012 (1m) 1.05.052.0013 (2m) 1.05.052.0006 (3.02m)	工业灰喷粉铝槽外壳 Aluminum profile, grey powder coating finish		1.04.03.41.0003 (1m) 1.04.03.41.0004 (2m) 1.04.03.41.0002 (3m)	PA01-9 亚克力灯罩 PMMA frosted cover	
1.02.04.52.0003 (black Left) 1.02.04.52.0004 (black right)	塑胶堵头 Plastic end cap		1.01.08.0084 (black)	内转角 Inner corner connector (white and grey colours are available)	
			1.01.08.0087 (black)	外转角 Outer corner connector (white and grey colours are available)	


Dimensions: W15.5\*H80\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 10W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80, ra ≥90  
Beamangle: 80°  
Wiring come out: from the side

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:716g/meter

尺寸: W15.5\*H80\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 10W/meter  
灯珠数量: 120pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80, ra ≥90  
发光角度:80°  
出线方式: 侧面出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重:716g/meter

## DP03 (AP3603) Recessed Wall Lamp



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.036.0051 (1m) 1.05.036.0052 (2m) 1.05.036.0053 (3m)	铝槽外壳 Aluminum profile		1.02.05.0005	固定螺丝 Fixing screws	
1.01.04.36.0021 (left) 1.01.04.36.0022 (right)  1.01.05.0156 (M2.6*10mm)	铝堵头 Aluminum end cap				

尺寸 Dimensions: W17.5\*H70\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 10W/meter  
LED qty: 120pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80, ra ≥90  
Beamangle: 70°  
Wiring come out: from the side

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45

尺寸: W17.5\*H70\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 10W/meter  
灯珠数量: 120pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80, ra ≥90  
发光角度:70° 偏光  
出线方式: 底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45

## DP01 (AP4301) Step Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.043.0001 (1m)	铝槽外壳 Aluminum profile		1.04.02.41.0003 (1m)	PC32-9 PC 灯罩 PC milky cover	
1.05.043.0002 (2m)					
1.05.043.0003 (3m)					
1.01.04.43.0001 (A)	铝堵头 Aluminum end cap				
1.01.04.43.0002 (B)					
1.01.05.0162 (M2*8mm)					



Dimensions: W64.27\*H29\*L1000mm  
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI: ra ≥ 80, ra ≥ 90  
 Beamangle: 110°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature: -40°C~+45  
 Net Weight: 835g/meter

尺寸: W64.27\*H29\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色: 1800K-6500K  
 显色: ra ≥ 80, ra ≥ 90  
 发光角度: 110°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45  
 净重: 835g/meter

## DP06 (AP3301) Plaster Construction LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.033.0001 (1m)	铝槽外壳 Aluminum profile		1.02.04.34.0011 (with hole/silver)	塑胶堵头 Plastic end cap	
1.05.033.0002 (2m)					
1.05.033.0003 (3m)					
1.04.02.34.0014 (1m)	PC12-11 PC 灯罩 PC milky cover				
1.04.02.34.0015 (2m)					
1.04.02.34.0016 (3m)					

Dimensions: W58.5\*H15.7\*L1000mm  
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI: ra ≥ 80, ra ≥ 90  
 Beamangle: 110°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature: -40°C~+45

尺寸: W58.5\*H15.7\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色: 1800K-6500K  
 显色: ra ≥ 80, ra ≥ 90  
 发光角度: 110°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45

## DP07 (AP3304) Plaster Construction LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.033.0031 (1m)	铝槽外壳 Aluminum profile		1.02.04.33.0031 (with hole/silver)	塑胶堵头 Plastic end cap	
1.05.033.0032 (2m)			1.02.04.33.0032 (w/o hole/silver)		
1.05.033.0033 (3m)					
1.04.02.34.0014 (1m)	PC12-11 PC 灯罩 PC milky cover				
1.04.02.34.0015 (2m)					
1.04.02.34.0016 (3m)					

Dimensions: W35.2\*H14.5\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 10W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle: 110°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:86g/meter

尺寸: W35.2\*H14.5\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 10W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度: 110°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45  
 净重: 86g/meter

## DP10 (AP3305) Plaster Construction LED Profile




编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.033.0045 (1m)	铝槽外壳 Aluminum profile		1.04.03.33.0001 (1m)	PA09-18 亚克力奶白灯罩 PMMA milky cover	
1.05.033.0046 (2m)			1.04.03.33.0002 (2m)		
1.01.04.33.0041	铝堵头 Aluminum end cap		1.04.03.33.0007 (2m)	PA09-18B 黑色亚克力灯罩 Black PMMA cover	
1.01.05.0162 (M2*8mm)					

Dimensions: W42\*H20\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 120pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80, ra ≥90  
 Beamangle: 110°  
 Wiring come out: from the side

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45

尺寸: W42\*H20\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 20W/meter  
 灯珠数量: 120pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80, ra ≥90  
 发光角度: 110°  
 出线方式: 侧面出线

线长: 200mm  
 防水等级: IP20  
 工作温度: -40°C~+45

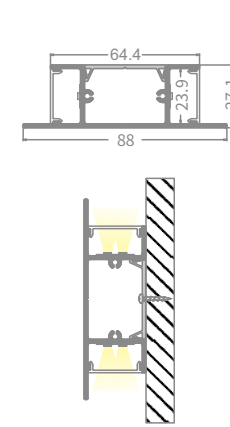

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.012.0029 (1m) 1.05.012.0030 (2m) 1.05.012.0028 (3.02m)	铝槽外壳 Aluminum profile		1.01.04.21.0007 (with hole) 1.01.04.21.0008 (w/o hole) 1.01.05.0162 (M2*8mm)	铝堵头 Aluminum end cap	
1.04.03.12.0003 (1m) 1.04.03.12.0004 (2m)	PA04-24 亚克力磨砂灯罩 PMMA frosted cover				

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.036.0001 (1m) 1.05.036.0002 (2m)	铝槽外壳 Aluminum profile		1.02.04.36.0001 (white) 1.02.04.36.0002 (silver) 1.01.05.0083 (ST3*10)	塑胶堵头 Plastic end cap	
1.04.02.12.0012 (1m) 1.04.02.12.0010 (2m) 1.04.02.12.0009 (3.02m)	PC04-24 PC灯罩 PC cover		1.05.036.0013 1.01.05.0032 (M4*16mm)	铝扣板 Aluminum fixing holder	

Dimensions: W64\*H15.5\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 15W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 120°  
 Wiring come out: from bottom  
 from the end  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45

尺寸: W64\*H15.5\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 15W/meter  
 灯珠数量: 240pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 120°  
 出线方式: 底部出线  
 尾部出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45

Dimensions: W88\*H27.1\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 20W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 90°  
 Wiring come out: from the side  
 Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:979g/meter

尺寸: W88\*H27.1\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 20W/meter  
 灯珠数量: 240pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 90°  
 出线方式: 侧面出线  
 线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:979g/meter

OP3503 Track Rail Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.035.0051 (1m) 1.05.035.0056 (2m)	铝槽外壳 Aluminum profile		1.05.035.0055 (1m) 1.05.035.0060 (2m) 1.01.05.0030 (M3*16mm)	铝扣板 Aluminum fixing holder	
1.04.02.35.0001 (3.02m)	PC20-35 PC 灯罩 PC milky cover		1.01.04.35.0021 1.01.05.0156 (M2.6x10mm)	铝堵头 Aluminum end cap	
1.01.06.0033	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length				

Dimensions: W35\*H50\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 30W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 190°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:641g/meter

尺寸: W35\*H50\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 30W/meter  
 灯珠数量: 240pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 190°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:641g/meter

OP3504 Track Rail Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.035.0052 (1m) 1.05.035.0076 (2m) 1.05.035.0069 (3m)	铝槽外壳 Aluminum profile		1.05.035.0055 (1m) 1.05.035.0060 (2m) 1.01.05.0030 (M3*16mm)	铝扣板 Aluminum fixing holder	
1.04.02.35.0001 (3.02m)	PC20-35 PC 灯罩 PC milky cover		1.01.04.35.0022 1.01.05.0156 (M2.6x10mm)	铝堵头 Aluminum end cap	
1.01.06.0033	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length				

Dimensions: W35\*H65\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 30W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 190°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:929g/meter

尺寸: W35\*H65\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 30W/meter  
 灯珠数量: 240pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 190°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:929g/meter

## OP3502 Track Rail Light LED Profile



NOT FOR AUSTRALIA  
AND NEW ZEALAND MARKET!

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.035.0052 (1m) 1.05.035.0076 (2m) 1.05.035.0069 (3m)	铝槽外壳 Aluminum profile		1.05.035.0054 (1m) 1.05.035.0059 (2m) 1.01.05.0030 (M3*16mm)	铝扣板 Aluminum fixing holder	
1.04.02.35.0013 (1m) 1.04.02.35.0012 (2m) 1.04.02.35.0011 (3.02m)	PC38-33 PC灯罩 PC milky cover		1.01.04.35.0004 1.01.05.0156 (M2.6x10 mm)	铝堵头 Aluminum end cap	
1.01.06.0033	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length		1.01.08.0118 1.01.05.0207 (M4*4 mm)	连接条 Extension connector	

Dimensions: W35\*H35\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 30W/meter  
LED qty: 240pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:851g/meter

尺寸: W35\*H35\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 30W/meter  
灯珠数量: 240pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度: 110°  
出线方式: 底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重: 851g/meter

## OP3506 Track Rail Light LED Profile



NOT FOR AUSTRALIA  
AND NEW ZEALAND MARKET!

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.035.0053 (1m) 1.05.035.0058 (2m)	铝槽外壳 Aluminum profile		1.01.04.35.0023 1.01.05.0156 (M2.6x10 mm)	铝堵头 Aluminum end cap	
1.04.02.35.0004 (1m) 1.04.02.35.0003 (2m) 1.04.02.35.0002 (3.02m)	PC33-35 PC灯罩 PC cover		2.02.HS.003	嵌入式弹簧卡扣 Spring bracket	
1.01.08.0092 1.01.05.0218 (M3*3 mm)	连接条 Extension connector Self-tapping screws				

Dimensions: W45\*H30\*L1000mm  
Customized length is available on request  
Input voltage:24V DC  
Power: 30W/meter  
LED qty: 240pcs LED/m  
Color Temperature:1800K-6500K  
CRI:ra ≥80 , ra ≥90  
Beamangle : 110°  
Wiring come out: from bottom

Cable length: 200mm  
IP rating: IP20  
Working Temperature:-40°C~+45  
Net Weight:744g/meter

尺寸: W45\*H30\*L1000mm  
可根据客户要求定制不同长度  
输出电压:24V DC  
功率: 30W/meter  
灯珠数量: 240pcs LED/m  
颜色:1800K-6500K  
显色:ra ≥80 , ra ≥90  
发光角度: 110°  
出线方式: 底部出线

线长: 200mm  
防水等级: IP20  
工作温度: -40°C~+45  
净重: 744g/meter

## OP04 (AP2402) Office Commercial Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.024.0038 (1m) 1.05.024.0039 (2m)	铝槽外壳 Aluminum profile		1.02.04.24.0012 (with hole silver) 1.02.04.24.0011 (w/o hole silver) 1.01.05.0156 (M2.6*10mm)	塑胶堵头 Plastic end cap	
1.04.03.24.0004 (1m) 1.04.03.24.0003 (2m)	PA10-43 亚克力奶白灯罩 PMMA milky cover		1.05.024.0011 (1m) 1.05.024.0012 (2m)	铝散热片 Aluminum Plate	
1.04.03.24.0020 (2m)	PA10-43B 亚克力黑色灯罩 Black PMMA cover		1.01.06.0033	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length	

Dimensions: W46\*H50\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 40W/meter  
 LED qty: 360pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:1334g/meter

尺寸: W46\*H50\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 40W/meter  
 灯珠数量: 360pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:1334g/meter

## OP03 (AP2401) Office Commercial Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.024.0055 (1m) 1.05.024.0056 (2m)	铝槽外壳 Aluminum profile		1.01.04.24.0004 (with hole) 1.01.04.24.0003 (w/o hole) 1.01.05.0156 (M2.6*10mm)	铝堵头 Aluminum end cap	
1.04.03.24.0004 (1m) 1.04.03.24.0003 (2m)	PA10-43 亚克力奶白灯罩 PMMA milky cover		1.05.024.0011 (1m) 1.05.024.0012 (2m)	铝散热片 Aluminum Plate	
1.04.03.24.0020 (2m)	PA10-43B 亚克力黑色灯罩 Black PMMA cover		1.01.07.0063	嵌入式弹簧卡扣 Spring bracket	

Dimensions: W62\*H50\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 40W/meter  
 LED qty: 360pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 110°  
 Wiring come out: from bottom


Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:1316g/meter

尺寸: W62\*H50\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 40W/meter  
 灯珠数量: 360pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 110°  
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:1316g/meter



OP07(AP1901) Office Commercial Light LED Profile

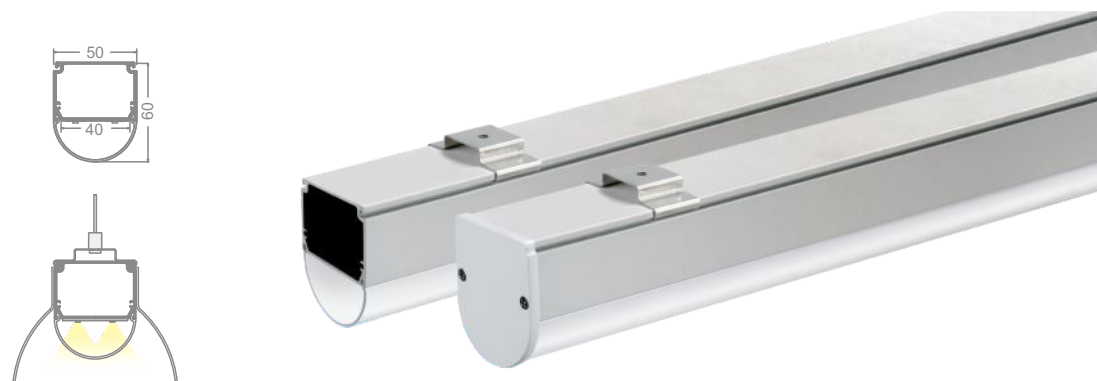

编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.019.0040 (1m)	铝槽外壳 Aluminum profile		1.01.07.0005 1.01.05.0032 (M4*16mm)	不锈钢卡扣 Stainless steel mounting clip	
1.04.02.19.0003 (1m)	PC19-D50 PC灯罩 PC milky cover		1.02.04.19.0004 (with hole) 1.02.04.19.0005 (w/o hole) 1.01.05.0083 (ST3*10)	塑胶堵头 Plastic end cap	
1.01.06.0033	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length				

Dimensions: W50\*H60\*L1000mm  
 Customized length is available on request  
 Input voltage:24V DC  
 Power: 40W/meter  
 LED qty: 360pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 140°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:970g/meter

尺寸: W50\*H60\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 40W/meter  
 灯珠数量: 360pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 140°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:970g/meter

OP08 (AP1902) Track Rail Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.019.0040 (1m)	铝槽外壳 Aluminum profile		1.04.02.19.0010 (1m)	PC18-50 PC灯罩 PC milky cover	
1.01.06.0033	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length		1.02.04.19.0011 (with hole) 1.02.04.19.0010 (w/o hole) 1.01.05.0083 (ST3*10)	塑胶堵头 Plastic end cap	
1.01.07.0005 1.01.05.0032 (M4*16mm)	不锈钢卡扣 Stainless steel mounting clip				


Dimensions: W50\*H56\*L1000mm  
 Customized length is available on request.)  
 Input voltage:24V DC  
 Power: 40W/meter  
 LED qty: 360pcs LED/m  
 Color Temperature:1800K-6500K  
 CRI:ra ≥80 , ra ≥90  
 Beamangle : 140°  
 Wiring come out: from the end  
 from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:-40°C~+45  
 Net Weight:975g/meter

尺寸: W50\*H56\*L1000mm  
 可根据客户要求定制不同长度  
 输出电压:24V DC  
 功率: 40W/meter  
 灯珠数量: 360pcs LED/m  
 颜色:1800K-6500K  
 显色:ra ≥80 , ra ≥90  
 发光角度: 140°  
 出线方式: 尾部出线  
 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:-40°C~+45  
 净重:975g/meter

## OP01 (AP3801) Office Commercial Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.038.0003 (1m) 1.05.038.0004 (2m)	铝槽外壳 Aluminum profile		1.01.04.38.0001 1.01.05.0156 (M2.6*10mm)	铝堵头 Aluminum end cap	
1.04.02.38.0001 (1m) 1.04.02.38.0002 (2m)	PC15-D60 PC 灯罩 PC milky cover		1.01.06.0078	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length	


Dimensions:  $\varnothing 60 \times L1000\text{mm}$   
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 40W/meter  
 LED qty: 240pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI:  $ra \geq 80$ ,  $ra \geq 90$   
 Beamangle:  $170^\circ$   
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:  $-40^\circ\text{C} \sim +45$   
 Net Weight: 774g/meter

尺寸:  $\varnothing 60 \times L1000\text{mm}$   
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 40W/meter  
 灯珠数量: 240pcs LED/m  
 颜色: 1800K-6500K  
 显色:  $ra \geq 80$ ,  $ra \geq 90$   
 发光角度:  $170^\circ$   
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:  $-40^\circ\text{C} \sim +45$   
 净重: 774g/meter

## OP02 (AP3802) Office Commercial Light LED Profile



编码 Part No.	描述 Description	图片 Picture	编码 Part No.	描述 Description	图片 Picture
1.05.038.0030 (1m) 1.05.038.0031 (2m)	铝槽外壳 Aluminum profile		1.01.04.38.0011 1.01.05.0209 (M3*5mm)	铝堵头 Aluminum end cap	
1.04.02.38.0011 (1m) 1.04.02.38.0012 (2m)	PC16-D100 PC 灯罩 PC milky cover		1.01.06.0078	1.5米不锈钢吊绳 Stainless steel rope 1.5 meter length	

Dimensions:  $\varnothing 100 \times L1000\text{mm}$   
 Customized length is available on request  
 Input voltage: 24V DC  
 Power: 60W/meter  
 LED qty: 360pcs LED/m  
 Color Temperature: 1800K-6500K  
 CRI:  $ra \geq 80$ ,  $ra \geq 90$   
 Beamangle:  $170^\circ$   
 Wiring come out: from bottom

Cable length: 200mm  
 IP rating: IP20  
 Working Temperature:  $-40^\circ\text{C} \sim +45$   
 Net Weight: 1119g/meter

尺寸:  $\varnothing 100 \times L1000\text{mm}$   
 可根据客户要求定制不同长度  
 输出电压: 24V DC  
 功率: 60W/meter  
 灯珠数量: 360pcs LED/m  
 颜色: 1800K-6500K  
 显色:  $ra \geq 80$ ,  $ra \geq 90$   
 发光角度:  $170^\circ$   
 出线方式: 底部出线

线长: 200mm  
 防水等级: IP20  
 工作温度:  $-40^\circ\text{C} \sim +45$   
 净重: 1119g/meter