

# ATENIC TOBILED 2024

No.5 building, Qingwan industrial zone, Sanzao Town, Jinwan District,  
Zhuhai City, Guangdong province, China, 519040

Contact No.: 0086-756-6805251/6805252/6805253/6805254/  
6805465/6805310;

Email: info@tobiled.com www.tobiled.com Fax: 0086-756-6805559

TOBILED CO., LIMITED ALL rights reserved.  
Designs and specifications may change without prior notice.



Ut90 "clip in" (with patent) linear panel light system, easy to fix, super slim, 220-240V with DALI /1-10V dimming function, with our Y, L, T connector, it is flexible for customer to design different shape. UGR<19, perfect use for mall, supermarket, office and so on, can be installed by ceiling, mounting, suspending, and track system.


## Installation Methods



Ceiling



Surface mounting





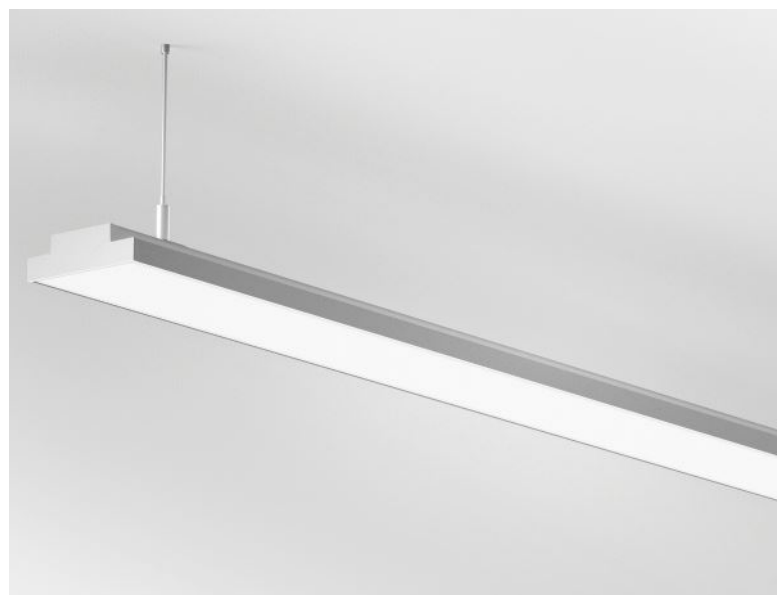


Suspended



With track system






# Ut90 AL1 For Surface Mounting / Suspending

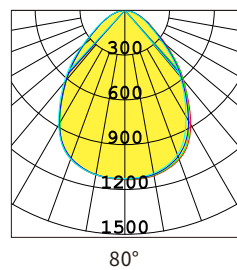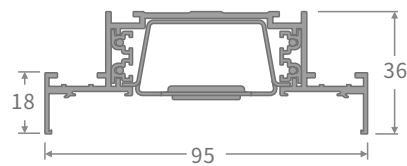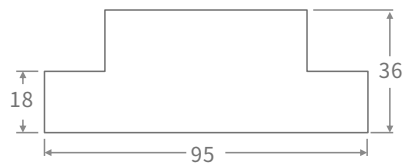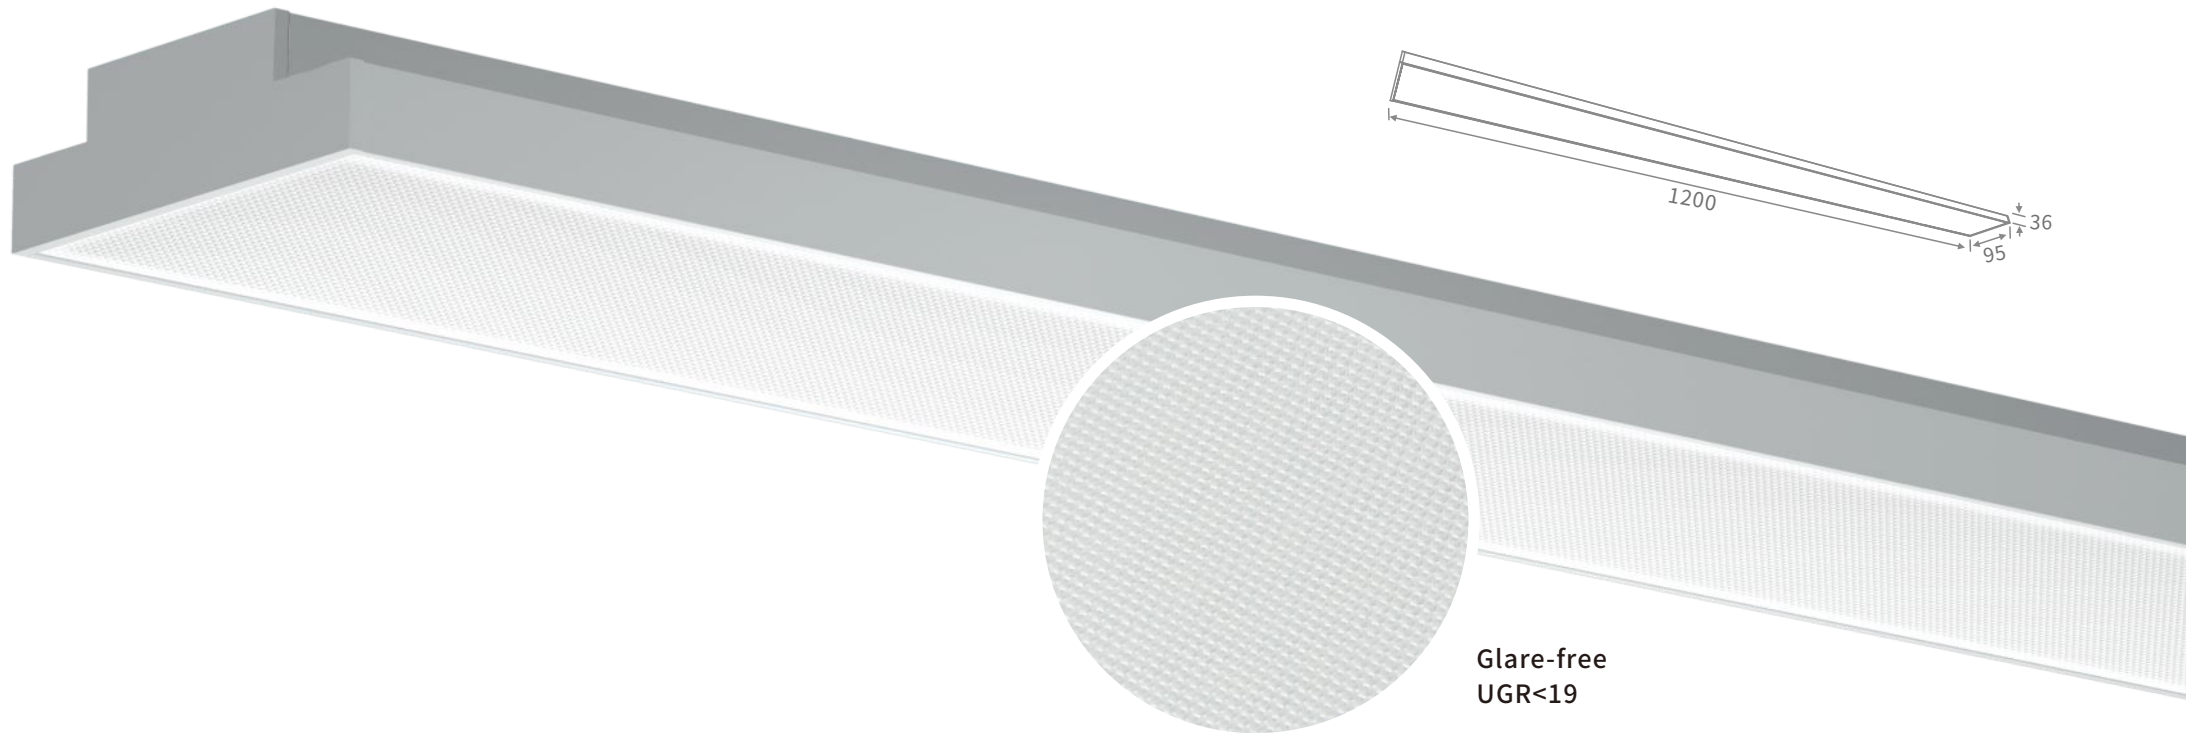






Basic Parameter	
Dimension	L1200*W95*H36mm
Input Voltage	220-240VAC
Power	18.5 W
Luminous Efficiency	89.7 Lm/W (CCT:3000K,CRI>90)
IP Class	IP40
Beam Angle (50%)	80 °
CCT	2700K/3000K/3500K/4000K
CRI	≥80, ≥90
Dimmable	DALI / 1-10V
Warranty	5 years








# UT90AL1-Y Connector

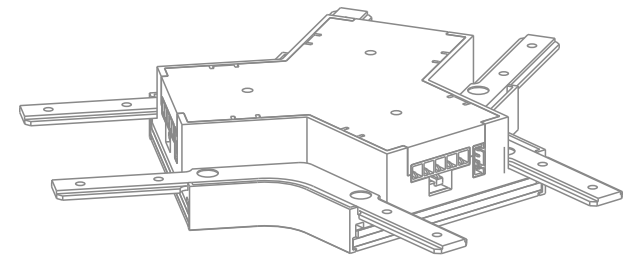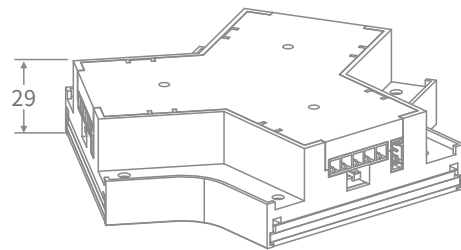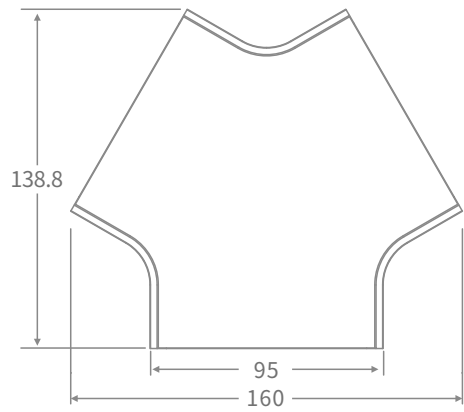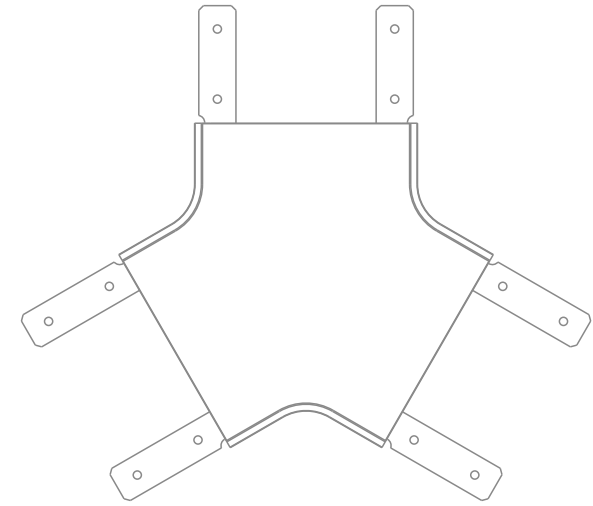













# UT90AL1-T Connector

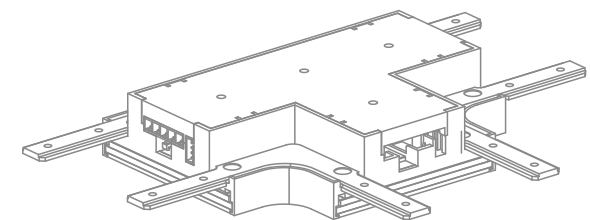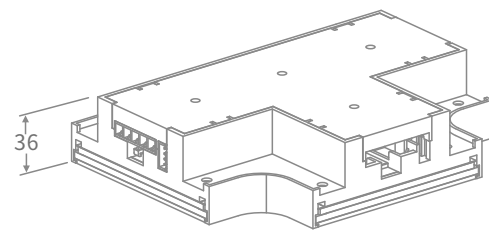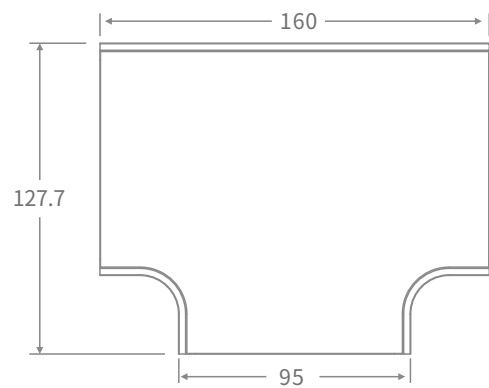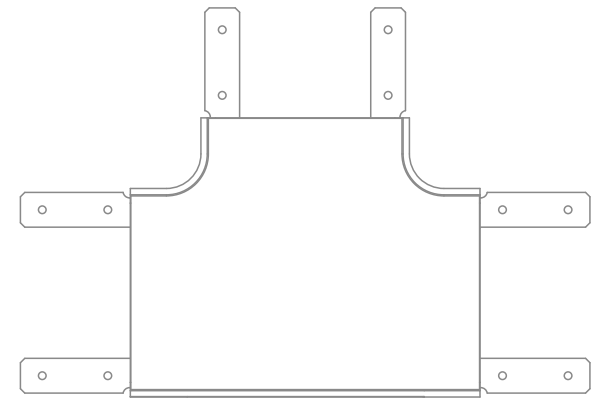

# UT90AL1-L Connector

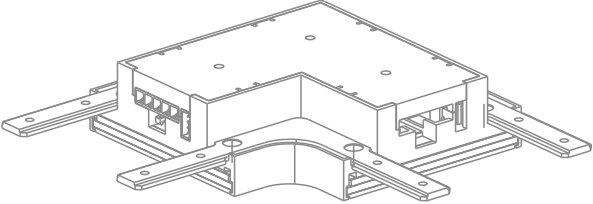
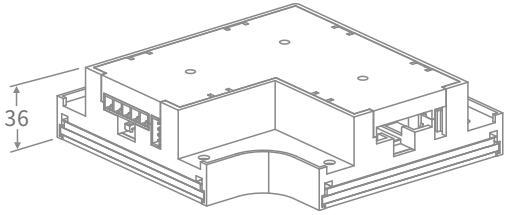
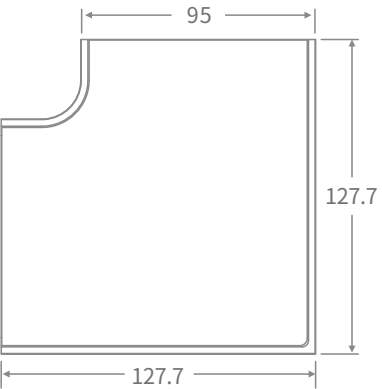

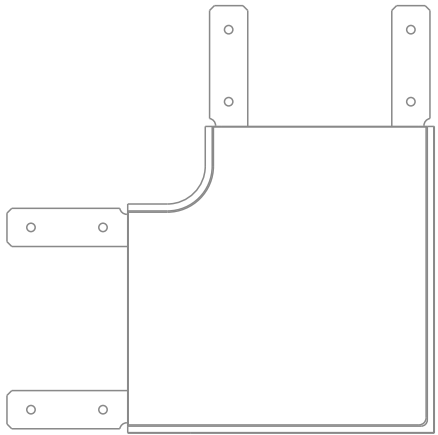


# Connecting Shapes

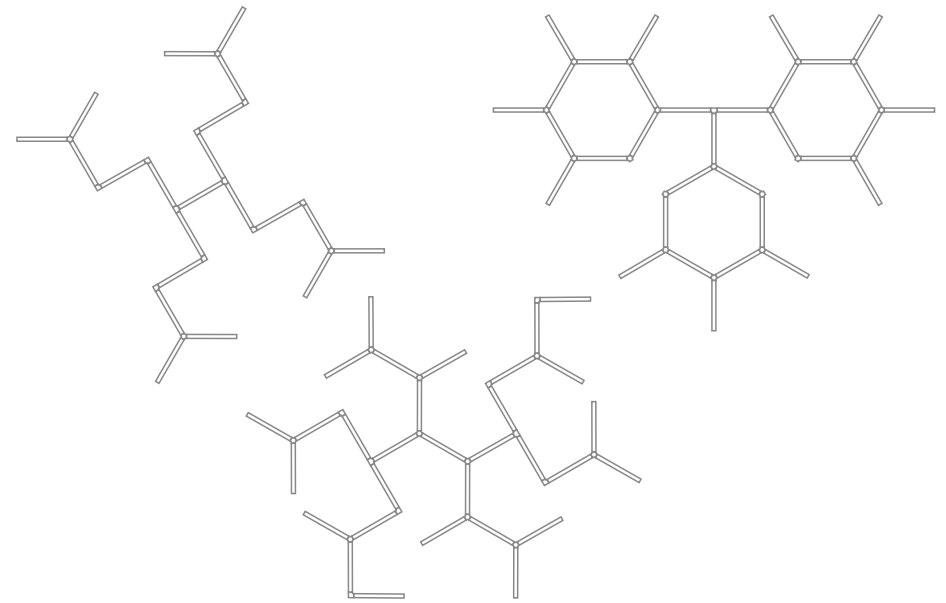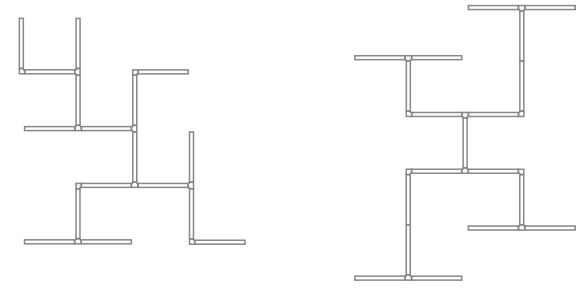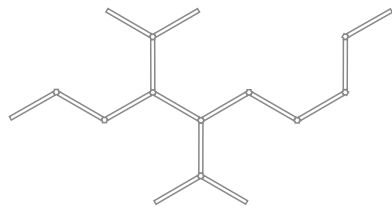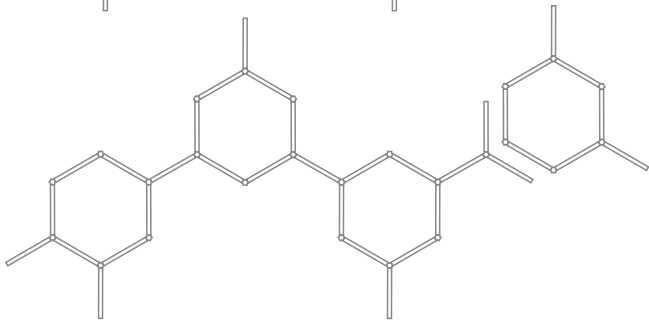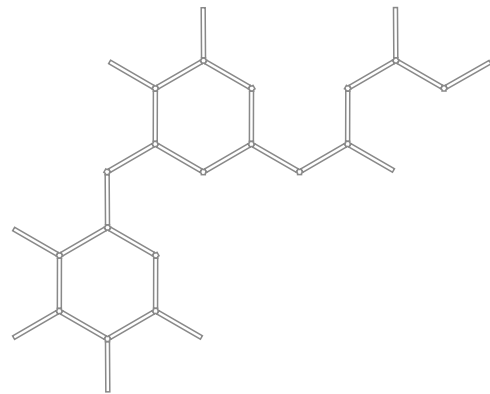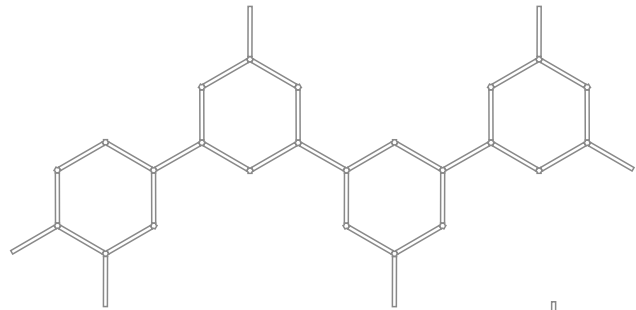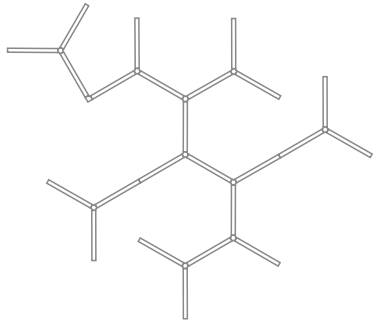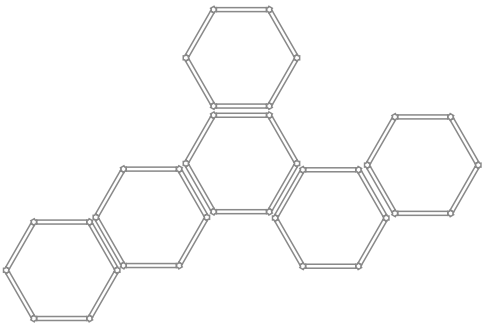








# UT90 AL2 For Ceiling

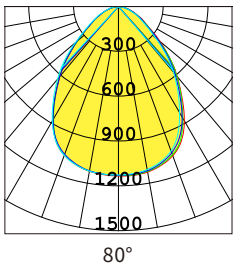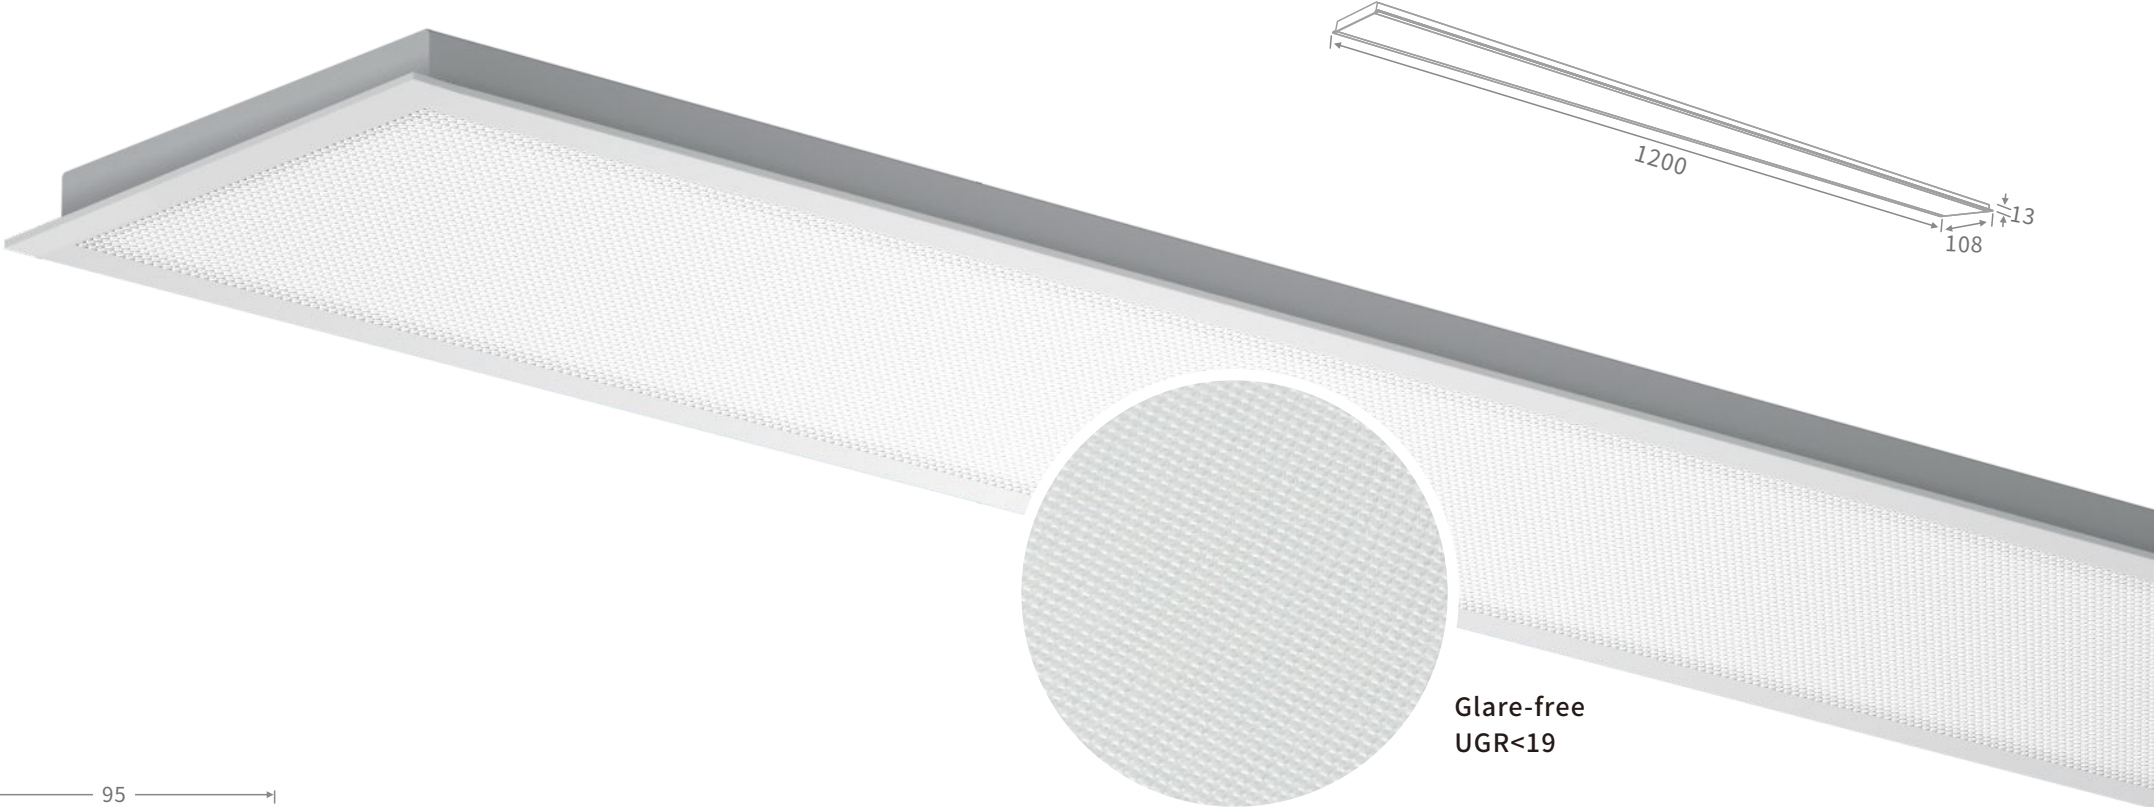

### Basic Parameter

Dimension	L1200*W108*H13mm
Input Voltage	220-240VAC
Power	18.5 W
Luminous Efficiency	89.7 Lm/W (CCT:3000K,CRI>90)
IP Class	IP40
Beam Angle (50%)	80 °
CCT	2700K/3000K/3500K/4000K
CRI	≥80, ≥90
Dimmable	DALI / 1-10V
Warranty	5 years

# Removable UT90 Track light

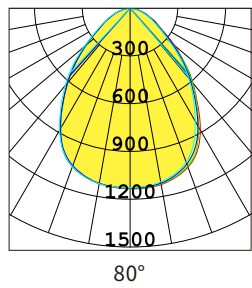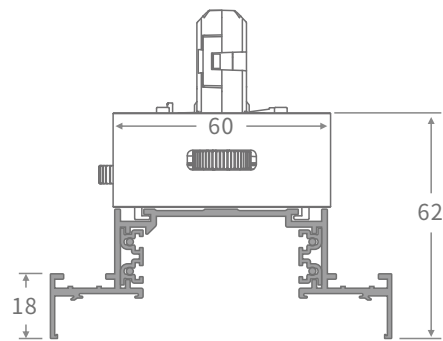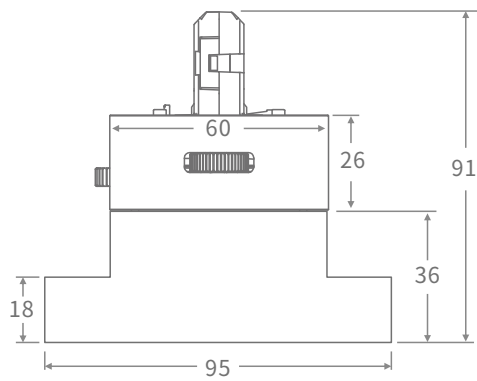

Input Voltage  
Power

Basic Parameter	
Dimension	L1200*W95*H62mm
Net Weight	3.39kg
Input Voltage	220-240VAC
Power	20 W
Luminous Efficiency	106.3 Lm/W (CCT:3000K,CRI>80)
IP Class	IP40
Beam Angle (50%)	80 °
CCT	2700K/3000K/3500K/4000K
CRI	≥80, ≥90
Dimmable	DALI / 1-10V
Warranty	5 years



