2024 CA

Home Lighting

TA

LOG

02



LANYAN

精益求精不断创新

MORE HOT ITEMS FOR SALE NOW lanyanlighting.com

About Us



For more daily news, please follow our LinkedIn page: www.linkedin.com/company/lanyanlighting



Who We Are

LANYAN Lighting Technology Co.,LTD. (since 2010) locates in the most famous Chinese lighting city – GuZhen City. We focuse on the manufacture and development of daily and commercial LED Lighting. We offer professional OEM/ODM/SKD LED lighting solutions and branding and marketing support to clients.

Quality Assurance

LANYAN owns a complete range of lighting quality certifications: including CE, ROHS, FCC, etc., and the quality standards meet the export to most international lighting markets.

Guarantee of Credit

LANYAN was established in 2010, who supplies products to more than 20 countries around the world. Choosing LANYAN as a strategy partner, well-known lighting brands such as PHILLIPS, OSRAM, EVERGREEN, FS Lighting and Oppo Lighting, etc. have deep and long-term cooperation with LANYAN.

Guarantee of Production Capacity

LANYAN invests in a series of light source production bases, we own a driver factory, an LED bulb factory, and a LED downlight and track light factory. And one overseas factory in Kazakhstan. The Headquarter which locates in GuZhen, has a spacious workshop of 3,000 square meters. Including advanced equipments there. Our monthly production capacity (2021~2022): 3 million(pcs) of finished LED bulbs, 10 million SKD; 1 million finished LED down lights, 5 million SKD; 500,000 finished LED track lights, 2 million SKD. The monthly export volume amounts to RMB 10million, and the average monthly export container volume is 20 high containers and 50 truckloads of bulk cargoes.

The Markets Where Our Products Are Being Sold

China, Central Europe, the Middle East (Saudi Arabia, Iran, Kuwait, etc.), Southeast Asia (India, Pakistan, Malaysia, Indonesia, etc.), Western Europe (Germany, Slovenia), East Asia (Japan), North America (United States), South America (Brazil, Mexico, Venezuela, Peru, etc.).











Series

Material

Lamp Base

CCT(Color temperature)

Working Voltage (AC/V)

Lumen Efficiency (Lm/W)

P.F. (power factor)

CRI

Driver

Surge Protect

Certificate

Product Size

Power Include

LYA (LED A Bulb)

PC Cover & PBT Housing

Aluminum Heat Sing

Nickel-plated iron base

E27/B22/E14

3000K/6500K/4000K

AC 100-277V

100 lm/w

0.5 / 0.9

>80

Isolated

1.5KV

CE, RHos

from 50 ~ 95mm

from 3W ~ 24W













Series

Material **PC Cover & PBT Housing Aluminum Heat Sing**

Nickel-plated iron base

LYT (LED T Bulb)

Lamp Base E27/B22/

CCT(Color temperature) 3000K/6500K/4000K

Working Voltage (AC/V) AC 100-277V

Lumen Efficiency (Lm/W) 100 lm/w

0.5 / 0.9 P.F. (power factor)

CRI >80

Isolated Driver

1.5KV **Surge Protect**

CE, RHos Certificate

from 50 ~ 150mm **Product Size**

from 5W ~ 50W Power Include





VARIOUS HOUSINGS

LYT-CP12



LYT-CP16



LYT-CP20



LYT-CP23



LYT-CP28



LYT-CP31



LYT-CP33



LYT-CP35



LYT-CP36



LYT-CP37



Shot cover Series













Series

Material

Lamp Base

CCT(Color temperature)

Working Voltage (AC/V)

Lumen Efficiency (Lm/W)

P.F. (power factor)

CRI

Driver

Surge Protect

Certificate

Product Size

Power Include

LYBA (LED BA Bulb)

PC Cover & PBT Housing

Aluminum Heat Sing Nickel-plated iron base

E26/E27/B22/E39/E40

3000K/6500K/4000K

AC 100-277V

100 lm/w

0.5 / 0.9

>80

Isolated

1.5KV

CE, RHos

from 120 ~ 310mm

from 35W ~ 85W













Series

Material

Lamp Base

CCT(Color temperature)

Working Voltage (AC/V)

Lumen Efficiency (Lm/W)

P.F. (power factor)

CRI

Driver

Surge Protect

Certificate

Product Size

Power Include

LYB (LED Bowling Bulb)

PC Cover & PBT Housing

Aluminum Heat Sing

Nickel-plated iron base

E26/E27/B22/E39/E40

3000K/6500K/4000K

AC 100-277V

100 lm/w

0.5 / 0.9

>80

Isolated

1.5KV

CE, RHos

from 58 ~ 120mm(diameter)

from 10W ~ 50W













Series LYR (LED R Bulb)

Material **PC Cover & PBT Housing**

Aluminum Heat Sing Nickel-plated iron base

Lamp Base E27/B22/E14

CCT(Color temperature) 3000K/6500K

Working Voltage (AC/V) AC 100-277V

Lumen Efficiency (Lm/W) 100 lm/w

0.5 / 0.9 P.F. (power factor)

CRI >80

Isolated Driver

1.5KV **Surge Protect**

CE, RHos Certificate

from 39 ~ 90mm(diameter) **Product Size**

from 4W ~ 18W Power Include













Series LYI (LED I Bulb)

Material **PC Cover & PBT Housing**

Aluminum Heat Sing Nickel-plated iron base

Lamp Base E27/B22/E14/G24

CCT(Color temperature) 3000K/6500K/4000K

Working Voltage (AC/V) AC 100-277V

Lumen Efficiency (Lm/W) 100 lm/w

0.5 / 0.9 P.F. (power factor)

CRI >80

Isolated Driver

1.5KV **Surge Protect**

CE, RHos Certificate

from 98 ~ 146mm (high) **Product Size**

from 5W ~ 18W Power Include













Series

Material

Lamp Base

CCT(Color temperature)

Working Voltage (AC/V)

Lumen Efficiency (Lm/W)

P.F. (power factor)

CRI

Driver

Surge Protect

Certificate

Product Size

Power Include

LYC (LED Candle Bulb)

PC Cover & PBT Housing

Aluminum Heat Sing

Nickel-plated iron base

E27/B22/E14

3000K/6500K/4000K

AC 100-277V

100 lm/w

0.5 / 0.9

>80

Isolated

1.5KV

CE, RHos

from 107 ~ 145mm (hight)

from 3W ~ 9W





LED Spotlight









Series

Material

Lamp Base

CCT(Color temperature)

Working Voltage (AC/V)

Lumen Efficiency (Lm/W)

P.F. (power factor)

CRI

Driver

Surge Protect

Certificate

Power Include

LYMR (LED MR SPOTLIGHT)

PC Cover & PBT Housing Aluminum Heat Sing

GU5.3 / GU10.0

3000K/6500K

AC 100-277V

90 lm/w

0.59

>80

Isolated


1.5KV

CE, RHos

5W / 7W





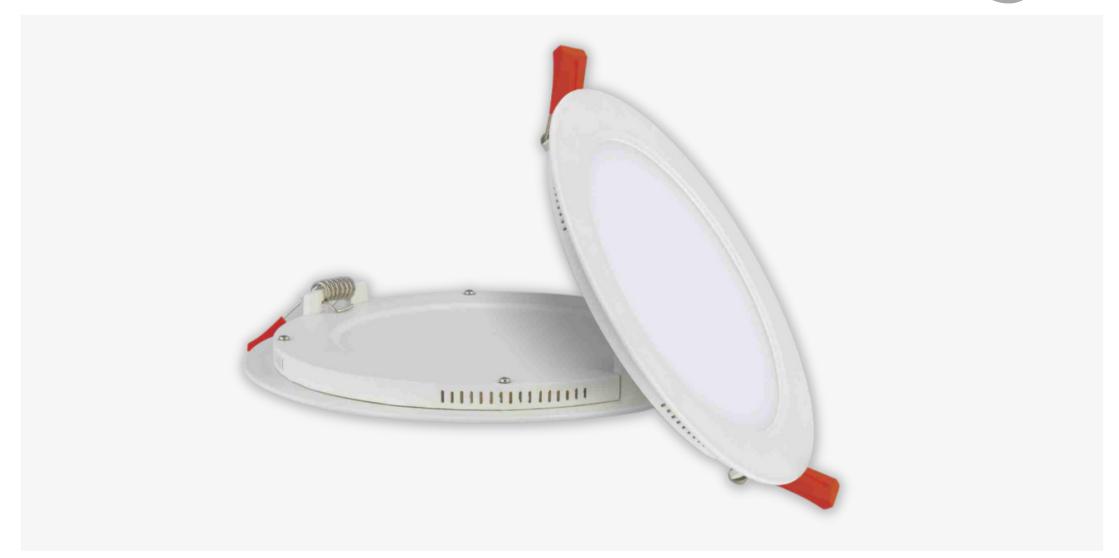





Series

Material

CCT(Color temperature)

Working Voltage (AC/V)

Lumen Efficiency (Lm/W)

P.F. (power factor)

CRI

Driver

Surge Protect

Certificate

Product Size

Power Include

LYPRR (Recessed Round)

Painting White Housing

Material: Aluminium

3000K/6500K/4000K

AC 100-277V

100 lm/w

0.5 / 0.9

>80

Isolated

1.5KV

CE, RHos

from 85 ~ 300mm (diameter)

from 3W ~ 24W











Series LYPRS (Recessed Square)

Material **PC Cover & PBT Housing**

> **Aluminum Heat Sing** Nickel-plated iron base

Lamp Base E27/B22/E14

CCT(Color temperature) 3000K/6500K

Working Voltage (AC/V) AC 100-277V

Lumen Efficiency (Lm/W) 100 lm/w

P.F. (power factor) 0.5 / 0.9

>80 **CRI**

Isolated **Driver**

1.5KV **Surge Protect**

CE, RHos Certificate

from 85 ~ 300mm (diameter) **Product Size**

from 3W ~ 24W Power Include











Series LYPSR (Surface Round)

Material **PC Cover & PBT Housing**

> **Aluminum Heat Sing** Nickel-plated iron base

Lamp Base E27/B22/E14

CCT(Color temperature) 3000K/6500K

Working Voltage (AC/V) AC 100-277V

Lumen Efficiency (Lm/W) 100 lm/w

0.5 / 0.9 P.F. (power factor)

CRI >80

Isolated **Driver**

1.5KV **Surge Protect**

CE, RHos Certificate

from 122 ~ 300mm (diameter) **Product Size**

from 6W ~ 24W Power Include











Series LYPSS (Surface Square)

PC Cover & PBT Housing Material

Aluminum Heat Sing Nickel-plated iron base

Lamp Base E27/B22/E14

CCT(Color temperature) 3000K/6500K

Working Voltage (AC/V) AC 100-277V

Lumen Efficiency (Lm/W) 100 lm/w

P.F. (power factor) 0.5 / 0.9

>80 **CRI**

Isolated **Driver**

1.5KV **Surge Protect**

CE, RHos Certificate

from 122 ~ 300mm (diameter) **Product Size**

from 6W ~ 24W Power Include



