


Pulp Properties

Type	C.S.F	Average Fiber Length	Moisture Content	T.G.A (in N ₂)
	[ml]	[mm]	[%]	[°C]
HP050	250 ~ 350	0.60 ~ 0.80	3.0 ~ 7.0	540 ~ 555
HP070	200 ~ 350	0.75 ~ 1.05	3.0 ~ 8.0	540 ~ 555
HP100	350 ~ 450	0.55 ~ 0.95	3.0 ~ 7.0	540 ~ 555
HP300	350 ~ 500	0.40 ~ 1.10	3.0 ~ 7.0	540 ~ 555
HP350	300 ~ 450	0.55 ~ 1.00	3.0 ~ 7.0	540 ~ 555
HP500	300 ~ 450	0.55 ~ 1.00	4.0 ~ 8.0	540 ~ 555
HP700	450 ~ 650	0.40 ~ 1.10	3.0 ~ 7.0	540 ~ 555
Test Method	TAPPI-227	TAPPI-271	TAPPI-412	-

- C.S.F ; Canadian Standard Freeness
- Average fiber length ; Valmet FS-300™ Fiber Length-weighted average length
- T.G.A ; Thermo Gravimetric Analysis
- TAPPI ; Technical Association of the Pulp and Paper Industry

Package	
kg/bag (net)	kg/pallet (net)
5.0	130

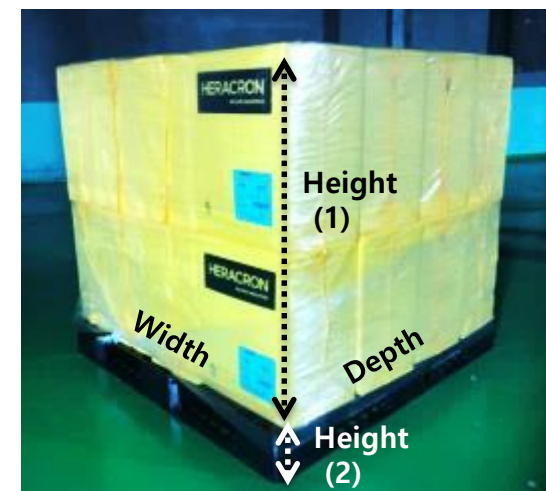

Dimension	
Width	1,100 mm
Depth	1,100 mm
Height (1)	880 mm
Height (2)	120 mm