

## MPC-10 upgrade instructions

### About

Through this document, users can upgrade the MPC-10 box by themselves. When DOREMiDi has a new firmware, it will be announced on the official website. Follow the official latest news:


<https://www.doremidi.cn/h-pd-48.html?fromColId=104>

**Upgrade system requirements:** Windows 7 or newer version of Windows system


**Step 1:** Press and hold the hidden button of MPC-10, and then connect the USB-C of MPC-10 to the computer. The indicator light of MPC-10 will flash, indicating that it has entered the firmware upgrade mode.



**Step 2:** Open "DOREMiDi Upgrade Tool", select USB, select the COM port to MPC-10, and click "Connect".

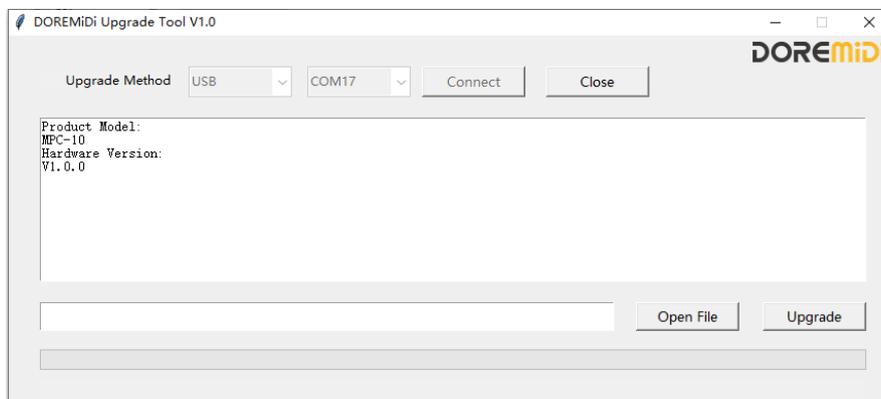

**Step 3:** Click "Open File", select the upgraded firmware MPC-10\_Vxxx, click "Upgrade", and wait for the upgrade to be completed "Upgrade completed!".

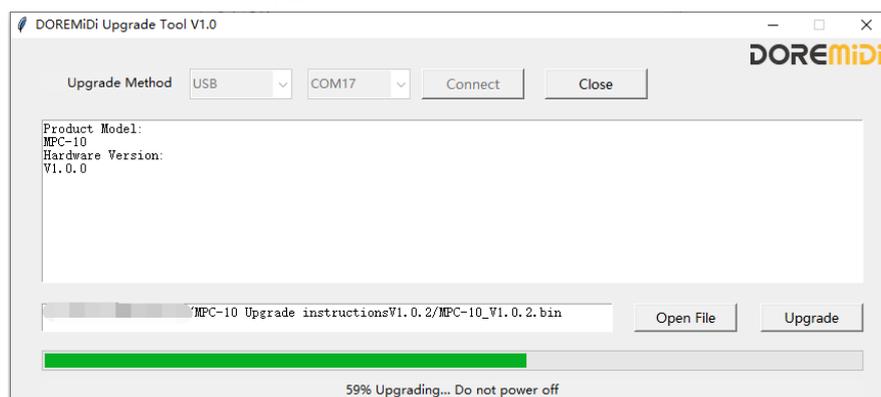

**Q:Can the upgrade tool be used on Macbook?**

A:No, the upgrade tool can only be used under Windows. It is recommended to use common versions such as Windows10.

**Q: How to determine the COM interface?**

A: After selecting the COM interface, please try to click "Connect". If it is not a DOREMiDi device, "time out" will be displayed.

**Q: After MPC-10 enters the upgrade mode, the computer USB cannot recognize the device.**

A: This may be because the computer lacks a driver, please try to install the "Firmware Upgrade Driver". Link: <https://www.doremidi.cn/h-pd-48.html?fromColId=104>