

DH72X

b Free

Single Digital Output Hall Effect Latch

Features

- Maximum output sink current 50mA
- Open-drain pre-driver
- Power reverse polarity protection
- Available in SIP-3L, SOT23(FS72XY) package

General Description

FS72X/FS72XY is a Hall sensor with latched digital output. It's suitable for electronic commutation of brushless DC motor applications. The FS72X/FS72XY uses a chopper amplifier for magnetic signal amplification, which can achieve a low offset and thus precise magnetic switching thresholds.

If a magnetic flux density larger than threshold Bop,NO is turned on(low). The output state is held until a magnetic flux density reversal falls below Brp causing NO to be turned off (high)

Block Diagram

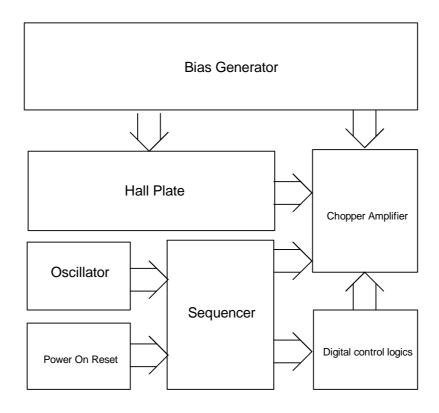


Figure.1



Pin Connection.

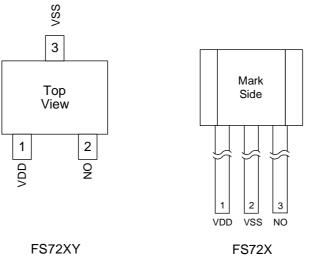


Figure 2

Pin Descriptions

| Name | I/O | FS72X | FS72XY | Description | | | |
|------|-----|-------|--------|-----------------------|--|--|--|
| VDD | Р | 1 | 1 | Positive power supply | | | |
| VSS | G | 2 | 3 | Ground | | | |
| NO | 0 | 3 | 2 | Driver output | | | |

Legend: I=input, O=output, I/O=input/output, P=power supply, G=ground

Functional Descriptions

Refer to the block diagram (Figure.1), FS72X/FS72XY is composed of the following building blocks:

Bias generator

The bias generator provides precise, temperature- and process-insensitive bias references for the analog blocks.

These references guarantee proper operation of the chip under all conditions specified in this specification.

Oscillator + Sequencer

The built-in oscillator provides the clock signal, which is taken by the sequencer to generate the sequential signals necessary for both the Hall sensor and the digital control logics

• Power on Reset

Used to detect the power-up ramp and reset the digital circuits to attain correct operation as soon as the power is ready.


• Chopper Amplifier

To achieve a higher magnetic sensitivity the chopper amplifier structure is adopted in this design. Use of this structure dynamically removes both the offset and flicker noise at the same time.

Digital control logics

Generates controlling signals for the Hall sensor.



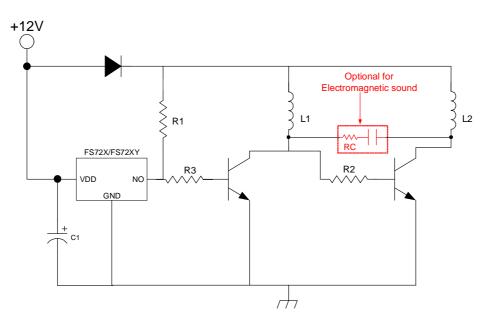

Brushless DC Fan


Figure.3

Note. Detail information please check application note. Suggestion value :R1=1K ohm,R3=330 ohm, R=30 ohm ,C=2.2uF, C1>0.1uF



Absolute Maximum Ratings

| Parameter | Symbol | Conditions | | Unit | | |
|-----------------------|----------------------|------------|------|------|------|------|
| Parameter | | | Min. | Тур. | Max. | Unit |
| Operating Temperature | T _{OP} | - | -20 | | 105 | °C |
| Storage Temperature | T _{ST} | - | -40 | | 150 | °C |
| DC Supply Voltage | V _{DD} | - | 2.4 | | 16 | V |
| Supply Current | I _{DD} | - | | | 10 | mA |
| Continuous Current | I _{O(CONT)} | | | | 50 | mA |
| Junction temperature | | | | | 150 | °C |
| Lead Temperature | | 10sec | | | 260 | C° |

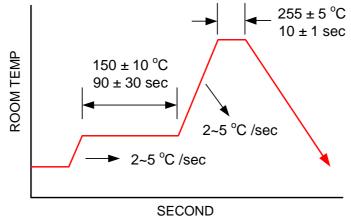

Soldering Condition

Figure.4



Recommended Operating Conditions

| Parameter | Symbol | | | Values | | Unit | |
|-----------------------------|-----------------|------------|------|--------|------|-------|--|
| Faranieter | Symbol | Conditions | Min. | Тур. | Max. | Offic | |
| Supply Voltage | V_{DD} | - | 2.4 | | 16 | V | |
| Operating Temperature Range | T _A | - | -20 | | 105 | °C | |


Electrical Characteristics V_{DD}=12.0V, T_A=25°C (unless otherwise specified)

| Deremeter | Symbol C | Conditions | Values | | | Unit |
|---------------------------------|-------------------|-----------------------|--------|------|------|------|
| Parameter | | Conditions | Min. | Тур. | Max. | Unit |
| Average Supply Current(no load) | I _{DD} | - | | 3.0 | 10 | mA |
| Output Saturation Voltage | V _{SAT} | lout= 50mA | | 0.5 | 0.8 | V |
| Output leakage current | I _{LEAK} | V _{OUT} =12V | | | 20 | μA |
| On resistance | R _{ON} | | | 10 | | Ω |

Magnetic Characteristics

| Deremeter | Symbol | Conditions | Values | | | Unit |
|----------------|-------------------|------------|--------|------|------|------|
| Parameter | Symbol | Conditions | Min. | Тур. | Max. | Unit |
| Operate Points | B _{OP} | | | +25 | | G |
| Release Points | B _{RP} | | | -25 | | G |
| Hysteresis | B _{HYST} | | | 50 | | G |

Hysteresis Characteristics

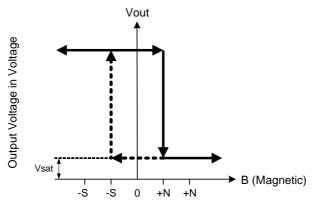


Magnetic Flux Density in Gauss

Figure.5




Marking Information

SIP-3L:

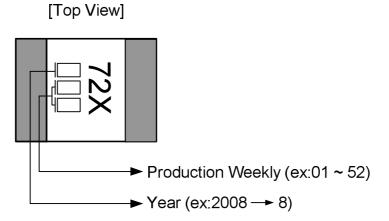

SOT23:

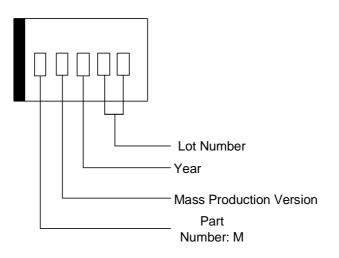






DH72X


Package Dimension (Unit: mm) <u>SIP-3L(Pb Free</u>)

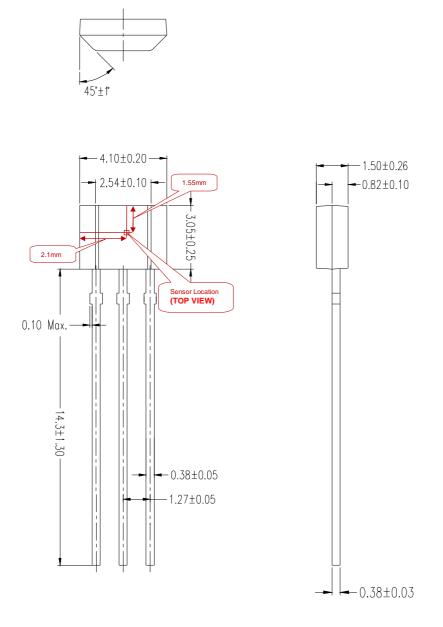





DH72X


<u>SOT23</u>

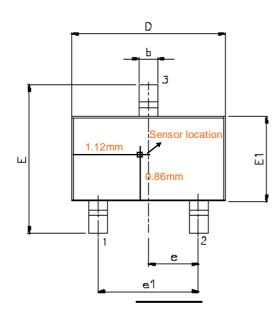

| 0 | Dimension In Millimeters | | | | | |
|---------|--------------------------|------|------|--|--|--|
| Symbols | Min | Nom | Max | | | |
| А | - | - | 1.45 | | | |
| A1 | - | - | 0.15 | | | |
| A2 | 0.90 | 1.15 | 1.30 | | | |
| b | 0.30 | - | 0.50 | | | |
| с | 0.08 | - | 0.22 | | | |
| D | 2.90BSC | | | | | |
| E | 2.80BSC | | | | | |
| E1 | 1.60BSC | | | | | |
| е | 0.95BSC | | | | | |
| e1 | 1.90BSC | | | | | |
| L | 0.30 0.45 0.60 | | | | | |
| L1 | 0.60REF | | | | | |
| L2 | 0.25BSC | | | | | |
| R | 0.10 | | | | | |
| R1 | 0.10 | 0.25 | | | | |
| Θ | 0° | 4° | 8° | | | |
| Θ1 | 5° | 15° | | | | |

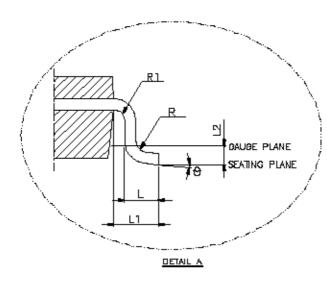









PACKING SPECIFICATION (Tapping Reel)

<u>SOT23</u>

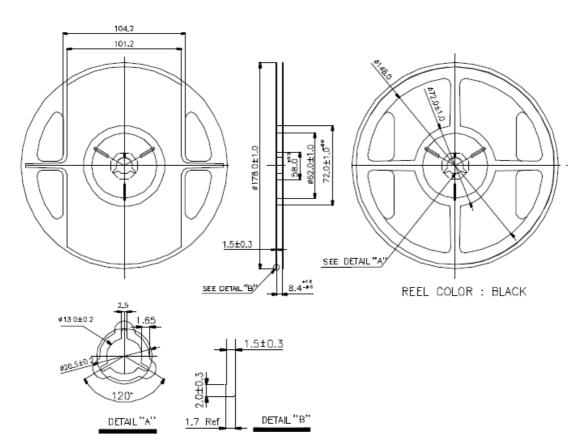

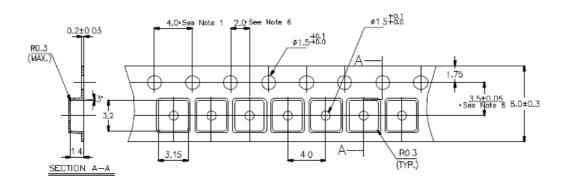


PACKING QUANTITY SPECIFICATION

2500ea / 1 Reel

4 Reels / 1 INSIDE BOX

2 INSIDE BOXes / 1 OUTSIDE BOX



DH72X



Order Information

| Part Number | Operating Temperature | Package | MOQ | Marking |
|-------------|-----------------------|---------|-------------|---------|
| DH72X-LF | -20 ℃ to +105 ℃ | SIP-3L | 1000ea | - |
| DH72XY-LF | -20 °C to +105 °C | SOT23 | 2500ea/Reel | Mxxxx |