


Full-Rotary CI Letterpress

Printing Machine
全轮转卫星式凸版印刷机

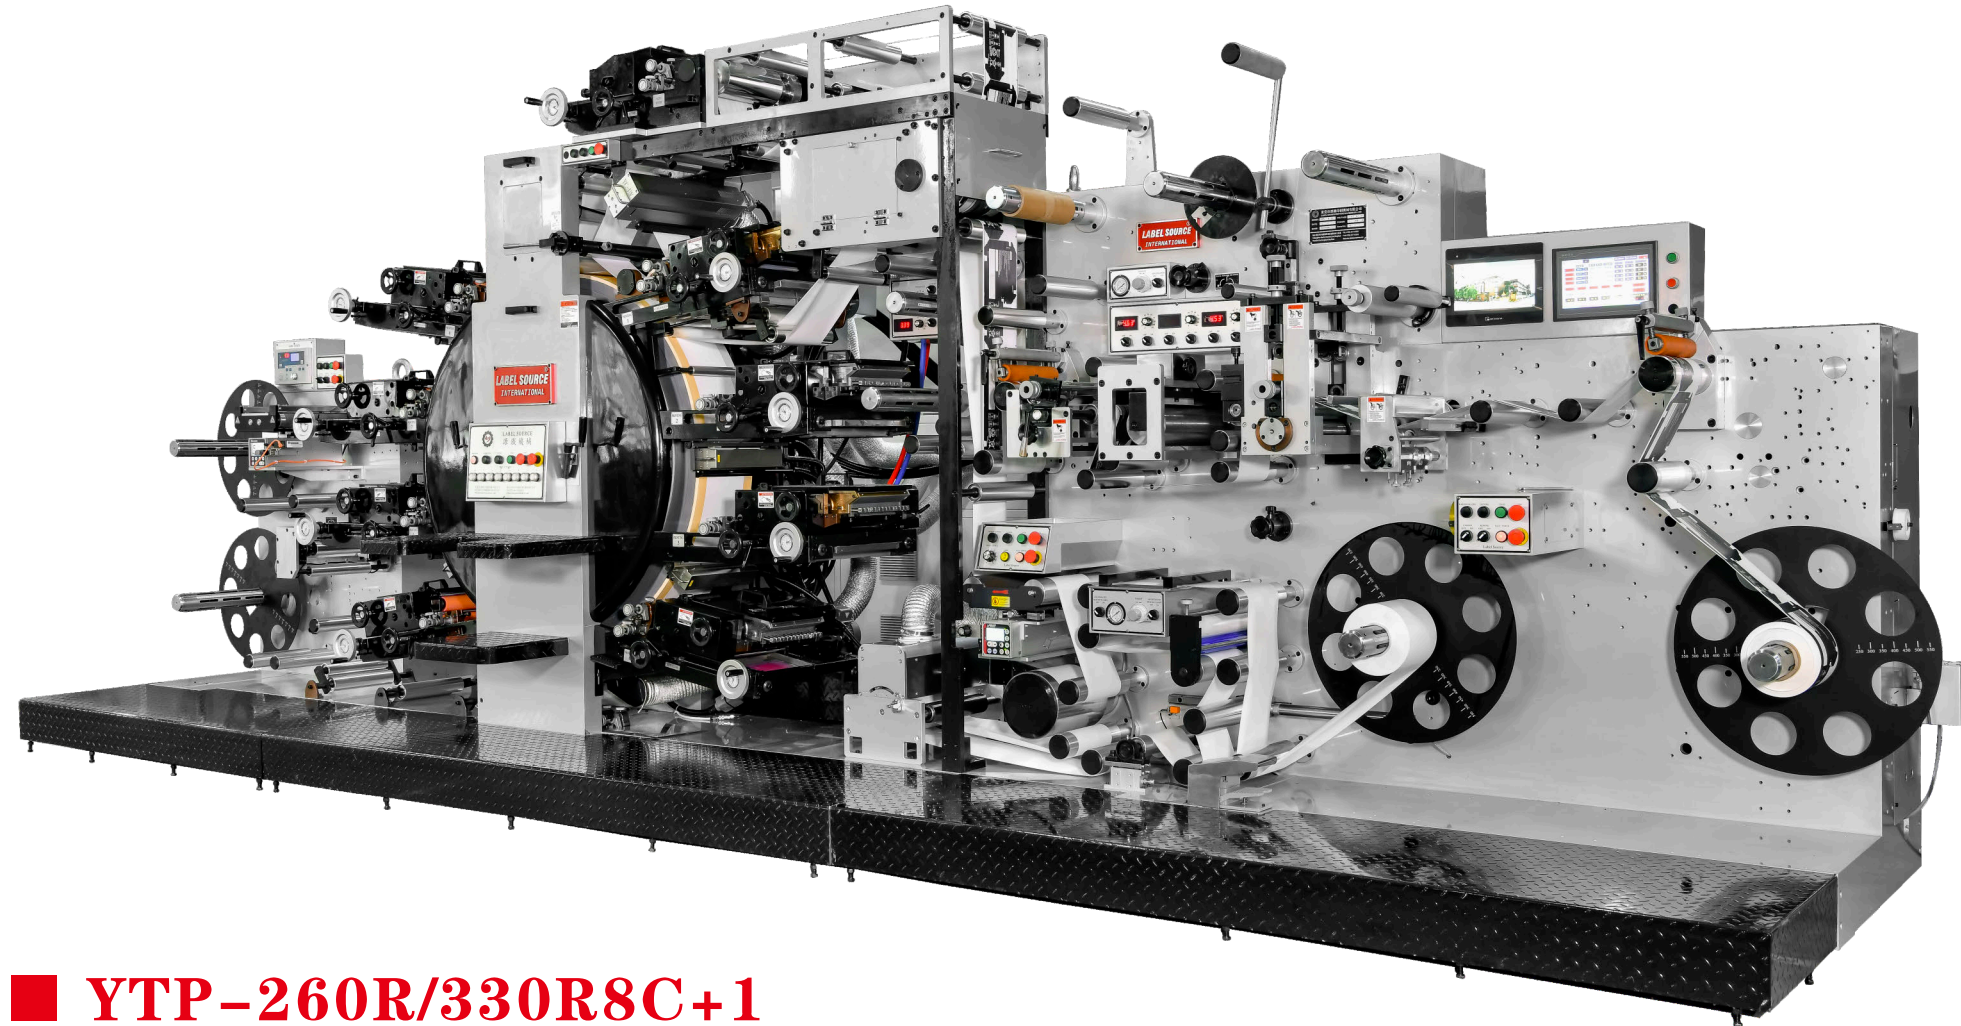

■ **YTP-260R/330R8C+1**
大八色结构 / Integrated Structure

LABEL SOURCE

Function description 功能說明

- ☉ Type A Dual Unwinding System (with tension control, corona treater, web guide and unwind/rewind)
- ☉ Sheeter station with conveyor platform
- ☉ The varnish station can realize partial varnish
- ☉ Rotary die cutting station can realize both fornt and back die cutting
- ☉ Corona treater
- ☉ Cold foil before printing
- ☉ Cold foil after printing
- ☉ Snowball waste rewind system
- ☉ A型双供料装置（含张力、电晕、纠偏、收放卷系统）
- ☉ 全穿成型模切工位及输送平台
- ☉ 上光油单元可实现局部上油
- ☉ 模切工位，可实现正背切
- ☉ 电晕处理系统
- ☉ 前冷烫单元
- ☉ 后冷烫单元
- ☉ 收废单元

Specification

产品规格

印刷座	Printing Station	(Sets)	8
上金油	Flexo varnishing station	(set)	1
传动齿轮	Power transmission gearing	(cp)	1/8"
最大纸宽	Max.web width	(mm)	260/330
最大印刷宽	Max.printing width	(mm)	250/320
印刷色数	Printing Unit	(C)	2C-12C
材料厚度	Substrate Thickness	(mm)	0.04~0.4
印版厚度	Print Plate Thickness	(mm)	0.95
印刷周长	Print Length	(mm)	190.5-460.375
印刷速度	Printing Speed	(m/min)	5-100
最大放卷直径	Unwind Roll Dia.max	(mm)	800
最大收卷直径	Rewind Roll Dia.Max	(mm)	800
UV 干燥机	UV Dryer	LED UV/传统汞灯	
机械重量 Machine weight	净重: Net weight	(kgs)	8100/9000
	毛重: Gross weight	(kgs)	9100/10000
耗电与马达 Power & Motor	主机马达: Main Motor	380V(kw)	11
	匀墨马达 (10个) : Stirring motor(10PCS)	(w)	1600
	UV干燥11套 (UV dryer 10 sets) 5KW/PC 10LAMPS 7KW/PC 1LAMPS	(kw)	47
机械尺寸	Machine Size L*W*H	(m)	6.4*1.6(1.9)*2.6

Standard Accessories

标准配备

印刷座	八座	Printing station	8 Sets
版胴(尺寸任选)	五套	Printing cylinder(Size Optional)	5 Sets
UV	八座	UV dryer	8 Sets
修纸边	一套	Paper Slitting System	1 Set
工具	一套	Tools	1 Set
贴版台	一套	Plate Mounting Frame	1 Set
对边器	一套	Aotomatic web guiding system	1 Set
接纸台	一套	Splicing platform	1 Set
上金油座(含UV系统)	一套	Flexo varnishing System with UV dryer	1 Set

选购配件 Options Accessories

冷烫系统	Coldfoil stamping system
凹版印刷系统	Intaglio printing system
圆网版印刷系统	Rotary screen printing system
切单张系统	Sheeting system
静态观测系统	Static observation system
冷却系统	Cooling system
可乐娜表面处理器	Corona treater (Foil can be treated)
胶面和背面印刷设备	Back side printing device
圆玺模切座	Rotary Die Cutting Device
静电消除器	Electrostatic Eliminator
上护膜(有、无底纸均可)	Opp Laminating System

Auitable Materials

适用范围

适用材料: 贴纸、积层材、BOPP膜、收缩膜、石化耐愿环保材料 料和特殊材料等	Suitable materials: Self-adhesive papers, Laminated Tubes, BOPP Films, Shrinkable Film Styrofoam and other Special materials
适用刀膜: 磁性圆刀模、雕刻圆胴刀模	Suitable Die-Cutter: Magnetic Rotary Die-Cutters, Graved Rotary Die-Cutters
印版版材: 树脂版	Standard Plate Making Reference: Photopolymer Plate
版材硬度: 45-55度	Plate Hardness: 45°-55°
版材厚度: 0.95mm	Plate Thickness: 0.95mm
洗刷深度: 0.69mm(参考)	Washing Depth: 0.69mm(Reference)