


Single Color Screen Machine

+Embossing hot stamping

单色丝网印+凸字烫印刷机

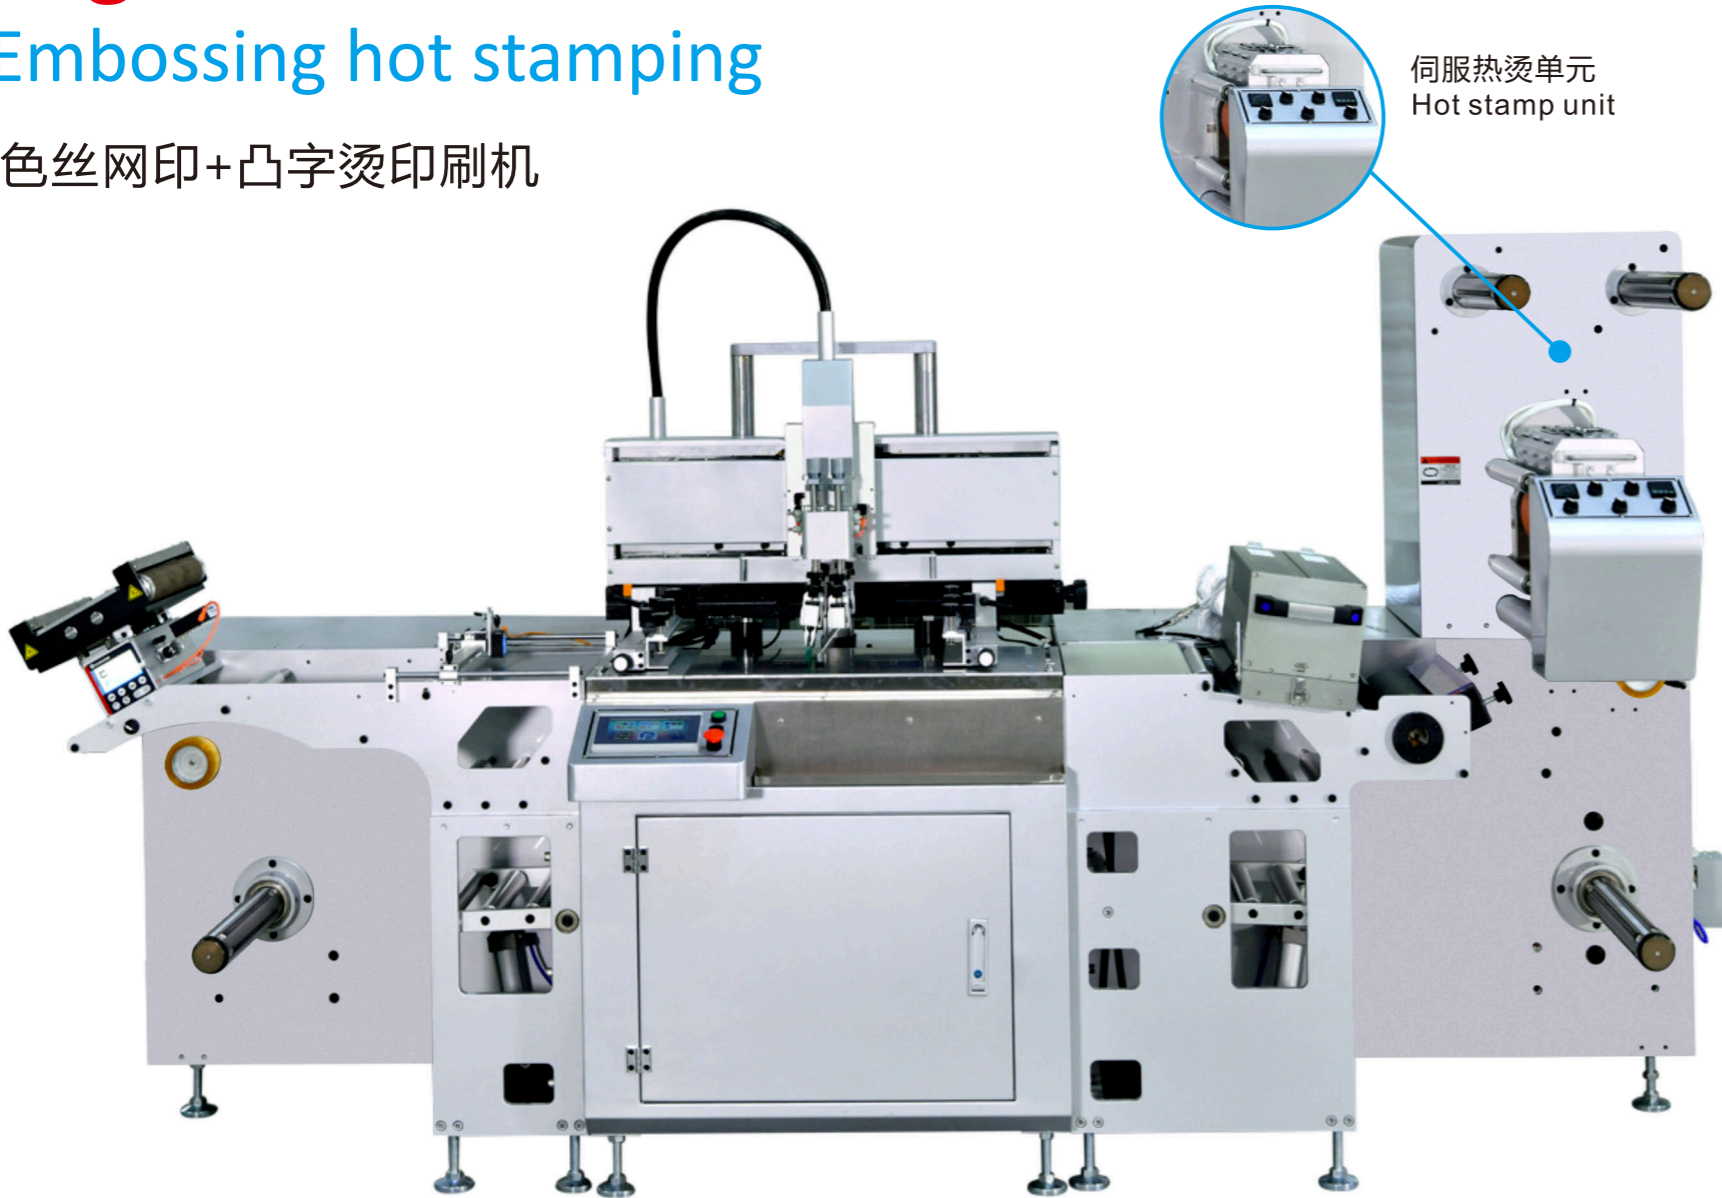

■ SWP-330-1C+1

Function description

功能說明

- ◎ 全伺服控制驱动控制，结构简单，操作智能简便，印刷品质。可承印各种印刷材料，如自粘不干胶，特龙多，PET，PVC，转印膜，薄膜，软性电路板等材料；
- ◎ 伺服放料单元含伺服、张力、纠偏接纸台、超声波电眼；
- ◎ 印刷单元含刮墨伺服，吸风系统，色标电眼；
- ◎ 收料单元含收料伺服，圆烫伺服，热烫系统，张力；
- ◎ UV系统可选单灯/双灯系统。
- ◎ Full servo control drive control, simple structure, intelligent and simple operation, and printing quality. Can print all kinds of printing materials, Such as self-adhesive sticker, Tronduo, PET, PVC, transfer film, film, flexible circuit board and other materials;
- ◎ Sevro unwinder unit: Including servo, tension, correction paper table, ultrasonic electric eye;
- ◎ Printing unit:Including ink scraping servo, suction system, color code electric eye;
- ◎ Rewinder unit:Including rewinding servo, round ironing servo, ironing system, tension;
- ◎ UV: Single/double (option)

Specification

产品规格

机型	Model	SWP-330-1C+1	
最大网框面积	ScreenFrame Standards	(mm)	450*650
最大印刷面积	Max.Print Area	(mm)	330*450
最大走纸宽度	Max.Paper Width	(mm)	370
印刷速度	Printing Speed	(imp/min)	20-100
机械尺寸	Placement size L*W*H	3350*2200*1850MM	




All Servo Roll to Roll 2 Color Screen

Printing Machine with Embossing Hot Foil and Flat-bed Die-cutting Station

全伺服卷对卷双色（凸字烫金 + 定位模切）丝网印刷机

■ SWP-330-2C+2C-CNC

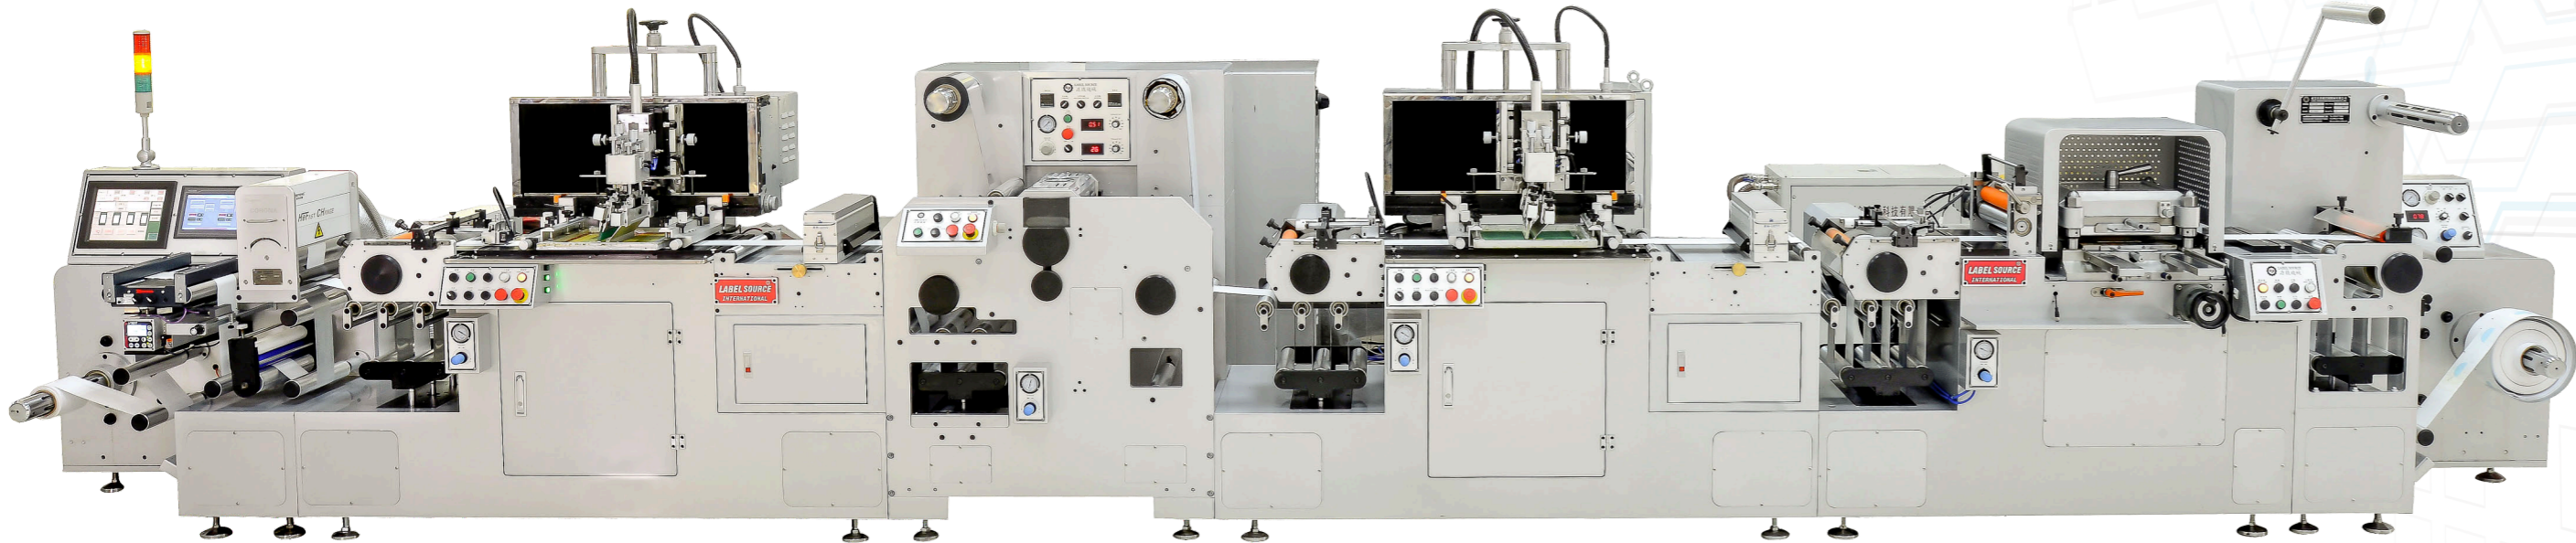

Industries Application

特殊行业应用

- 1>适合复合管、全塑管片材印刷， 联线实现定位热烫及凸字烫金、模切、切片、多色组印刷、局部上光油及在线分条等功能；
 - 2>适用于电子产品保护膜、线路板及高端日化产品，全机通过伺服张力控制，走纸时材料无刮痕，另可实现在线模切，定位冲孔，单张或卷对卷出标；
 - 3>特殊材料；
 - 4>烟包特色印刷。
- 1>Suitable for laminated tube and PBL/ABL printing, inline combination of positioning hot foil and embossing, die cutting, slicing, multi-color printing, partial varnish and online slitting functions;
- 2>Suitable for electronic product protective film, circuit board and high-end daily chemical products.Adopt servo-controlled tension system, no scratched during web feeding. Additional functions include positioning punching, sheeter etc;
- 3>Special substrate printing;
- 4>Special cigarette packs printing.

Function description 功能說明

- ◎ Servo control unwind system
 - ◎ Tension control system
 - ◎ Corona treater
 - ◎ Web guide system
 - ◎ Die-cutting station
 - ◎ Anti-scratch device
 - ◎ LED UV with chiller system
 - ◎ Electromagnetic embossing unit
 - ◎ Servo control ink scraper system
 - ◎ Anti-stretch device and second pass printing
- ◎ 伺服送料单元
 - ◎ 张力控制系统
 - ◎ 电晕处理系统
 - ◎ 纠偏系统
 - ◎ 模切单元
 - ◎ 防刮伤装置
 - ◎ LED水冷UV系统
 - ◎ 电磁加热凸字烫金单位
 - ◎ 伺服控制刮墨系统
 - ◎ 抗拉伸多次追印系统

Specification

产品规格

机型	Model	SWP-330-2C+2C-CNC	
网框规格	ScreenFrame Standards	(mm)	450*650
最大印刷面积	Max.Print Area	(mm)	330*450
最大纸宽	Max.Paper Width	(mm)	370
印刷速度	Printing Speed	(imp/min)	20-100
最大放卷直径	Unwind Roll Dia.max	(mm)	800
最大收卷直径	Rewind Roll Dia.Max	(mm)	800
机械尺寸	Machine Size L*W*H	(mm)	8810*2200*1800
机械重量	Machine weight	(kg)	7000

Options

选购配件

色组扩充	Color Station Expansion
切片装置	Slicing device
联机除尘系统	On-line dust removal system
除静电装置	Anti-static device
覆保护膜装置	Protect film laminate unit
红外线隧道式烤箱	Infrared tunnel oven
收保护膜装置	Protect film rewind unit